

MODEL 889 ADV-XTREME

HIGH SPEED, HIGH PERFORMANCE, FULL-VIEW METAL DOOR



High speed, visibility, and durability

HIGH PERFORMANCE DESIGN

- Springless design for over 1 million cycles and requires minimal interruption for maintenance
- Gravity drive system coupled with variable frequency drive eliminates sudden jolts from door start/stop
- Direct-mounted gear drive minimizes wear and tear

DURABLE CONSTRUCTION

- Full-view door with corrosion-resistant aluminum and clear vision, impact-resistant polycarbonate panels
- Steel head plate utilizes high strength, durable rollers to prevent metal curtain contact and provides smooth operation
- Independently-tested and capable of withstanding pressure of up to 50 psf

INSTALLER FRIENDLY

- Fully-assembled curtain arrives pre-wrapped in head plate and trusses, ready for installation
- Completely hinged guide
- Pre-wired motor connection and plug and play accessories reduces the need for a licensed electrician

SAFETY FOCUSED

- Patent-pending integrated curtain monitoring device ensures the door has a redundant system to monitor the position of the door
- Safety light curtain minimizes contact with objects in the doorway
- Monitored wireless reversing edge

APPLICATIONS

- Auto dealerships
- Retail
- Manufacturing



MODEL 889 ADV-XTREME

HIGH SPEED, HIGH PERFORMANCE, FULL-VIEW METAL DOOR


STANDARD FEATURES OVERVIEW

OPENINGS	Exterior/Interior (mount inside)
MAX WIDTH	20'
MAX HEIGHT	21'
MAX OPENING SPEED	Up to 80" per second
MAX CLOSING SPEED	Up to 20" per second
WIND LOAD*	Up to 50 psf
CURTAIN MATERIAL	Aluminum and scratch-resistant polycarbonate
VISION	Scratch-resistant polycarbonate panels
OPERATION	Direct drive motor and gearbox system with field changeable universal handing and door stop safety device
CONTROL PANEL	Variable frequency drive NEMA 4X cULus listed; Onboard self diagnostic and service reminder; Built-in padlockable fused disconnect
OBSTRUCTION SAFETY DETECTION	Integrated light curtain
REVERSING SAFETY EDGE	Wireless reversing edge
AVAILABLE SUPPLY VOLTAGES	230V AC 3 PH, 460V AC 3 PH, 575V AC 3 PH† (†Requires stand-alone mounted transformer)

*Wind load is the ultimate pressure tested at door width of 15'.

OPTIONS


- **Slim guide available** – to reduce jamb side room (size limitations may apply)
- **Multiple actuation options** – push button, motion detector, radio control, key switch, pull switch, loop detector, treadle switch. Wireless options available
- **Signaling devices** – red/green LED warning light, horn/strobe combination, rotating warning light
- **Square hood**
- **Photo eyes**
- **Programmable LED Lighting Package** – 3' tall light bar with red, yellow, green lights
- **Perforated slat** – up to four slats with 24% open area (up to 20' width)

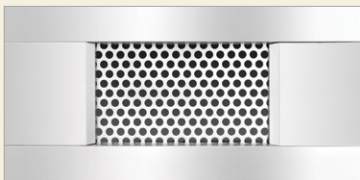

Perforated Slat (optional)

COLOR OPTIONS

Guide/Slats/
Bottom bar



Silver powder coat***
(Standard)

Bracket/Hood
Structure



Black powder coat
(Standard)

***Silver powder coat made to mimic anodized aluminum.

Standard color for guides and bottom bar is yellow.
Approximately 200 optional RAL powder coat colors are also available.



Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Wayne Dalton Dealer for accurate color matching.



Wayne Dalton
COMMERCIAL DOORS

2501 S. State Hwy. 121 Bus., Ste 200
Lewisville, TX 75067

wayne-dalton.com



© 2023 Wayne Dalton, a Division of Overhead Door Corporation. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.
Item W900-1135 10/23