


#2 SLAT SECTION


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
700	24'	24'

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
OPERATION OPTION	<input type="checkbox"/> PUSH-UP <input type="checkbox"/> CHAIN HOIST <input type="checkbox"/> CRANK <input type="checkbox"/> ELECTRIC MOTOR

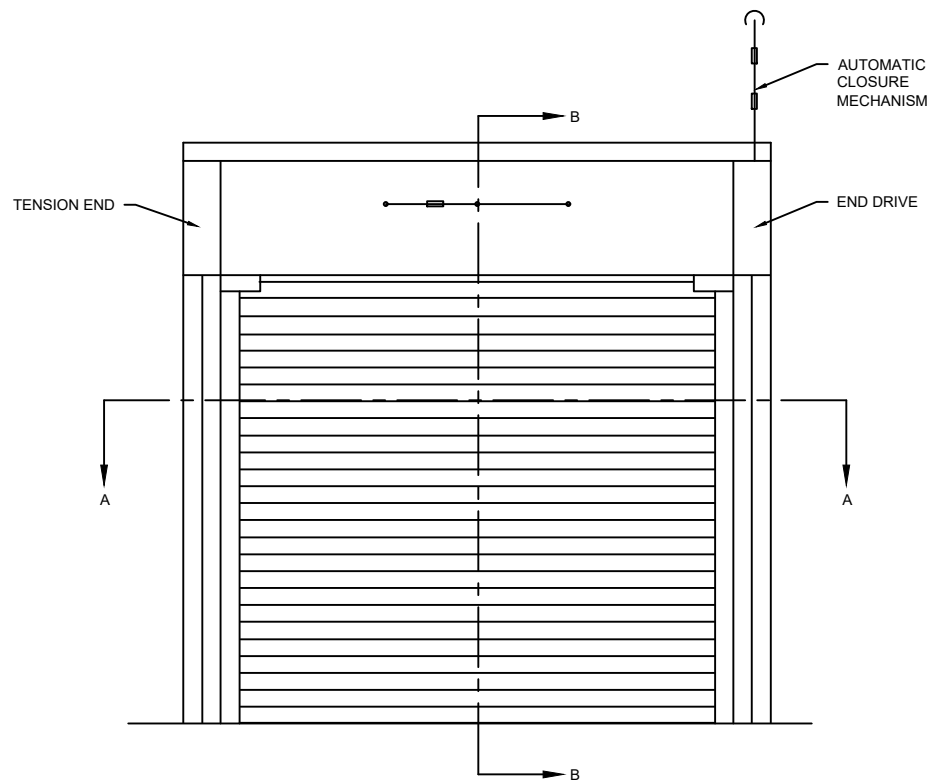

ELEVATION

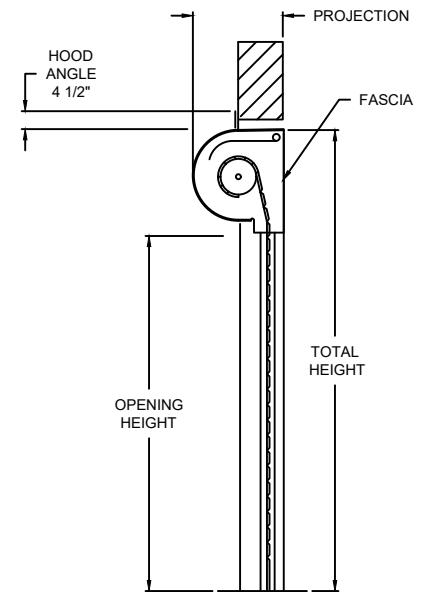

SECTION B-B

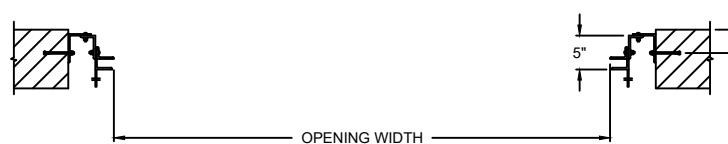

SECTION A-A

PROJECTION	
MIN.	MAX.
14" X 16"	26" X 28"

FIRESTAR®

700 FIRE RATED ROLLING SERVICE DOOR - BETWEEN JAMBS

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	PAINTED GALVANIZED / STAINLESS STEEL	MANUAL PUSH UP	- WARRANTY: 2-YEAR LIMITED; 3-YEAR/20,000 CYCLES LIMITED ON OVERHEAD DOOR™ DOOR AND OPERATOR SYSTEM (WHEN PURCHASED TOGETHER)
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL DOUBLE ANGLE		

DWG. NO.	DATE:	
SHEET	BY:	