



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL




STRAIGHT WITH POLYCARBONATE SLAT DETAIL


OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED ☐ EXTRUDED ☐ EXTRUDED W/ TUBE ☐ HIGH USAGE

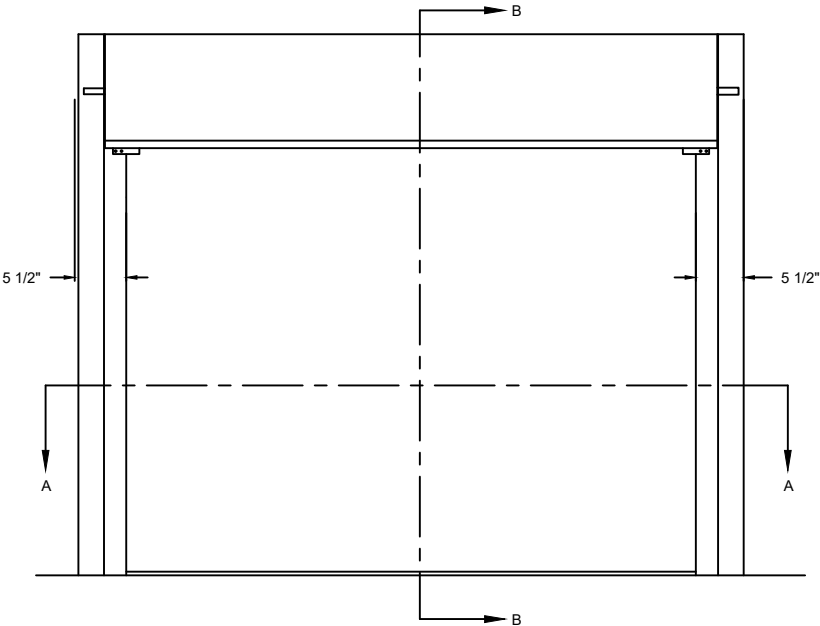

ELEVATION

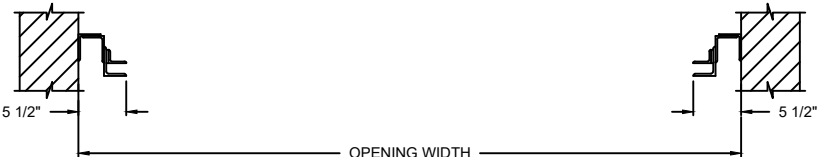

SECTION A-A

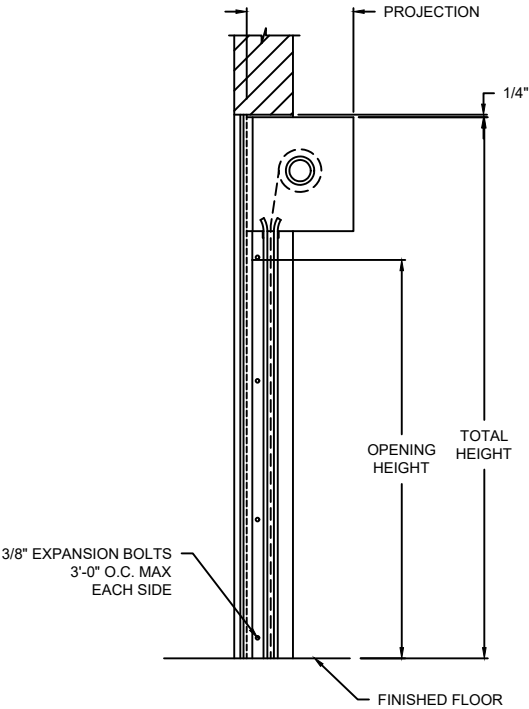

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	MANUAL PUSH UP	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		


SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED ☐ EXTRUDED ☐ EXTRUDED W/ TUBE ☐ HIGH USAGE

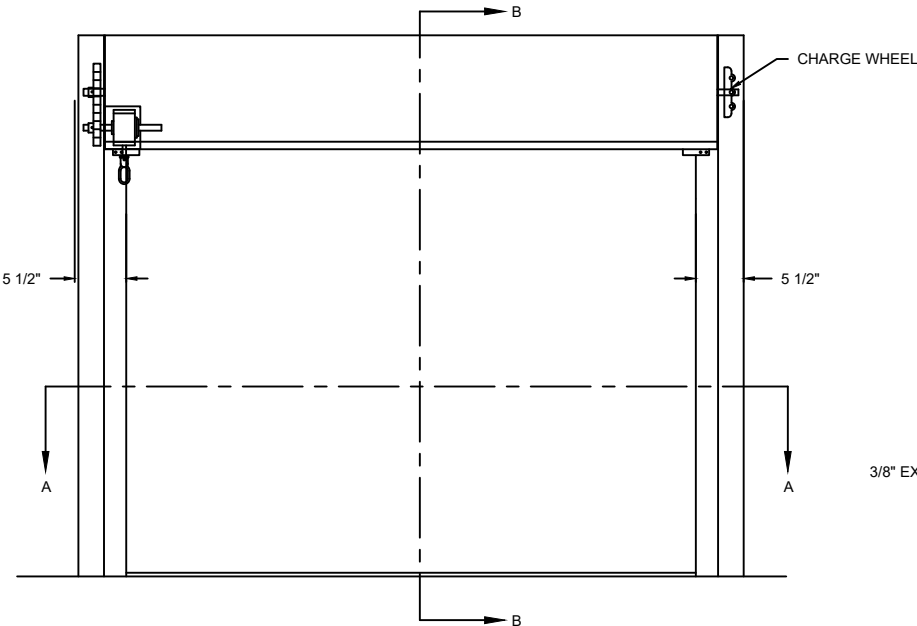

ELEVATION



SECTION A-A

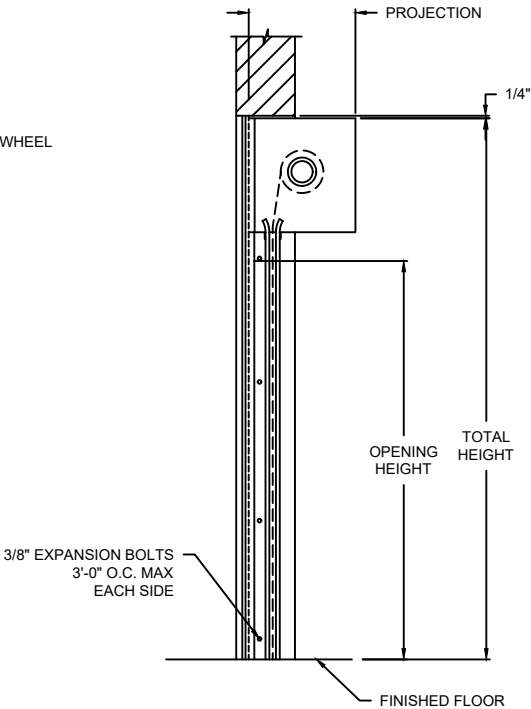

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES


600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	CRANK LH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED ☐ EXTRUDED ☐ EXTRUDED W/ TUBE ☐ HIGH USAGE

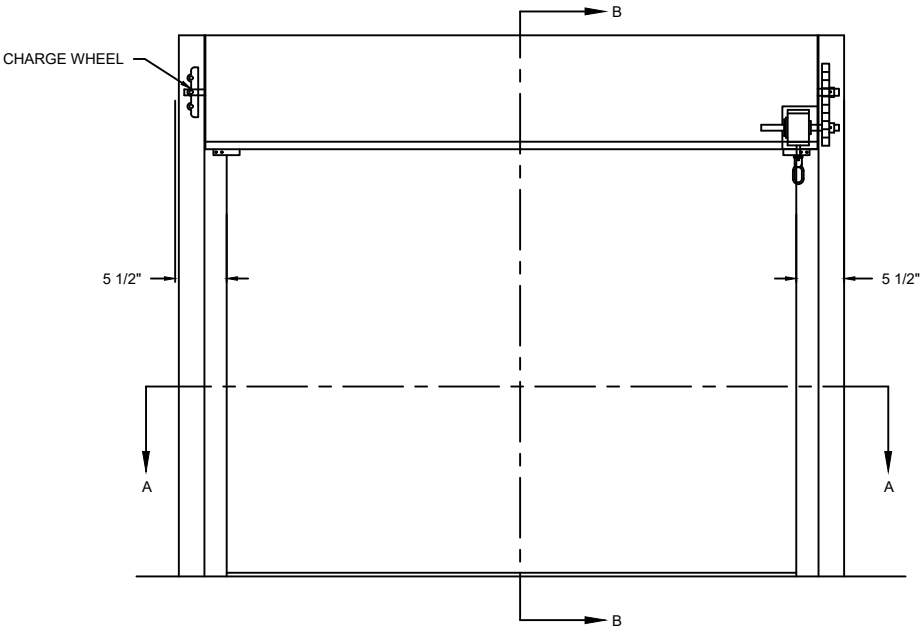

ELEVATION



SECTION A-A

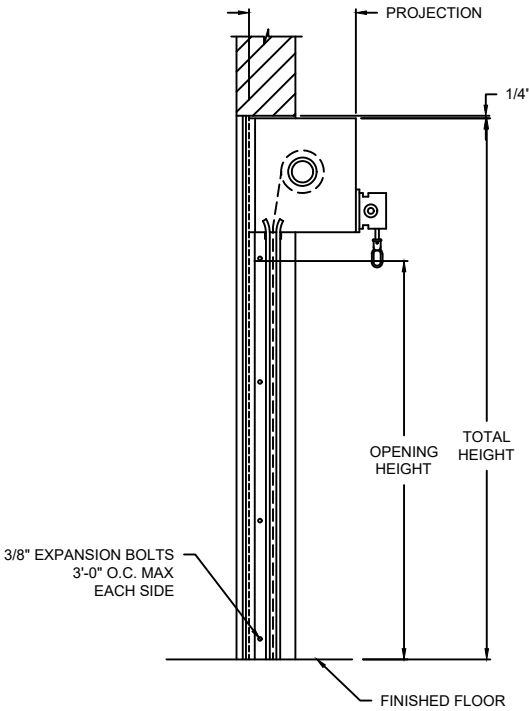

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	CRANK RH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		

DWG. NO.	DATE:	
SHEET	BY:	



OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS

SLAT OPTIONS

☐ STRAIGHT

☐ STAGGERED BRICK


☐ POLYCARBONATE

HOOD OPTIONS

☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS


☐ ANGLED
☐ EXTRUDED
☐ EXTRUDED W/ TUBE
☐ HIGH USAGE




PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS


- ☐ ANGLED
☐ EXTRUDED
☐ EXTRUDED W/ TUBE
☐ HIGH USAGE

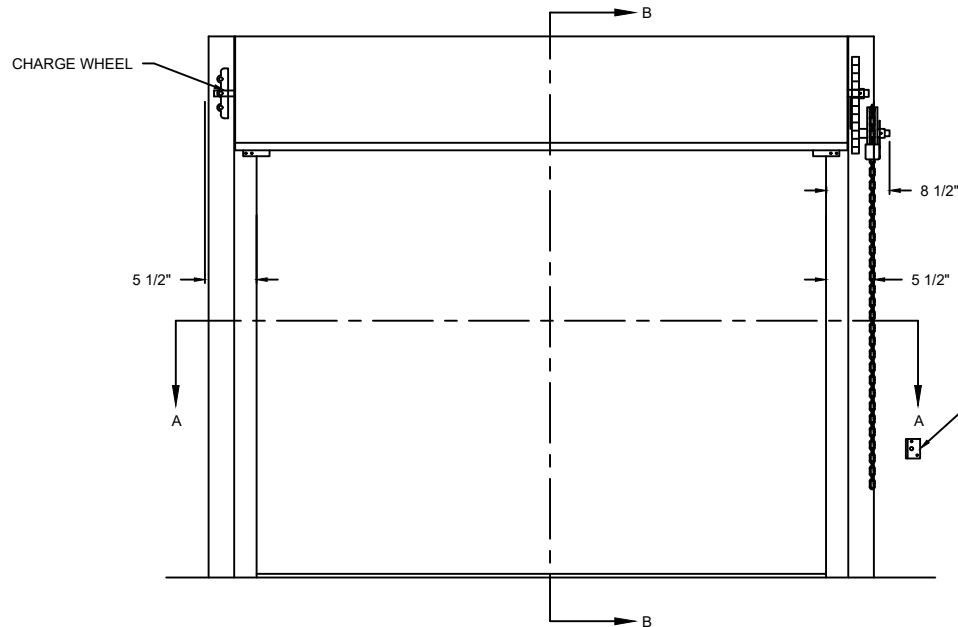

ELEVATION



SECTION A-A

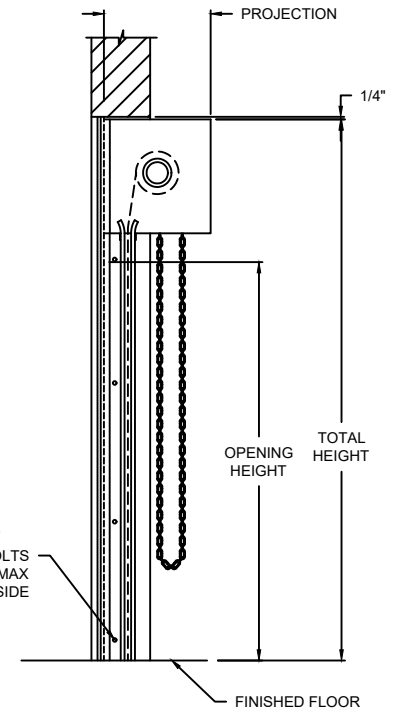

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES


600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	CHAIN HOIST RH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL


OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED ☐ EXTRUDED ☐ EXTRUDED W/ TUBE ☐ HIGH USAGE

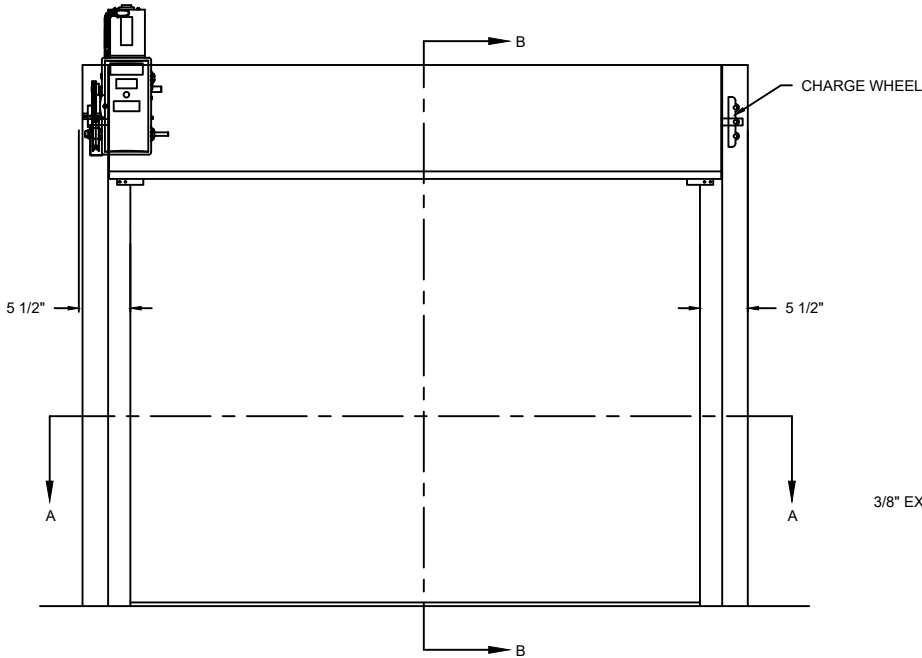

ELEVATION



SECTION A-A

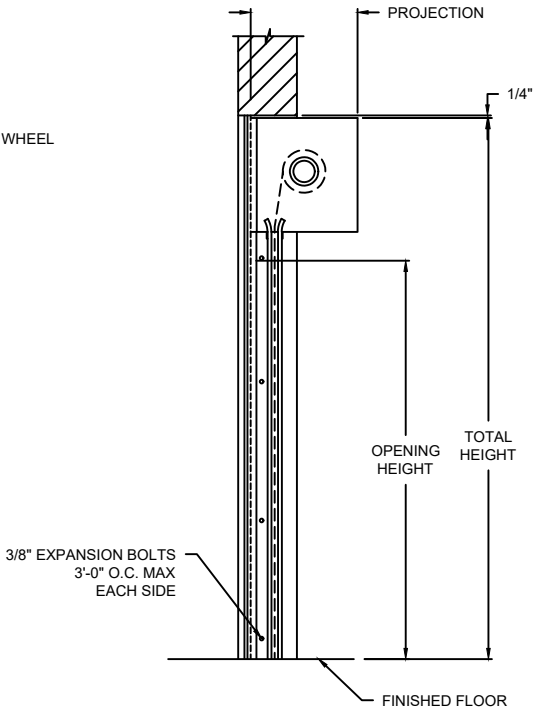

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	RHX FOH LH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		


SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
- ☐ STAGGERED BRICK
- ☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
- ☐ ON (OCTAGON)
- ☐ ON (ROUND)
- ☐ HOOD SUPPORT

GUIDE OPTIONS


- ☐ ANGLED
- ☐ EXTRUDED
- ☐ EXTRUDED W/ TUBE
- ☐ HIGH USAGE

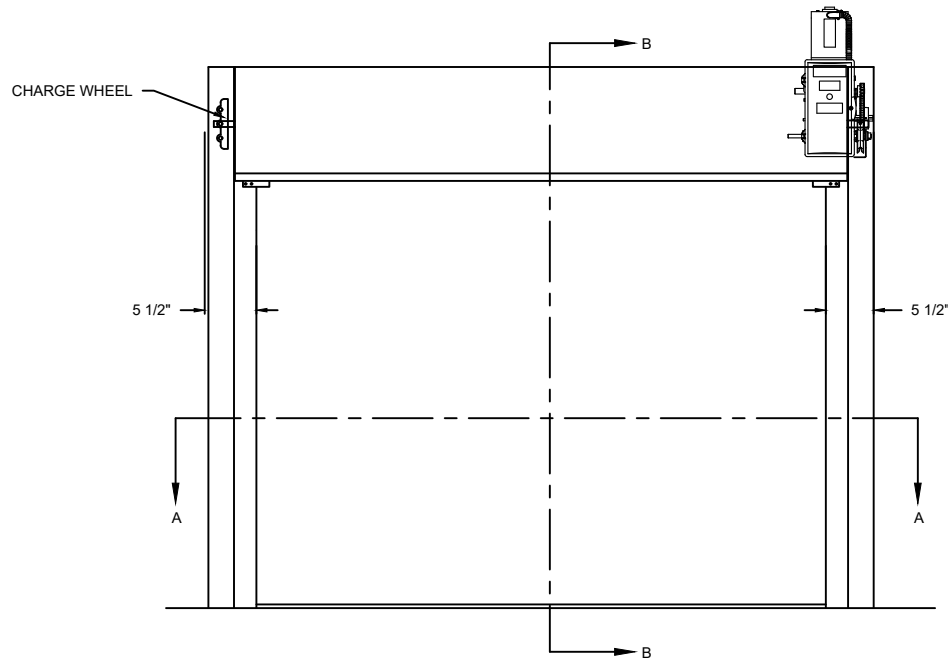

ELEVATION



SECTION A-A

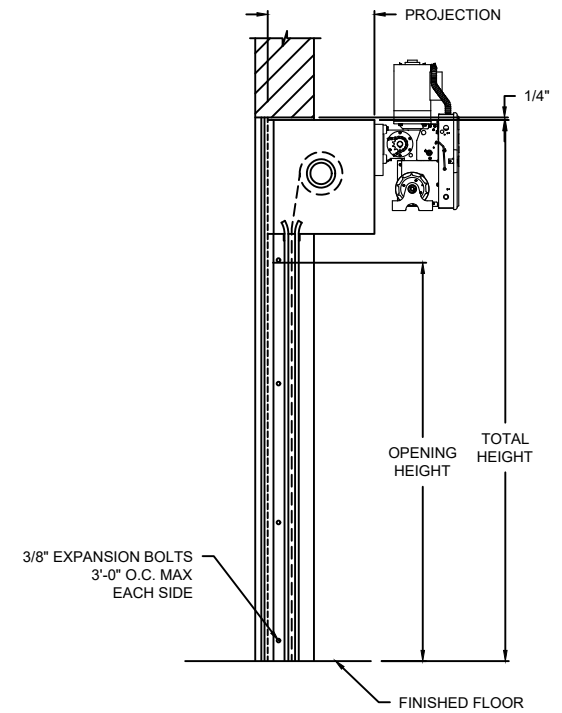

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - BETWEEN JAMBS

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	RHX FOH LH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		

DWG. NO.	DATE:	
SHEET	BY:	