



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS


- ☐ ANGLED E
☐ ANGLED Z
☐ EXTRUDED E
☐ EXTRUDED Z
☐ HIGH USAGE E
☐ HIGH USAGE Z

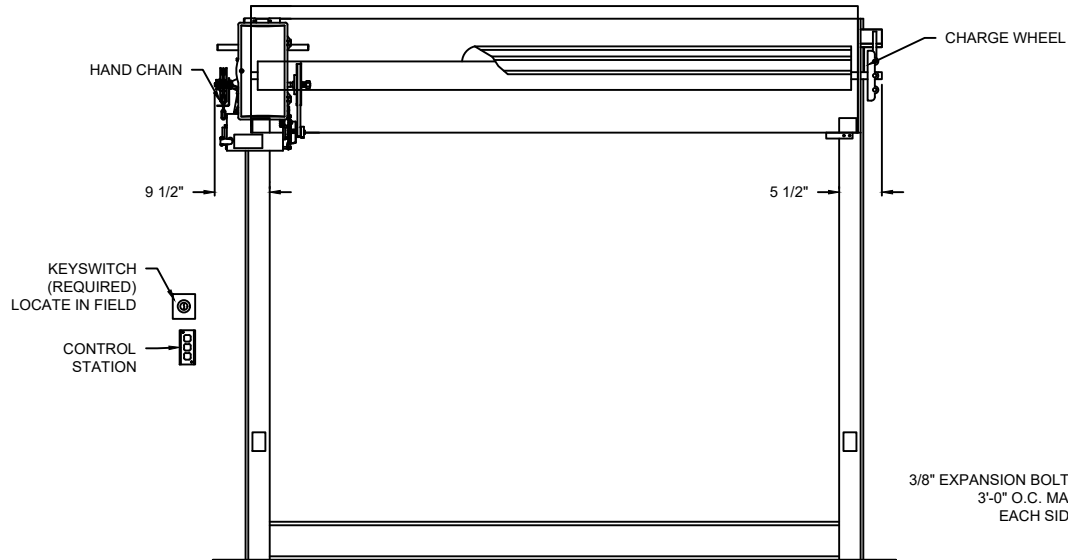

ELEVATION



SECTION A-A

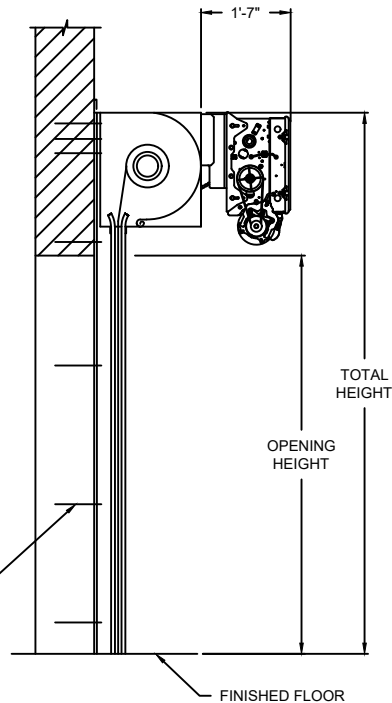

SECTION B-B

PROJECTION	
MIN.	MAX.
16" X 18"	18" X 20"

SECURITY GRILLES

600 EES UPWARD COILING SECURITY GRILLES

COMPONENT

MATERIAL

OPERATION

NOTES:

CURTAIN

ALUMINUM

GUIDES

EXTRUDED ALUMINUM

BOTTOM BAR

EXTRUDED ALUMINUM

RSX FOH
LH

- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101


DWG. NO.

DATE:


SHEET

BY:


Wayne Dalton



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS


- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS

- ☐ ANGLED E
☐ ANGLED Z
☐ EXTRUDED E
☐ EXTRUDED Z
☐ HIGH USAGE E
☐ HIGH USAGE Z

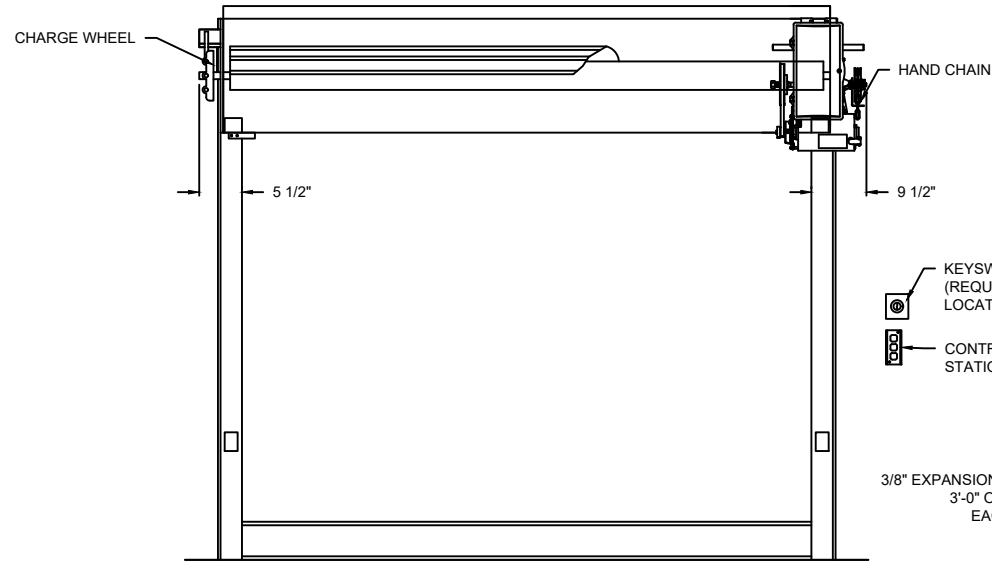

ELEVATION

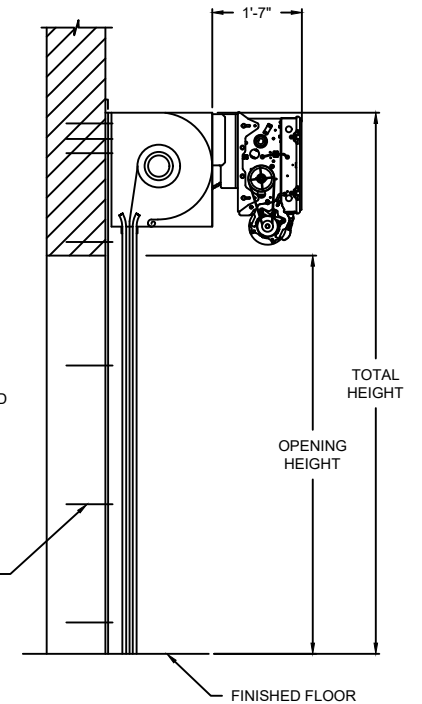

SECTION B-B

PROJECTION	
MIN.	MAX.
16" X 18"	18" X 20"



SECTION A-A

SECURITY GRILLES

600 EES UPWARD COILING SECURITY GRILLES

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	RSX FOH LH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		

DWG. NO.	DATE:	
SHEET	BY:	