



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED E ☐ ANGLED Z ☐ EXTRUDED E ☐ EXTRUDED Z ☐ HIGH USAGE E ☐ HIGH USAGE Z


COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	MANUAL PUSH UP	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		

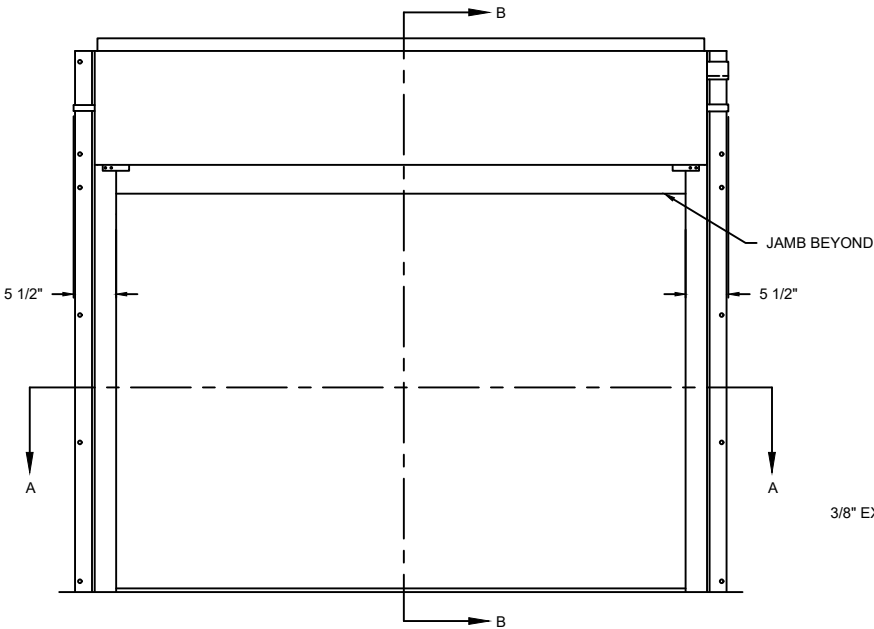

ELEVATION



SECTION A-A

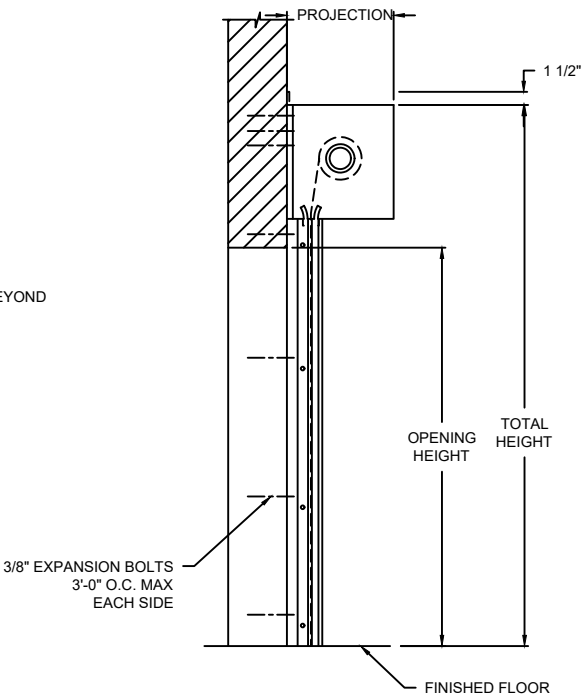


SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"


SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS

- ☐ ANGLED E
☐ ANGLED Z
☐ EXTRUDED E
☐ EXTRUDED Z
☐ HIGH USAGE E
☐ HIGH USAGE Z

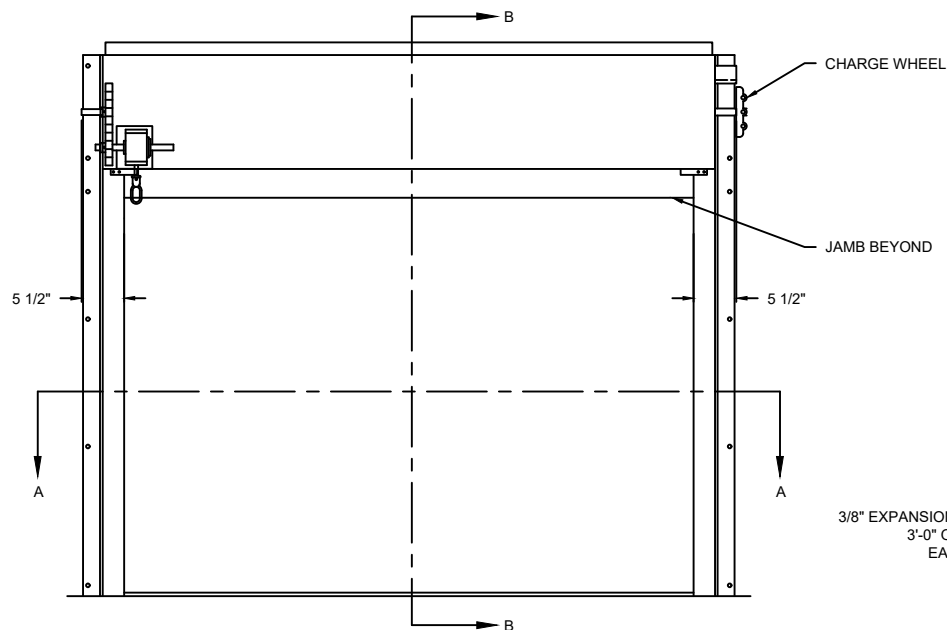

ELEVATION




SECTION A-A

CHARGE WHEEL

JAMB BEYOND

3/8" EXPANSION BOLTS
 3'-0" O.C. MAX
 EACH SIDE

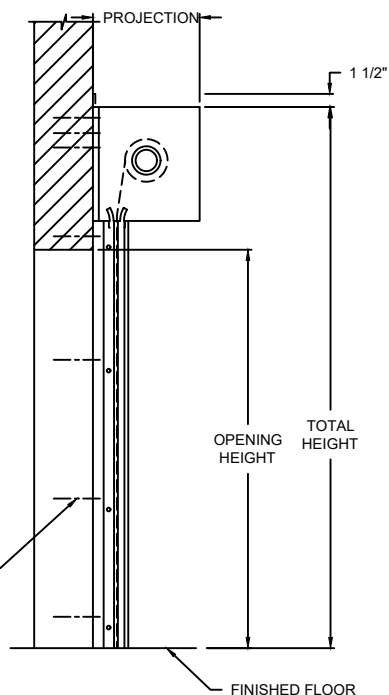

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT

COMPONENT

MATERIAL

OPERATION

NOTES:

CURTAIN

ALUMINUM

GUIDES

EXTRUDED ALUMINUM

BOTTOM BAR

EXTRUDED ALUMINUM

CRANK LH

- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101


DWG. NO.

DATE:


SHEET

BY:


Wayne Dalton



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED E ☐ ANGLED Z ☐ EXTRUDED E ☐ EXTRUDED Z ☐ HIGH USAGE E ☐ HIGH USAGE Z

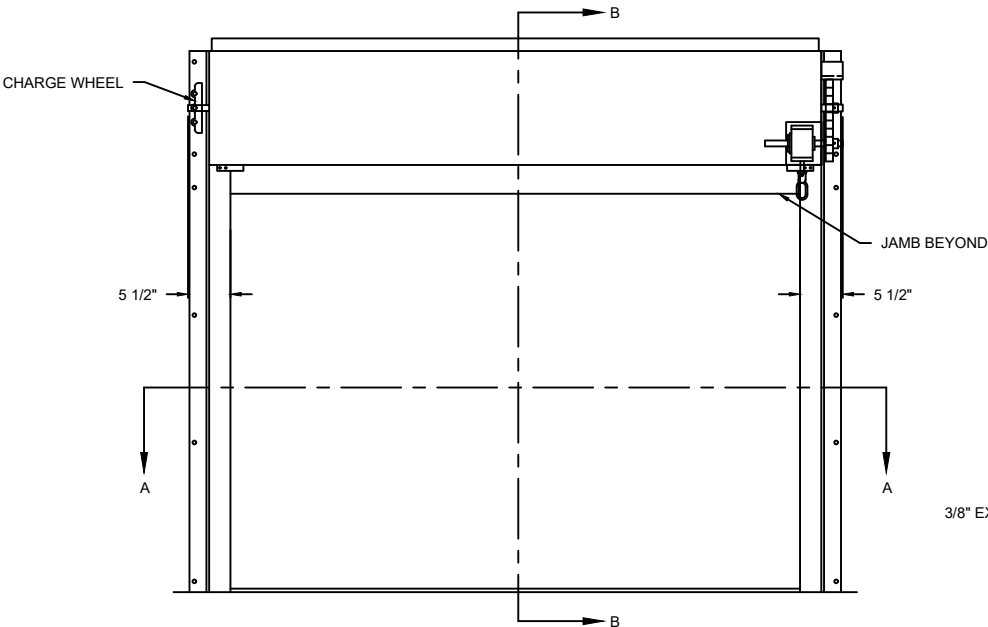

ELEVATION



SECTION A-A

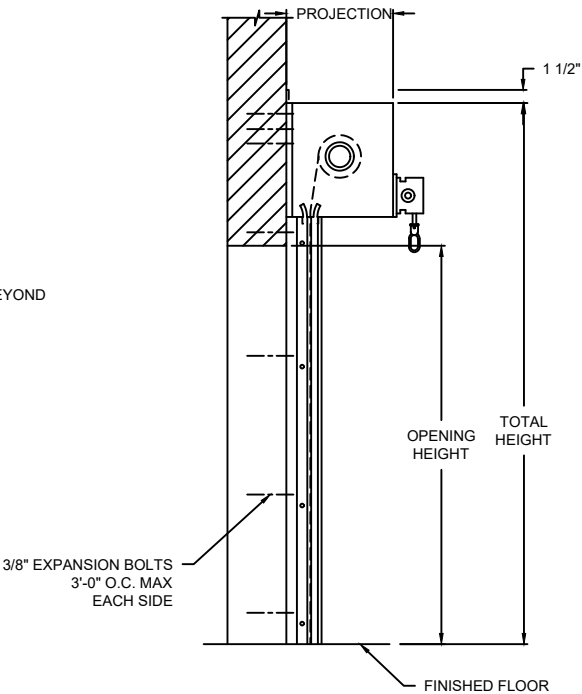

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	CRANK RH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		


SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS


- ☐ ANGLED E
☐ ANGLED Z
☐ EXTRUDED E
☐ EXTRUDED Z
☐ HIGH USAGE E
☐ HIGH USAGE Z

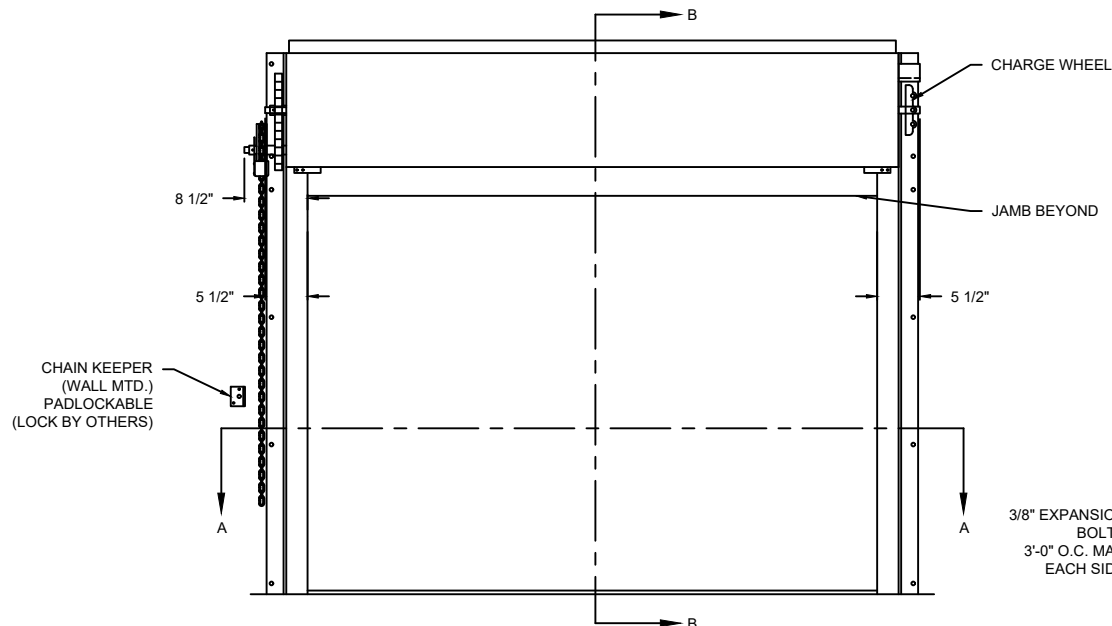

ELEVATION



SECTION A-A

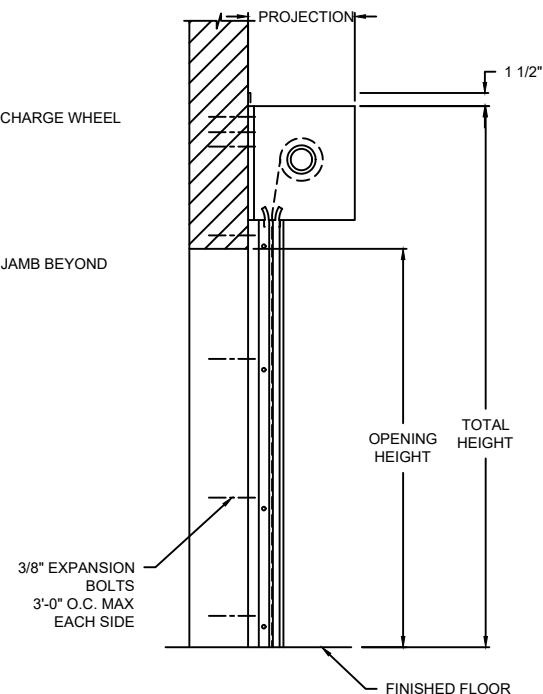

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT

COMPONENT

MATERIAL

OPERATION

NOTES:

CURTAIN

ALUMINUM

GUIDES

EXTRUDED ALUMINUM

BOTTOM BAR

EXTRUDED ALUMINUM

CHAIN
HOIST LH

- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101


DWG. NO.

DATE:


SHEET

BY:


Wayne Dalton



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS


- ☐ ANGLED E
☐ ANGLED Z
☐ EXTRUDED E
☐ EXTRUDED Z
☐ HIGH USAGE E
☐ HIGH USAGE Z

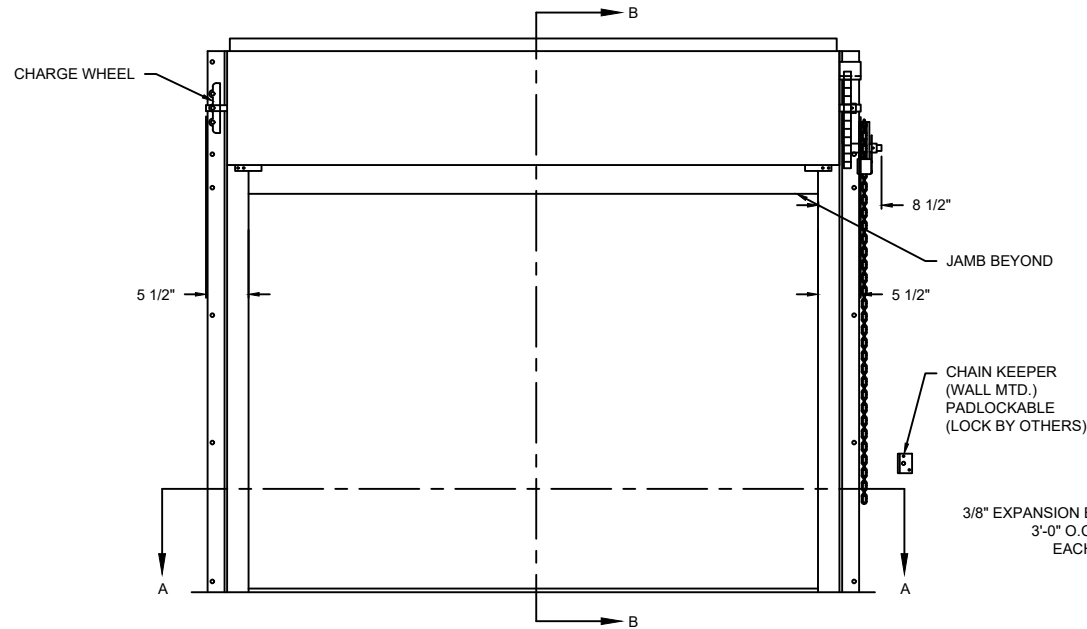

ELEVATION



SECTION A-A

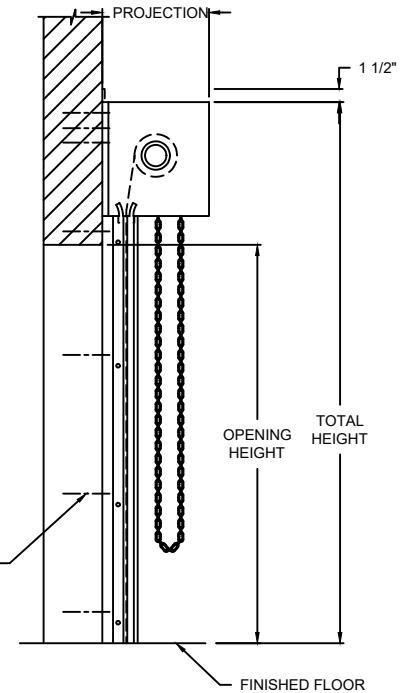

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT

COMPONENT

MATERIAL

OPERATION

NOTES:

CURTAIN

ALUMINUM

GUIDES

EXTRUDED ALUMINUM

BOTTOM BAR

EXTRUDED ALUMINUM

CHAIN
HOIST RH

- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101


DWG. NO.

DATE:


SHEET

BY:


Wayne Dalton



STRAIGHT LATTICE SLAT DETAIL




STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL


OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
SLAT OPTIONS	☐ STRAIGHT ☐ STAGGERED BRICK ☐ POLYCARBONATE
HOOD OPTIONS	☐ OFF ☐ ON (OCTAGON) ☐ ON (ROUND) ☐ HOOD SUPPORT
GUIDE OPTIONS	☐ ANGLED E ☐ ANGLED Z ☐ EXTRUDED E ☐ EXTRUDED Z ☐ HIGH USAGE E ☐ HIGH USAGE Z

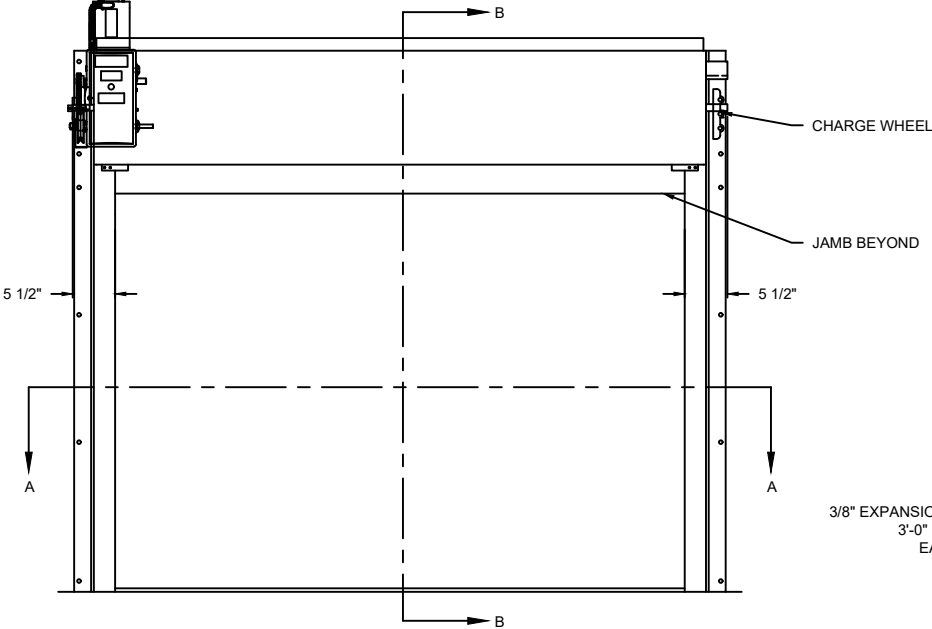

ELEVATION



SECTION A-A

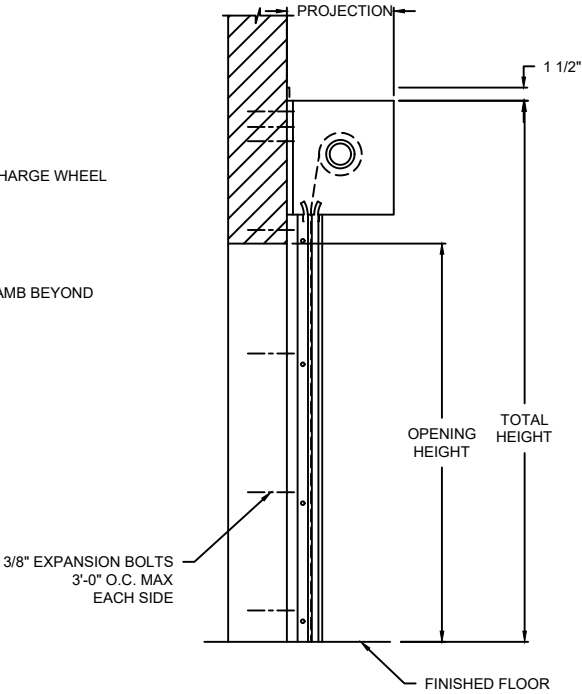

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
CURTAIN	ALUMINUM	RHX FOH LH	- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101
GUIDES	EXTRUDED ALUMINUM		
BOTTOM BAR	EXTRUDED ALUMINUM		


SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT


DWG. NO.	DATE:	
SHEET	BY:	



STRAIGHT LATTICE SLAT DETAIL



STAGGERED BRICK SLAT DETAIL



STRAIGHT WITH POLYCARBONATE SLAT DETAIL

OPTIONS

OPENING WIDTH

OPENING HEIGHT

SLAT OPTIONS


- ☐ STRAIGHT
☐ STAGGERED BRICK
☐ POLYCARBONATE

HOOD OPTIONS

- ☐ OFF
☐ ON (OCTAGON)
☐ ON (ROUND)
☐ HOOD SUPPORT

GUIDE OPTIONS


- ☐ ANGLED E
☐ ANGLED Z
☐ EXTRUDED E
☐ EXTRUDED Z
☐ HIGH USAGE E
☐ HIGH USAGE Z

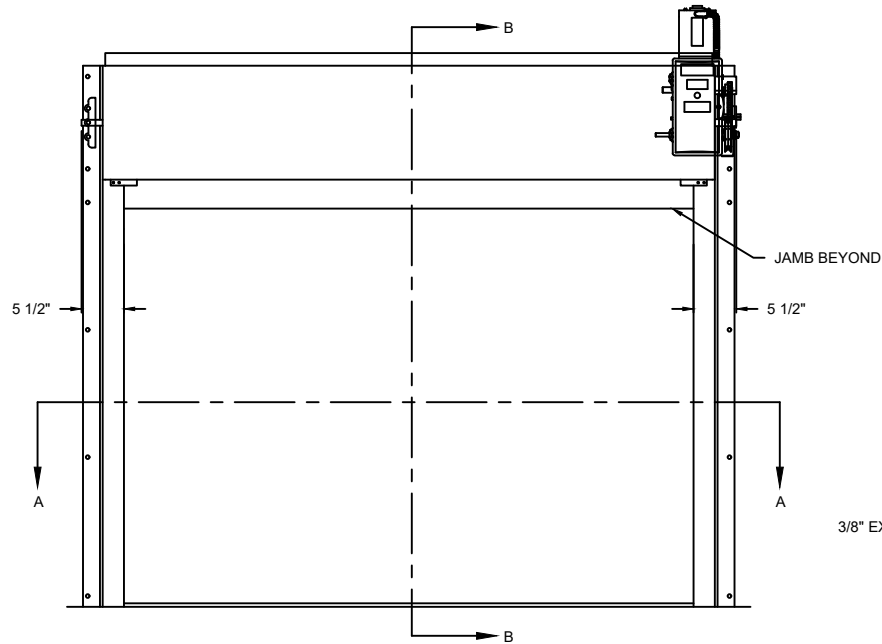

ELEVATION



SECTION A-A

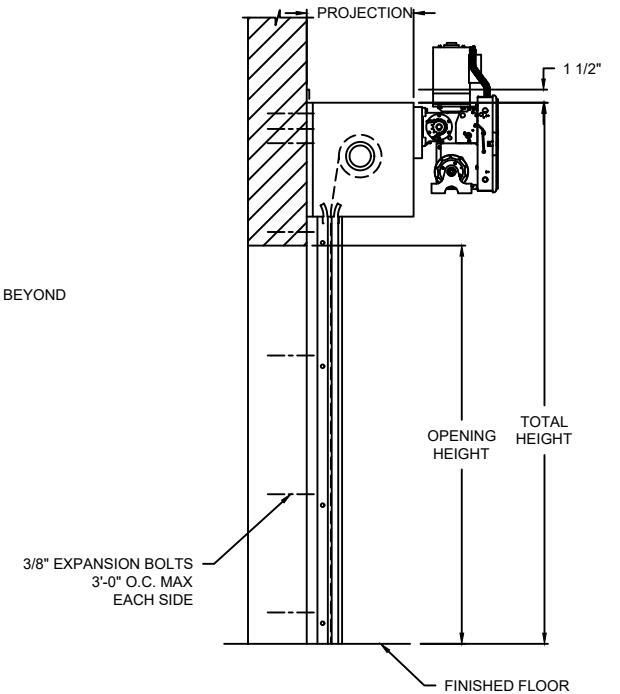

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

SECURITY GRILLES

600 UPWARD COILING SECURITY GRILLES - FACE MOUNT

COMPONENT

MATERIAL

OPERATION

NOTES:

CURTAIN

ALUMINUM

GUIDES

EXTRUDED ALUMINUM

BOTTOM BAR

EXTRUDED ALUMINUM

RHX FOH
LH

- ELECTRIC OPERATOR WITH AUTOMATIC EMERGENCY EGRESS; COMPLIANT WITH IBC 1008.1.4.4 & NFPA 101

DWG. NO.

DATE:

SHEET

BY:

Wayne Dalton