



BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HEADROOM OPTIONS (WIDTH X HEIGHT)	☐ 17 1/4"x13" (13" HEADPLATE) ☐ 20 1/4"x16" (17" HEADPLATE)
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING
HOOD OPTIONS	☐ SLOPED ☐ STANDARD

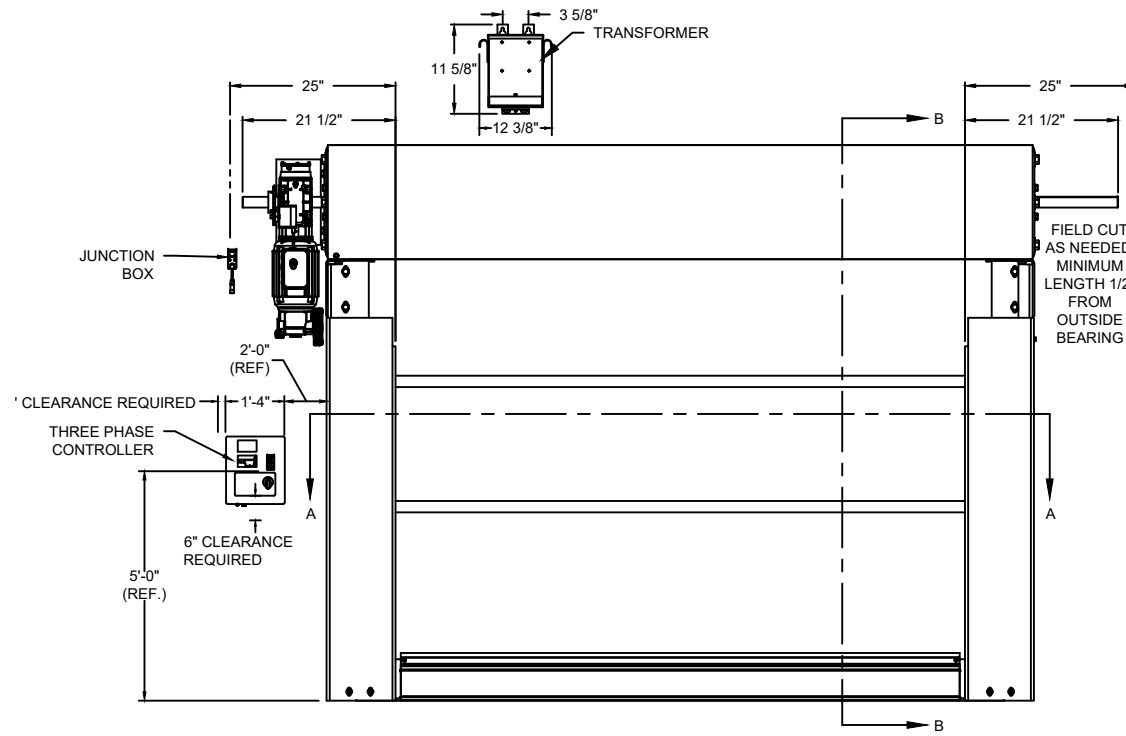


ELEVATION

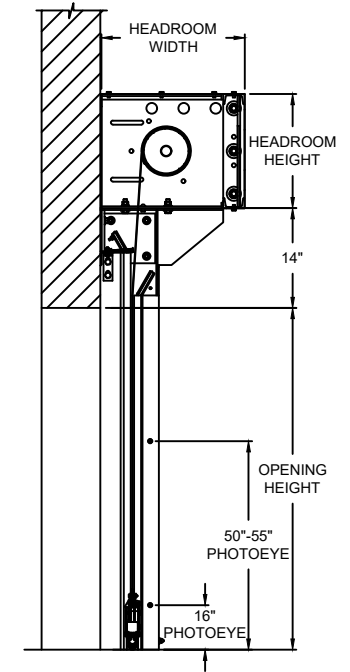

SECTION B-B

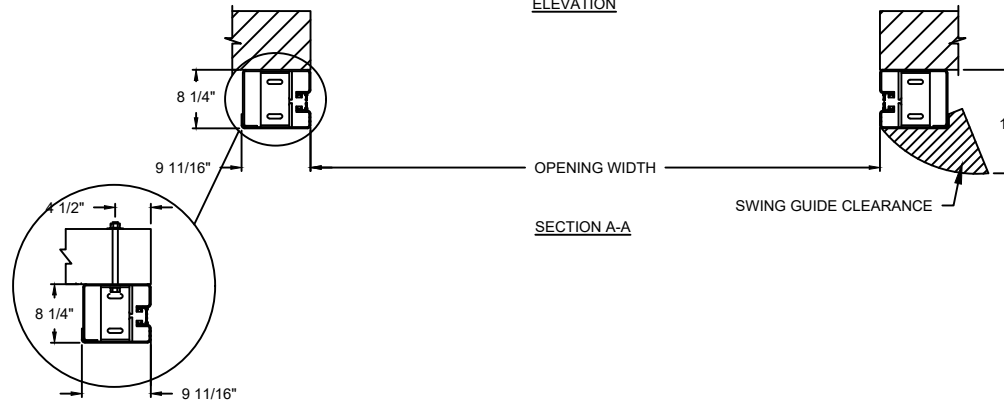

SECTION A-A



**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 208V 3-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 22 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
884	24'	20'

ADV-XTREME


884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
884	24'	20'




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HEADROOM OPTIONS (WIDTH X HEIGHT)	☐ 17 1/4"X13" (13" HEADPLATE)
	☐ 20 1/4"X16" (17" HEADPLATE)
HOUSING OPTIONS	☐ WITH MOTOR HOUSING
	☐ WITHOUT MOTOR HOUSING
HOOD OPTIONS	☐ SLOPED ☐ STANDARD

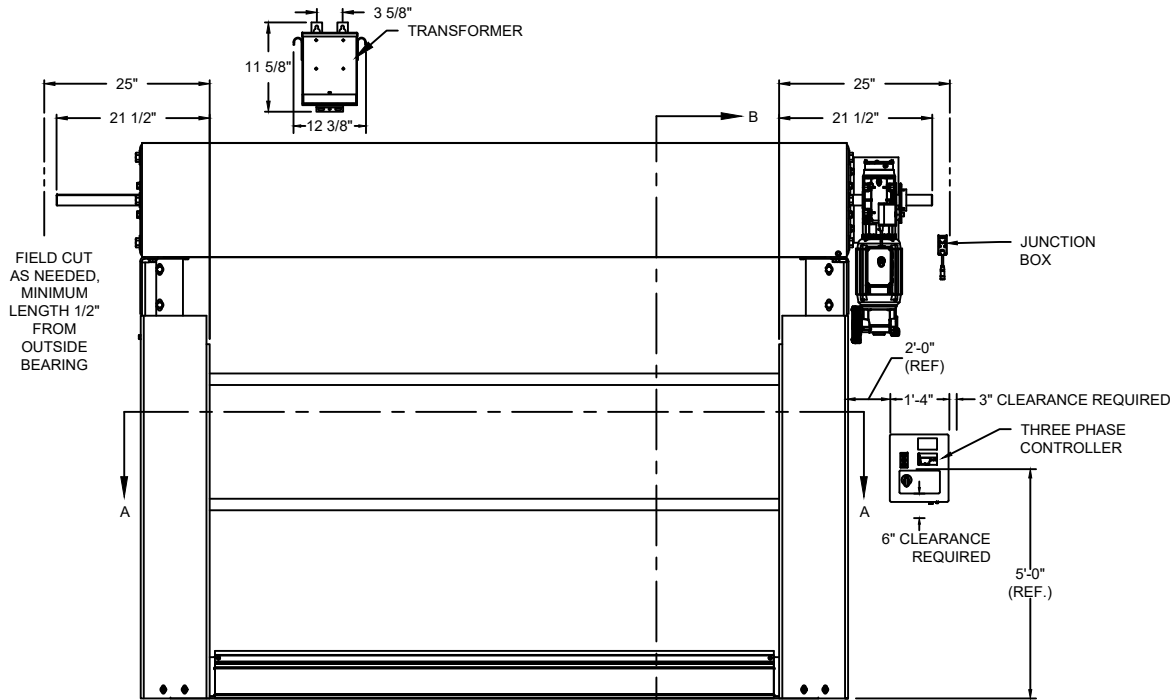


ELEVATION

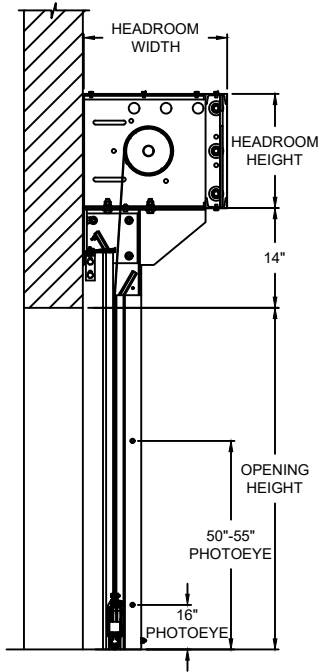

SECTION B-B

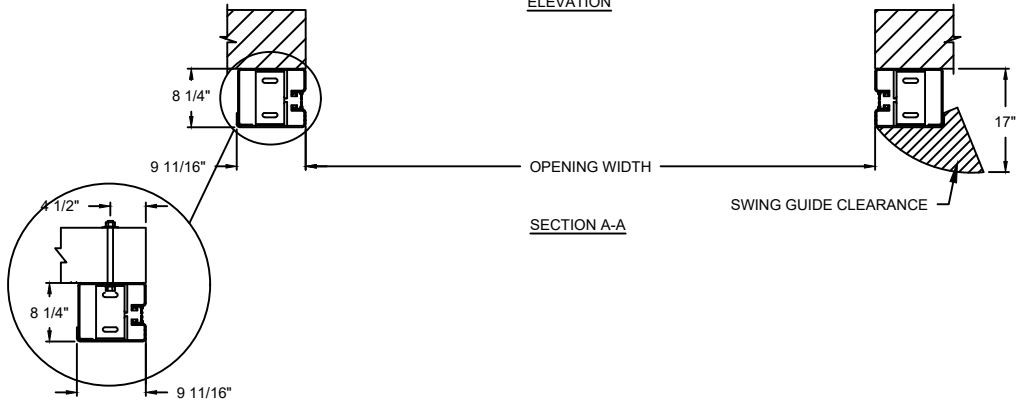

SECTION A-A




**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 208V 3-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 22 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


ADV-XTREME

884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 230V 3-PHASE ☐ 460V 3-PHASE
HEADROOM OPTIONS (WIDTH X HEIGHT)	☐ 17 1/4"x13" (13" HEADPLATE) ☐ 20 1/4"x16" (17" HEADPLATE)
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING
HOOD OPTIONS	☐ SLOPED ☐ STANDARD

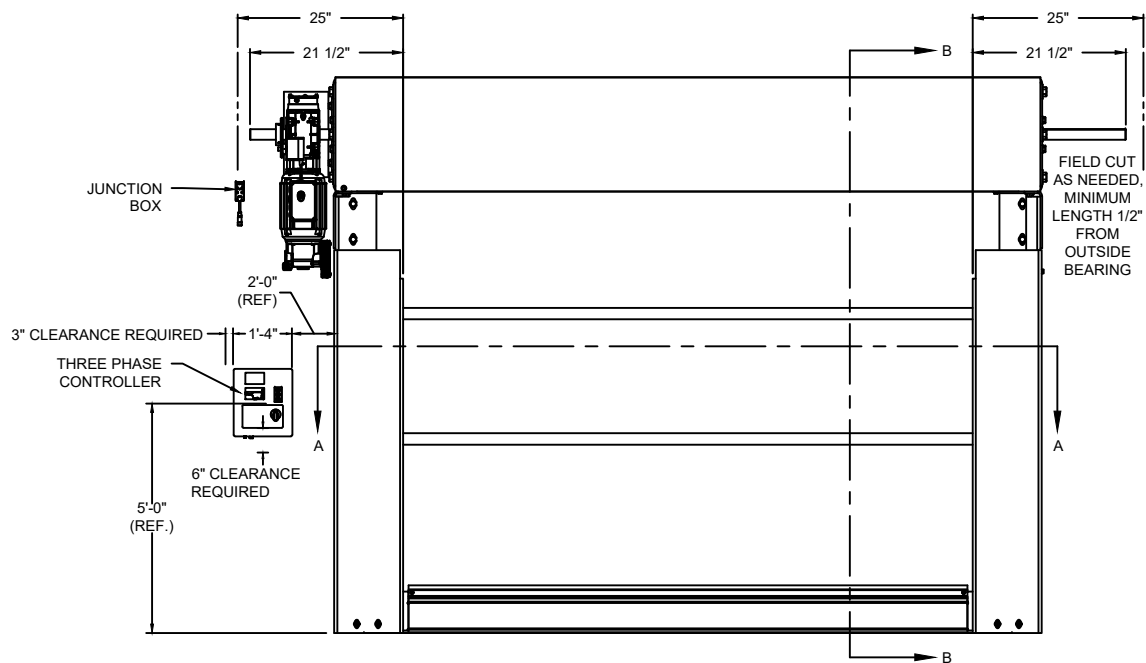

ELEVATION

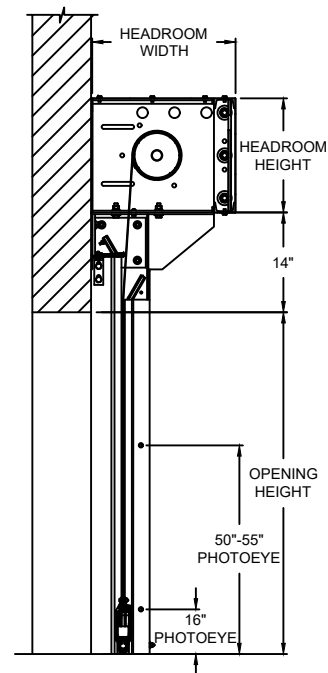

SECTION B-B

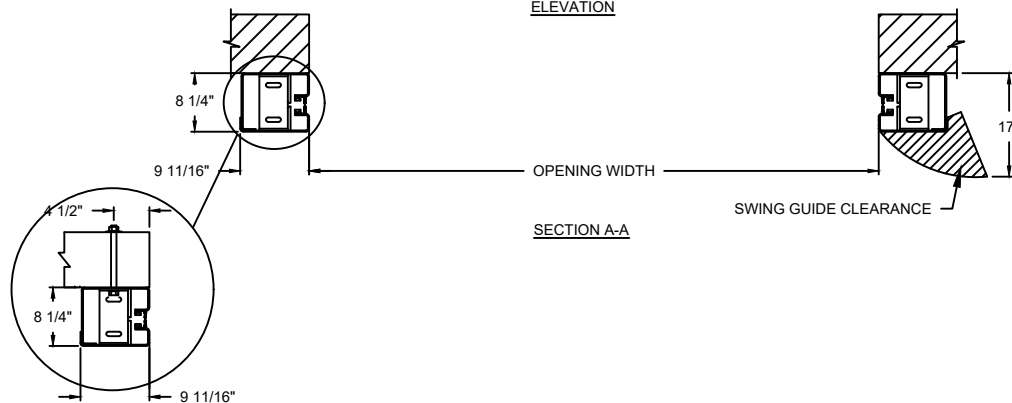

SECTION A-A

DETAIL
JAMB FASTENERS


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
884	24'	20'

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH	1. WINDLOAD 22 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


ADV-XTREME

884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 230V 3-PHASE ☐ 460V 3-PHASE
HEADROOM OPTIONS (WIDTH X HEIGHT)	☐ 17 1/4"x13" (13" HEADPLATE) ☐ 20 1/4"x16" (17" HEADPLATE)
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING
HOOD OPTIONS	☐ SLOPED ☐ STANDARD

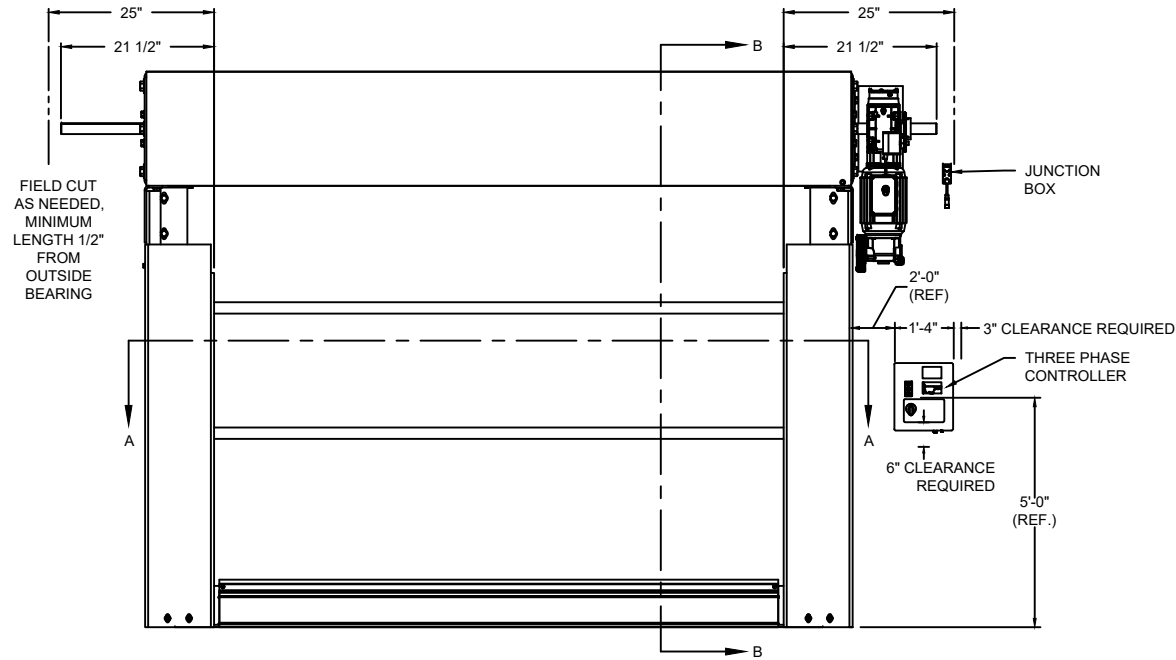


ELEVATION

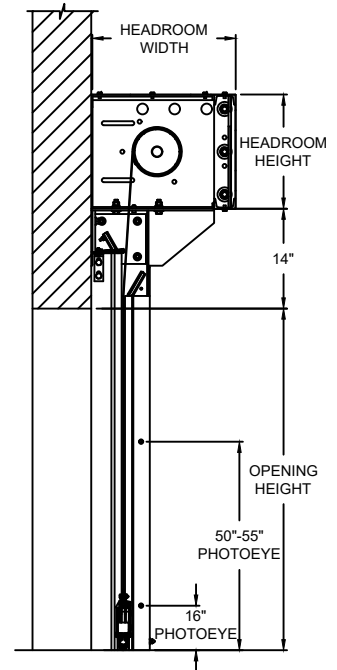

SECTION B-B

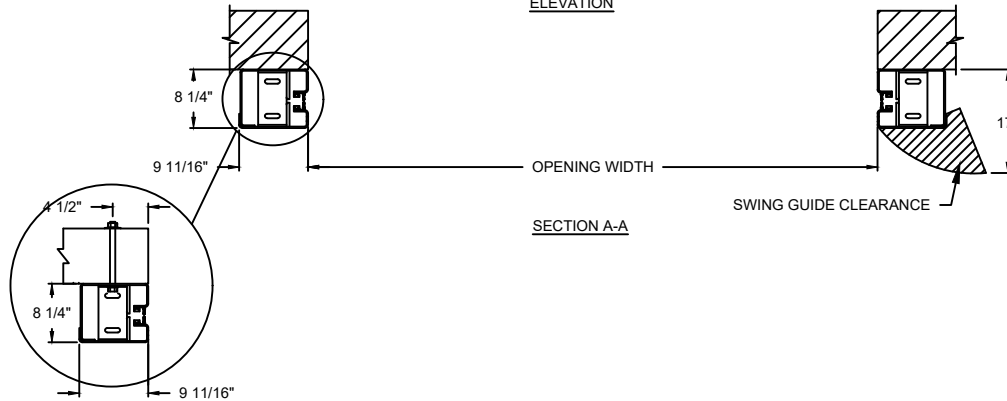

SECTION A-A



**DETAIL
JAMB FASTENERS**


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
884	24'	20'

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH	1. WINDLOAD 22 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


ADV-XTREME

884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HEADROOM OPTIONS (WIDTH X HEIGHT)	☐ 17 1/4"x13" (13" HEADPLATE) ☐ 20 1/4"x16" (17" HEADPLATE)
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING
HOOD OPTIONS	☐ SLOPED ☐ STANDARD

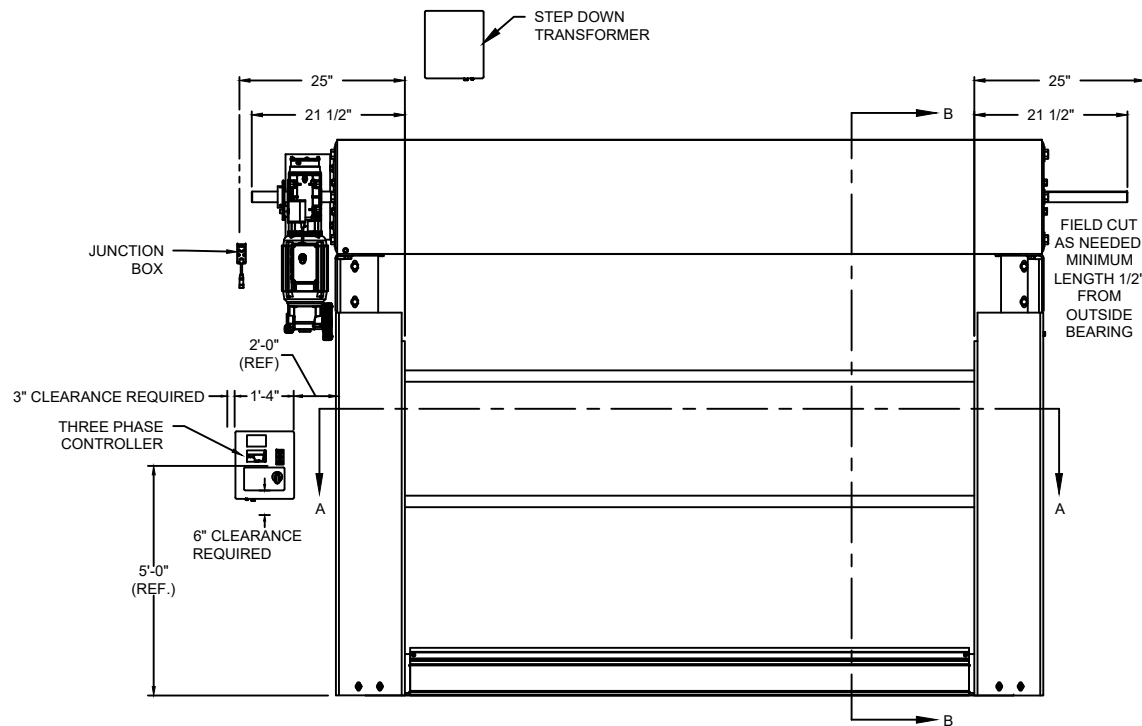

ELEVATION

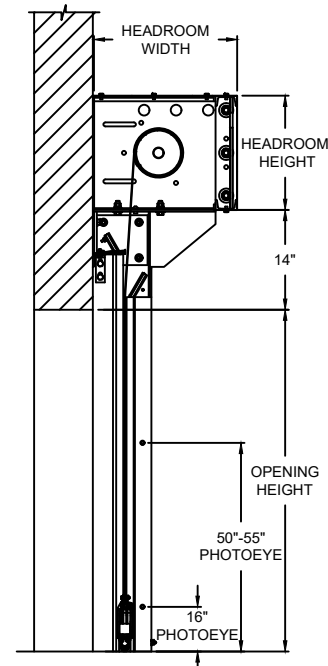

SECTION B-B

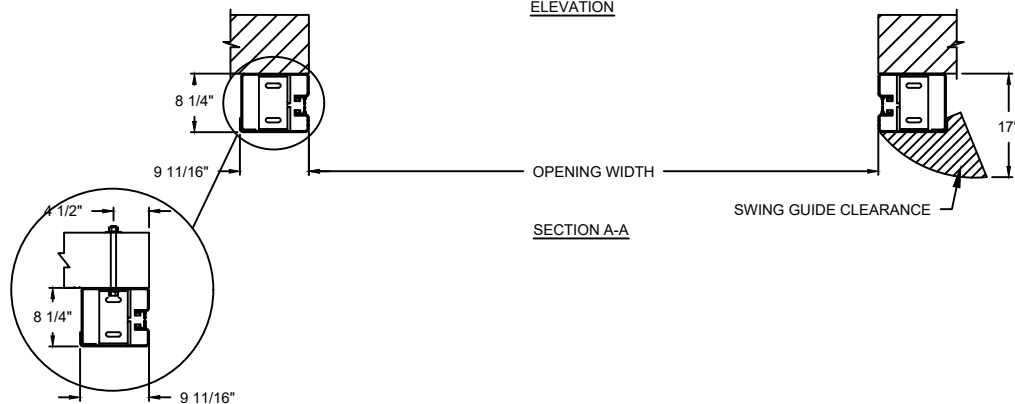

SECTION A-A

DETAIL
JAMB FASTENERS


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
884	24'	20'

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 575V 3-PHASE	1. WINDLOAD 22 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


ADV-XTREME

884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HEADROOM OPTIONS (WIDTH X HEIGHT)	☐ 17 1/4"x13" (13" HEADPLATE) ☐ 20 1/4"x16" (17" HEADPLATE)
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING
HOOD OPTIONS	☐ SLOPED ☐ STANDARD

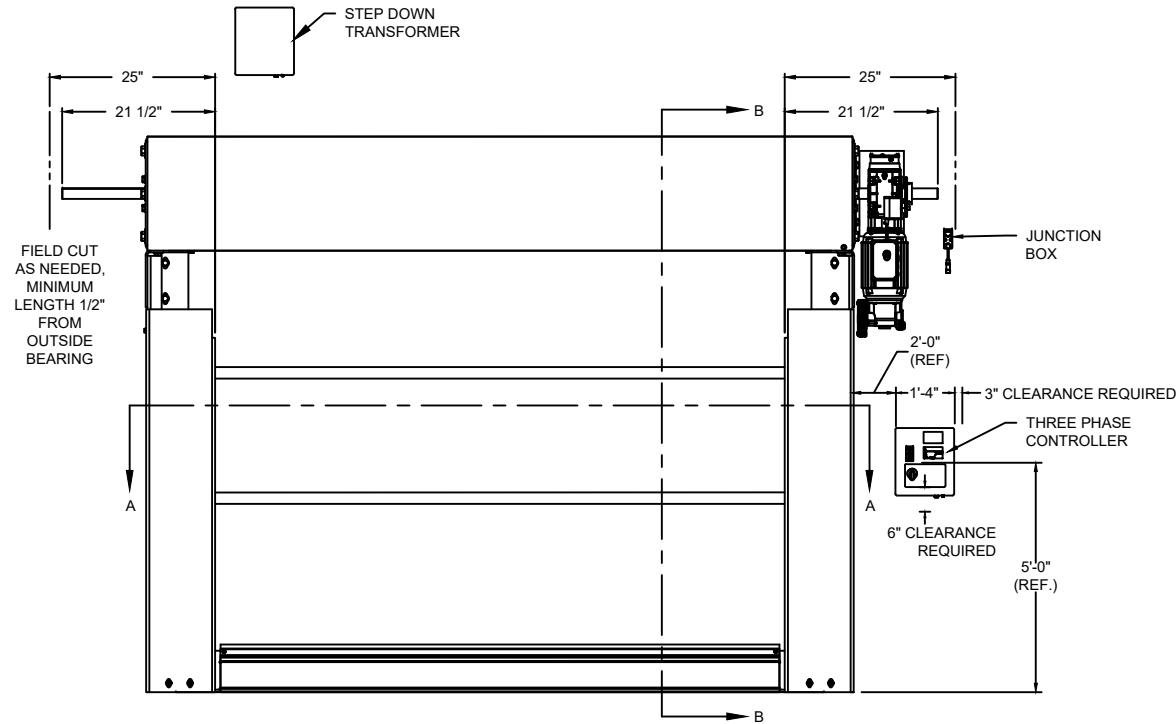

ELEVATION

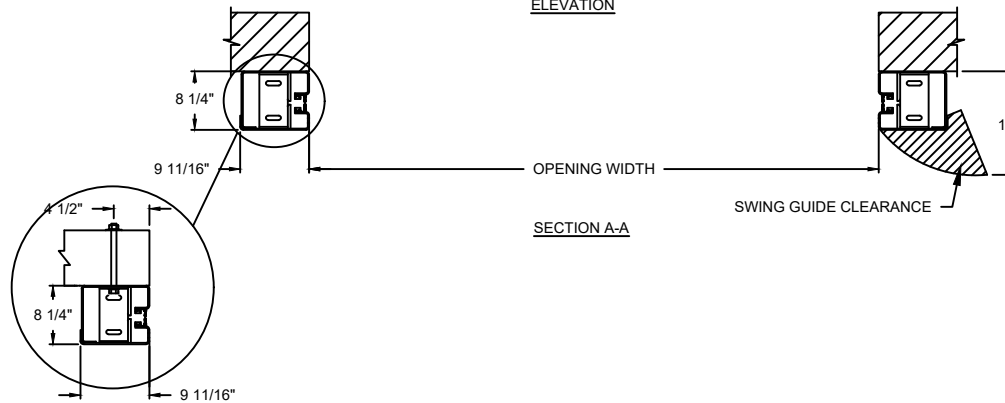

SECTION A-A

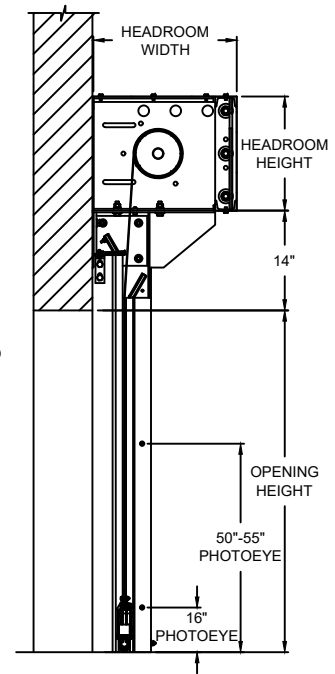

SECTION B-B

**DETAIL
JAMB FASTENERS**

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
884	24'	20'

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 575V 3-PHASE	1. WINDLOAD 22 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


ADV-XTREME

884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR


DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	

884 WALL GUIDE NO SPLICE											
BUILD HEIGHT (FT)	BUILD HEIGHT (IN)	WALL GUIDE HEIGHT (IN)	NUMBER OF SLOTS	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8
5	60	73.75	3	2.500	30.125	57.750					
5.5	66	79.75	3	2.500	33.125	63.750					
6	72	85.75	3	2.500	36.125	69.750					
6.5	78	91.75	4	2.500	21.125	39.750	75.750				
7	84	97.75	4	2.500	24.125	45.750	81.750				
7.5	90	103.75	4	2.500	27.125	51.750	87.750				
8	96	109.75	4	2.500	30.125	57.750	93.750				
8.5	102	115.75	4	2.500	33.125	63.750	99.750				
9	108	121.75	4	2.500	36.125	69.750	105.750				
9.5	114	127.75	5	2.500	21.125	39.750	75.750	111.750			
10	120	133.75	5	2.500	24.125	45.750	81.750	117.750			
10.5	126	139.75	5	2.500	27.125	51.750	87.750	123.750			
11	132	145.75	5	2.500	30.125	57.750	93.750	129.750			
11.5	138	151.75	5	2.500	33.125	63.750	99.750	135.750			
12	144	157.75	5	2.500	36.125	69.750	105.750	141.750			
12.5	150	163.75	6	2.500	21.125	39.750	75.750	111.750	147.750		
13	156	169.75	6	2.500	24.125	45.750	81.750	117.750	153.750		
13.5	162	175.75	6	2.500	27.125	51.750	87.750	123.750	159.750		
14	168	181.75	6	2.500	30.125	57.750	93.750	129.750	165.750		
14.5	174	187.75	6	2.500	33.125	63.750	99.750	135.750	171.750		
15	180	193.75	6	2.500	36.125	69.750	105.750	141.750	177.750		
15.5	186	199.75	7	2.500	21.125	39.750	75.750	111.750	147.750	183.750	
16	192	205.75	7	2.500	24.125	45.750	81.750	117.750	153.750	189.750	
16.5	198	211.75	7	2.500	27.125	51.750	87.750	123.750	159.750	195.750	
17	204	217.75	7	2.500	30.125	57.750	93.750	129.750	165.750	201.750	
17.5	210	223.75	7	2.500	33.125	63.75	99.75	135.75	171.75	207.75	
18	216	229.75	7	2.500	36.125	69.75	105.75	141.75	177.75	213.75	
18.5	222	235.75	8	2.500	21.125	39.75	75.75	111.75	147.75	183.75	219.75

884 WALL GUIDE SPLICE													
BUILD HEIGHT (FT)	BUILD HEIGHT (IN)	BOTTOM WALL GUIDE HEIGHT (IN)	TOP WALL GUIDE HEIGHT (IN)	NUMBER OF SLOTS	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8	SLOT 9
19	241.75	147.75	94	8	2.500	36.130	69.750	105.750	141.750	153.750	189.750	22.750	
19.5	247.75	153.75	94	9	2.500	21.130	39.750	75.750	111.750	147.750	159.750	195.750	231.750
20	253.75	159.75	94	9	2.500	24.130	45.750	81.750	117.750	153.750	165.750	201.750	237.750

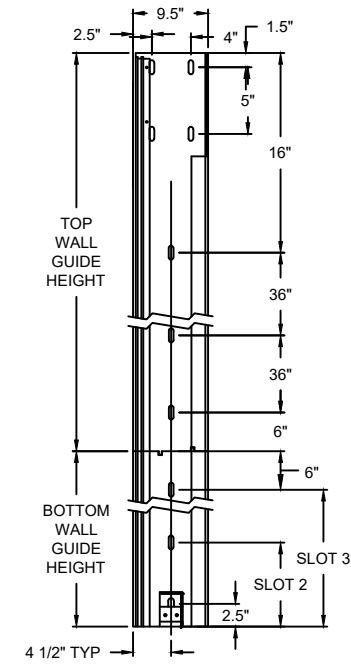

2 SPLICES JAMB DETAIL
SHOWING 6 SLOTS

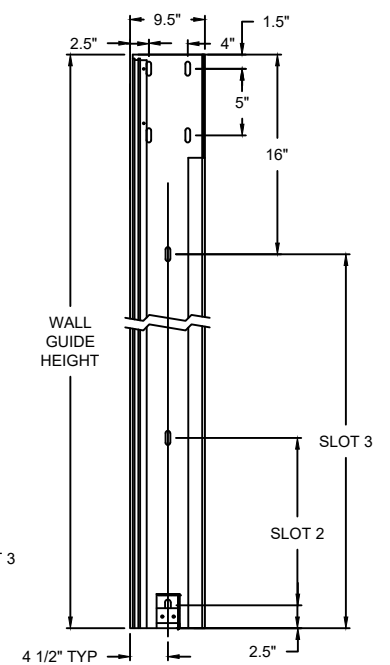

NO SPLICE JAMB DETAIL
SHOWING 3 SLOTS

STRUT QUANTITY WILL VARY
BASED ON DOOR HEIGHT

OPENING HEIGHT	# OF STRUTS
5'0" UP TO 8'0"	1
8'0" UP TO 11'6"	2
11'6" UP TO 15'6"	3
15'6" UP TO 19'0"	4
19'0" ABOVE	5

ADV-XTREME

884 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	