

☐ PERFORATED ☐ VISION

☐ WITH MOTOR HOUSING☐ WITHOUT MOTOR HOUSING

**OPTIONS** 


OPENING WIDTH\*

OPENING HEIGHT\*


SLAT OPTIONS

HOUSING OPTIONS



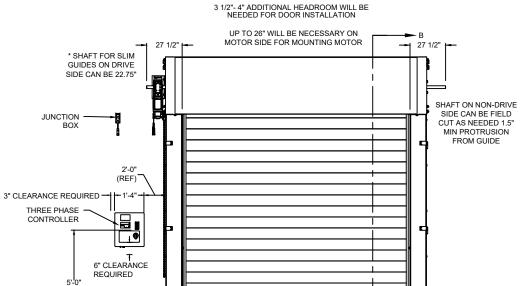

**ELEVATION** 

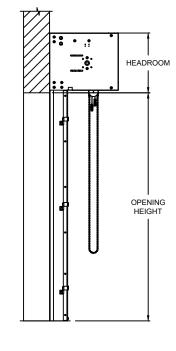

MODEL

888

STANDARD MAX. VALUES

WIDTH

HEIGHT

21'

SECTION B-B

9 1/2"	- OPENING WIDTI	HINGED GUIDE OPENING AREA
9 1/2"	SECTION A-A	26 3/4"

Q


- 1												
	COMPONENT	MATERIAL	OPERATION	NOTES:								
Г	HOOD	22 GA. STEEL		1. WINDLOAD 100 PSF ULTIMATE AT 15' WIDE								
Γ	CURTAIN	6063-T6 STRUCTURAL ALUMINUM		* PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS								
	GUIDES	HIGH STRENGTH STEEL	MOTOR LH	of Edition Hone								
Г	BOTTOM BAR	6063-T6 STRUCTURAL ALUMINUM										


DETAIL SLIM GUIDE

(REF.)

# **ADV-XTREME**


DWG. NO.	DATE:	Wayne
SHEET	BY:	Dalton.







OPENING WIDTH*	
OPENING HEIGHT*	
SLAT OPTIONS	☐ PERFORATED ☐ VISION
HOUSING OPTIONS	☐ WITH MOTOR HOUSING
	☐ WITHOUT MOTOR HOUSING

**OPTIONS** 



#### 3 1/2"- 4" ADDITIONAL HEADROOM WILL BE NEEDED FOR DOOR INSTALLATION

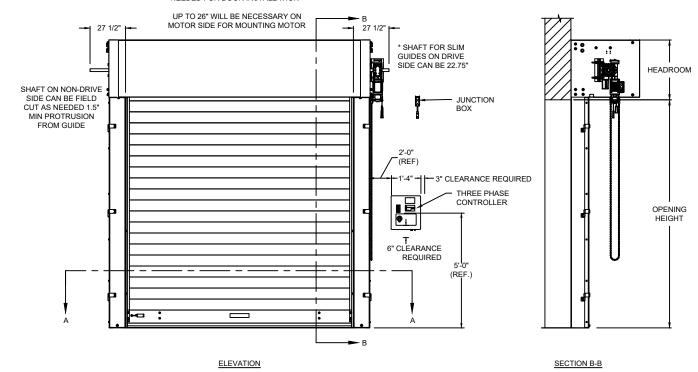


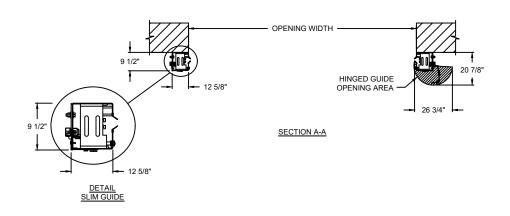


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL		1. WINDLOAD 100 PSF ULTIMATE AT 15' WIDE
CURTAIN	6063-T6 STRUCTURAL ALUMINUM	SLIM GUIDE	* PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
GUIDES	HIGH STRENGTH STEEL	MOTOR RH	of Edition Mone
BOTTOM BAR	6063-T6 STRUCTURAL ALUMINUM	1	

### **ADV-XTREME**

DWG. NO.	DATE:	Wayne
SHEET	BY:	<b>Dalton</b> .








**OPTIONS** 


OPENING WIDTH\* OPENING HEIGHT\* SLAT OPTIONS

HOUSING OPTIONS

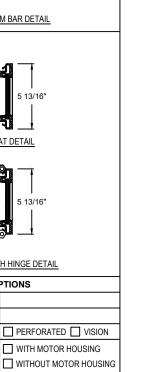




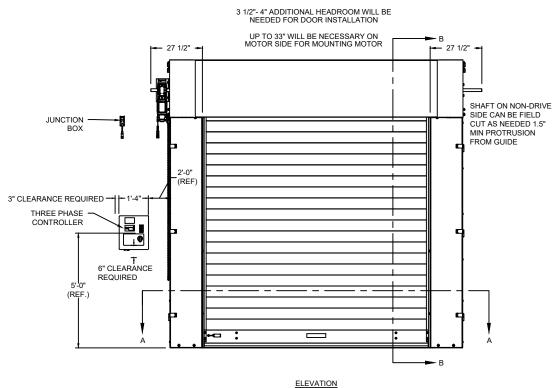

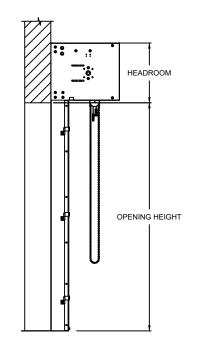


SECTION B-B

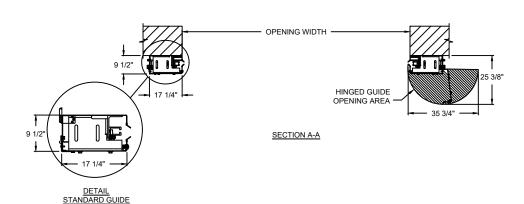


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL		1. WINDLOAD 100 PSF ULTIMATE AT 15' WIDE
CURTAIN	6063-T6 STRUCTURAL ALUMINUM	STANDARD GUIDE	* PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
GUIDES	HIGH STRENGTH STEEL	MOTOR LH	of Edition Money
BOTTOM BAR	6063-T6 STRUCTURAL ALUMINUM	1	


# **ADV-XTREME**


DWG. NO.	DATE:	Wayne
SHEET	BY:	<b>Dålton</b> .






OPTIONS												
OPENING WIDTH*												
OPENING HEIGHT*												
SLAT OPTIONS	☐ PERFORATED ☐ VISION											
HOUSING OPTIONS	☐ WITH MOTOR HOUSING											
	☐ WITHOUT MOTOR HOUSING											



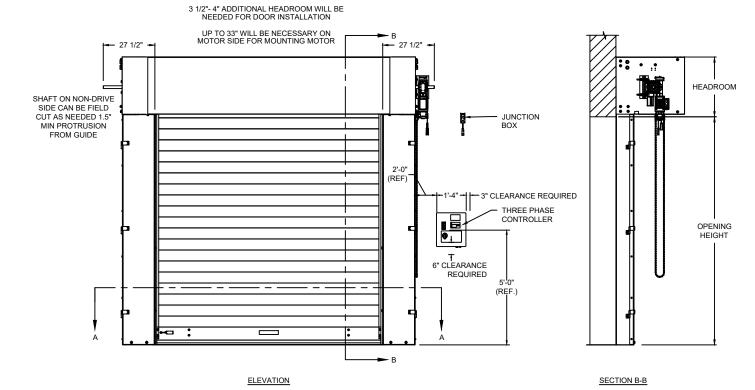

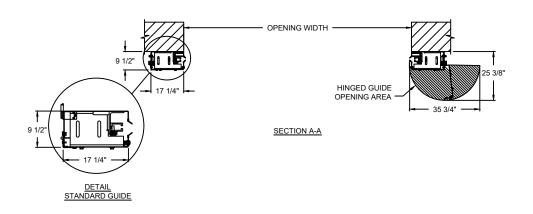

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL		1. WINDLOAD 100 PSF ULTIMATE AT 15' WIDE
CURTAIN	6063-T6 STRUCTURAL ALUMINUM	STANDARD GUIDE	* PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
GUIDES	HIGH STRENGTH STEEL	MOTOR RH	of Editional Controller
BOTTOM BAR	6063-T6 STRUCTURAL ALUMINUM	1	

# **ADV-XTREME**

DWG. NO.	DATE:	Wayne
SHEET	BY:	<b>Dalton</b> .

																389 WALL	SUIDE NO S	PLICE 8" O	.c.															
BUILD HEIGH	BUILD HEIGHT (IN)	STANDARD WALL GUIDE HEIGHT (IN)	LARGE WALL GUIDE HEIGHT (IN)	NUMBER OF SLOTS		SLOT2	SLOT 3	SLOT 4	SLOT5	SLOT 6	SLOT 7	SLOT8	SLOT9	SLOT 10	SLOT 11	SLOT 12	SLOT 13	5L0⊤14	SLOT 15	SLOT 16	SLO⊤17	SLO⊤18	SLO⊤19	SLOT 20	SLOT 21	SLOT 22	SLOT 23	SL0T24	SLOT 25	SLOT 26	\$L0⊤27	SLOT 28	SLOT 29	SLOT 30
BOILD HEIGH	60	91.5	(114)	12	3.0	11.00	19.00	27.00	35.00	43.00	50.75	58.50	64.50	68.88	83.63	88.00			_			_						_			_			-
5.5	66	97.5		13	3.0	11.00	19.00	27.00	35.00	43.00	51.00	57.75	64.50	70.50	74.88	89.63	94,00																	_
6	72	103.5		14	3.0	10.00	17.00	25.00	33.00	41.00	49.00	57.00	63.75	70.50	76.50	80.88	95.63	100.00																_
6.5	78	109.5		15	3.0	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	69.75	76.50	82.50	86.88	101.63	106.00															
7	84	115.5		16	3.0	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	75.75	82.50	88.50	92.88	107.63	112.00														
7.5	90	121.5		16	3.0	11.00	19.00	27.00	35.00	43.00	51.00	59.00	67.00	75.00	81.75	88.50	94.50	98.88	113,63	118.00														_
8	96	127.5		17	3.0	10.00	17.00	25.00	33.00	41.00	49.00	57.00	65.00	73.00	81.00	87.75	94.50	100.50	104.88	119.63	124.00													
8.5	102	133.5		18	3.0	9.00	15.00	23.00	31.00	39.00	47.00	55,00	63.00	71.00	79.00	87.00	93.75	100.50	106.50	110.88	125.63	130.00												
9	108	139.5		19	3.0	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	77.00	85.00	93.00	99.75	106.50	112.50	116.88	131.63	136.00											
9.5	114	145.5		19	3.0	11.00	19.00	27.00	35.00	43.00	51.00	59.00	67.00	75,00	83,00	91.00	99.00	105.75	112.50	118.50	122.88	137.63	142.00											
10	120	151.5		20	3.0	10.00	17.00	25.00	33.00	41.00	49.00	57,00	65.00	73,00	81,00	89.00	97.00	105.00	111.75	118.50	124.50	128.88	143.63	148,00										
10.5	126	157.5		21	3.0	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00	79.00	87.00	95.00	103.00	111.00	117.75	124.50	130.50	134.88	149.63	154.00									
11	132	163.5		22	3.0	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	77.00	85.00	93.00	101.00	109.00	117.00	123.75	130.50	136.50	140.88	155.63	160.00								
11.5	138	169.5		22	3.0	11.00	19.00	27.00	35.00	43.00	51.00	59.00	67.00	75.00	83.00	91.00	99.00	107.00	115.00	123.00	129.75	136.50	142.50	146.88	161.63	166.00								
12	144	175.5		23	3.0	10.00	17.00	25.00	33.00	41.00	49.00	57.00	65.00	73.00	81.00	89.00	97.00	105.00	113.00	121.00	129.00	135.75	142.50	148.50	152.88	167.63	172.00							
12.5	150	181.5		24	3.0	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00	79.00	87.00	95.00	103.00	111.00	119.00	127.00	135.00	141.75	148.50	154.50	158.88	173.63	178.00						
13	156	187.5		25	3.0	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	77.00	85.00	93.00	101.00	109.00	117.00	125.00	133.00	141.00	147.75	154.50	160.50	164.88	179.63	184.00					
13.5	162	193.5		25	3.0	11.00	19.00	27.00	35.00	43.00	51.00	59.00	67.00	75.00	83.00	91.00	99.00	107.00	115.00	123.00	131.00	139.00	147.00	153.75	160.50	166.50	170.88	185.63	190.00					
14	168	199.5		26	3.0	10.00	17.00	25.00	33.00	41.00	49.00	57.00	65.00	73.00	81.00	89.00	97.00	105.00	113.00	121.00	129.00	137.00	145.00	153.00	159.75	166.50	172.50	176.88	191.63	196.00				
14.5	174	205.5		27	3.0	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00	79.00	87.00	95.00	103.00	111.00	119.00	127.00	135.00	143.00	151.00	159.00	165.75	172.50	178.50	182.88	197.63	202.00			
15	180	211.5		28	3.0	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	77.00	85.00	93.00	101.00	109.00	117.00	125.00	133.00	141.00	149.00	157.00	165.00	171.50	178.50	184.50	188.88	203.63	208.00		
15.5	186		223.5	28	3.0	11.00	19.00	27.00	35.00	43.00	51.00	59.00	67.00	75.00	83.00	91.00	99.00	107.00	115.00	123.00	131.00	139.00	147.00	155.00	163.00	171.00	177.75	184.50	190.50	194.88	215.63	220.00		
16	192		229.5	29	3.0	10.00	17.00	25.00	33.00	41.00	49.00	57.00	65.00	73.00	81.00	89.00	97.00	105.00	113.00	121.00	129.00	137.00	145.00	153.00	161.00	169.00	177.00	183.75	190.50	196.50	200.88	221.63	226.00	
16.5	198		235.5	30	3.0	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00	79.00	87.00	95.00	103.00	111.00	119.00	127.00	135.00	143.00	151.00	159.00	167.00	175.00	183.00	189.75	196.50	202.50	206.88	227.63	232.00


_																																									
																				819.V	YALL GUIDE	SPLICE B" O.	C																		
		BOTTOM	TOP																																						
BUILD	BUILD	WALL	WALL																																						1 1
HEIGHT	HEIGHT	GUIDE	GUIDE	OFFICE	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8	SLOT 9	SLOT 10	SLOT 11	SLOT 12	SLOT 18	SLOT 14	SLOT 15	SLOT 16	SLOT 17	SLOT18	SLOT 19	SLOT 20	SLOT 21	SLOT 22	SLOT 28	SLOT 24	SLOT 25	SLOT 26	SLOT 27	SLOT 28	SLOT 29	SLOT 30	SLOT 31	SLOT 32	SLOT 33	SLOT 34	SLOT 35	SLOT 36	SLOT 37
(FT)	(IN)	HEIGHT	HEIGHT	OF 80018																																					1 1
		(IN)	(IN)																																						
17	204	122	119.5	31	3.00	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00			95.00	103.00	111.00	119.00	125.00	133.00	141.00	149.00	157.00	165.00	173.00	181.03		155.75	202.50	208.50	212.88	233.63	238.00						
17.5	210	128	119.5	32	3.00	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	77.00	85.00	93.00	101.00	109.00	117.00	125.00	131.00	139.00	147.00	155.00	163.00	171.00	179.00	187.00	195.00	201.75	208.50	214.50	218.88	239.63	244.00					1
18	216	134	119.5	32	3.00	11.00	19.00	27.00	35.00	48.00	51.00	59.00	67.00	75.00	83.00	91.00	99.00	107.00	115.00	123.00	131.00	137.00	145.00	153.00	161.00	169.00	177.00	185.00	193.00	201.00	207.75	214.50	220.50	224.88	245.63	250.00					
18.5	222	140	119.5	33	3.00	10.00	17.00	25.00	33.00	41.00	49.00	57.00	65.00	73.00	81.00	89.00	97.00	105.00	113.00	121.00	129.00	137.00	143.00	151.00	159.00	167.00	175.00	193.00	191.00	199.00	207.00	213.75	220.50	226.50	230.88	251.63	256.00				
19	228	146	119.5	34	3.00	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00	79.00	87.00	95.00	103.00	111.00	119.00	127.00	135.00	143.00	149.00	157.00	165.00	173.00	181.03	189.00	197.00	205.00	213.00	219.75	226.50	232.50	236.88	257.63	262.03			
19.5	234	152	119.5	35	3.00	8.00	13.00	21.00	29.00	37.00	45.00	53.00	61.00	69.00	77.00	85.00	93.00	101.00	109.00	117.00	125.00	133.00	141.00	149.00	155.00	163.00	171.00	179.00	187.00	195.00	203.00	211.00	219.00	225.75	232.50	238.50	242.88	263.63	268.00		
20	240	158	119.5	35	3.00	11.00	19.00	27.00	35.00	42.00	51.00	59.00	67.00	75.00	83.00	91.00	39.00	107.00	115.00	123.00	131.00	139.00	147.00	155.00	161.00	169.00	177.00	195.00	193.00	201.00	209.00	217.00	225.00	231.75	238.50	244.50	249.98	269.63	274.00		
20.5	246	164	119.5	96	3.00	10.00	17.00	25.00	33.00	41.00	49.00	57.00	65.00	73.00	81.00	89.00	97.00	105.00	113.00	121.00	129.00	197.00	145.00	153.00	161.00	167.00	175.00	183.00	191.00	159.00	207.00	215.00	223.00	231.00	237.75	244.50	250.50	254.88	275.63	280.00	
21	252	170	119.5	37	3.00	9.00	15.00	23.00	31.00	39.00	47.00	55.00	63.00	71.00	79.00	87.00	95.00	103.00	111.00	119.00	127.00	135.00	143.00	151.00	159.00	167.00	173.00	181.03	189.00	197.00	205.00	213.00	221.03	229.00	237.00	243.75	250.50	256.50	260.88	281.63	286.00

#### 8" SPACING IS USED FOR CONCRETE/MASONRY JAMBS WITH Z-GUIDES. GROUT-FILLED OR SOLID CMU BLOCK JAMBS - ALL-THREADED THRU-RODS WITH 3" WASHERS ARE TO BE USED. ALL-THREAD ROD IS PLACED IN EVERY SINGLE SLOT, RESULTING IN 8" SPACING.

									88	89 WALL GI	JIDE NO SP	LICE 16" O	C.										
	BUILD HEIGHT (IN)	STANDARD WALL GUIDE HEIGHT (IN)	LARGE WALL GUIDE HEIGHT (IN)	NUMBER OF SLOTS	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8	SLOT 9	SLOT 10	SLOT 11	SLOT 12	SLOT13	SLOT 14	SLOT 15	SLOT 16	SLOT 17	SLOT 18	SLOT 19
BUILD HEIGHT	60	91.5	(IN)		3.0	15.00	27.00	43.00	50.75	58.50	64.50	68.88	83.63	88.00									
5.5	66	97.5		10	3.0	19.00	35.00	43.00 51.00	57.75	64.50	70.50	74.88	89.63	94.00								_	
6	72	103.5		11	3.0	14.00	25.00	41.00	57.00	63.75	70.50	76.50	80.88	95.63	100.00	_							-
6.5	78	103.5		11	3.0	17.00	31.00	47.00	63.00	69.75	76.50	82.50	86.88	101.63	106.00								_
7	84	115.5		12	3.0	12.00	21.00	37.00	53.00	69.00	75.75	82.50	88.50	92.88	107.63	112.00							-
7.5	90	121.5		12	3.0	15.00	27.00	43.00	59.00	75.00	81.75	88.50	94.50	98.88	113.63	118.00							
8	96	127.5		12	3.0	18.00	33.00	49.00	65.00	81.00	87.75	94.50	100.50	104.88	119.63	124.00							-
8.5	102	133.5		13	3.0	13.00	23.00	39.00	55.00	71.00	87.00	93.75	100.50	106.50	110.88	125.63	130.00						
9	108	139.5		13	3.0	16.00	29.00	45.00	61.00	77.00	93.00	99.75	106.50	112.50	116.88	131.63	136.00						
9.5	114	145.5		13	3.0	19.00	35.00	51.00	67.00	83.00	99.00	105.75	112.50	118.50	122.88	137.63	142.00						
10	120	151.5		14	3.0	14.00	25.00	41.00	57.00	73.00	89.00	105.00	111.75	118.50	124.50	128.88	143.63	148.00					
10.5	126	157.5		14	3.0	17.00	31.00	47.00	63.00	79.00	95.00	111.00	117.75	124.50	130.50	134.88	149.63	154.00					
11	132	163.5		15	3.0	12.00	21.00	37.00	53.00	69.00	85.00	101.00	117.00	123.75	130.50	136.50	140.88	155.63	160.00				
11.5	138	169.5		15	3.0	15.00	27.00	43.00	59.00	75.00	91.00	107.00	123.00	129.75	136.50	142.50	146.88	161.63	166.00				
12	144	175.5		15	3.0	18.00	33.00	49.00	65.00	81.00	97.00	113.00	129.00	135.75	142.50	148.50	152.88	167.63	172.00				
12.5	150	181.5		16	3.0	13.00	23.00	39.00	55.00	71.00	87.00	103.00	119.00	135.00	141.75	148.50	154.50	158.88	173.63	178.00			
13	156	187.5		16	3.0	16.00	29.00	45.00	61.00	77.00	93.00	109.00	125.00	141.00	147.75	154.50	160.50	164.88	179.63	184.00			
13.5	162	193.5		16	3.0	19.00	35.00	51.00	67.00	83.00	99.00	115.00	131.00	147.00	153.75	160.50	166.50	170.88	185.63	190.00			
14	168	199.5		17	3.0	14.00	25.00	41.00	57.00	73.00	89.00	105.00	121.00	137.00	153.00	159.75	166.50	172.50	176.88	191.63	196.00		
14.5	174	205.5		17	3.0	17.00	31.00	47.00	63.00	79.00	95.00	111.00	127.00	143.00	159.00	165.75	172.50	178.50	182.88	197.63	202.00		
15	180	211.5		18	3.0	12.00	21.00	37.00	53.00	69.00	85.00	101.00	117.00	133.00	149.00	165.00	171.75	178.50	184.50	188.88	203.63	208.00	
15.5	186		223.5	18	3.0	12.00	27.00	43.00	59.00	75.00	91.00	107.00	123.00	139.00	155.00	171.00	177.75	184.50	190.50	194.88	215.63	220.00	
16	192		229.5	19	3.0	7.00	17.00	33.00	49.00	65.00	81.00	97.00	113.00	129.00	145.00	161.00	177.00	183.75	190.50	196.50	200.88	221.63	226.00
16.5	198		235.5	19	3.0	16.00	29.00	45.00	61.00	77.00	93.00	109.00	125.00	141.00	157.00	173.00	189.00	195.75	202.50	208.50	212.88	227.63	232.00

	889 WALL GUIDE SPLICE 16" O.C.																											
		BOTTOM	TOP																									
BUILD	BUILD	WALL	WALL	NUMBER																								
HEIGHT	HEIGHT	GUIDE	GUIDE	OF SLOTS	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8	SLOT 9	SLOT 10	SLOT 11	SLOT 12	SLOT 13	SLOT 14	SLOT 15	SLOT 16	SLOT 17	SLO⊤18	SLOT 19	SLOT 20	SLOT 21	SLOT 22	SLOT 23	SLOT 24
(FT)	(IN)	HEIGHT	HEIGHT	UF 3LU13																								
		(IN)	(IN)																									
17	204	122	119.5	21	3.00	13.00	23.00	39.00	55.00	71.00	87.00	103.00	119.00	125.00	141.00	157.00	173.00	189.00	195.75	202.50	208.50	212.88	233.63	238.00				
17.5	210	128	119.5	21	3.00	16.00	29.00	45.00	61.00	77.00	93.00	109.00	125.00	131.00	147.00	163.00	179.00	195.00	201.75	208.50	214.50	218.88	239.63	244.00	244.00			
18	216	134	119.5	21	3.00	19.00	35.00	51.00	67.00	83.00	99.00	115.00	131.00	137.00	153.00	169.00	185.00	201.00	207.75	214.50	220.50	224.88	245.63	250.00	250.00			
18.5	222	140	119.5	22	3.00	14.00	25.00	41.00	57.00	73.00	89.00	105.00	121.00	137.00	143.00	159.00	175.00	191.00	207.00	213.75	220.50	226,50	230.88	251.63	256.00	256.00		
19	228	146	119.5	22	3.00	17.00	31.00	47.00	63.00	79.00	95.00	111.00	127.00	143.00	149.00	165.00	181.00	197.00	213.00	219.75	226.50	232.50	236.88	257.63	262.00	262.00		
19.5	234	152	119.5	23	3.00	12.00	21.00	37.00	53.00	69.00	85.00	101.00	117.00	133.00	149.00	155.00	171.00	187.00	203.00	219.00	225.75	232.50	238.50	242.88	263.63	268.00	268.00	
20	240	158	119.5	23	3.00	15.00	27.00	43.00	59.00	75.00	91.00	107.00	123.00	139.00	155.00	161.00	177.00	193.00	209.00	225.00	231.75	238.50	244.50	248.88	269.63	274.00	274.00	
20.5	246	164	119.5	23	3.00	18.00	33.00	49.00	65.00	81.00	97.00	113.00	129.00	145.00	161.00	167.00	183.00	199.00	215.00	231.00	237.75	244.50	250.50	254.88	275.63	280.00	280.00	
21	252	170	119.5	24	3.00	13.00	23.00	39.00	55.00	71.00	87.00	103.00	119.00	135.00	151.00	167.00	173.00	189.00	205.00	221.00	237.00	243.75	250.50	256.50	260.88	281.63	286.00	286.00

COLUMN OF SLOTS CLOSER TO THE OPENING (WITH 16" SPACING) IS USED ON STEEL JAMBS WITH PROVIDED BOLTS TO BE PLACED IN EVERY SINGLE SLOT. IT MAY ALSO BE PLUG-WELDED TO THE JAMB THROUGH THESE SLOTS. WITH E-GUIDE, IT IS

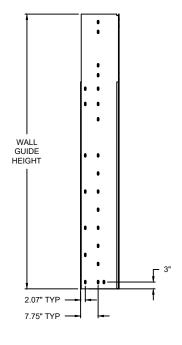

JAMB DETAIL

### **ADV-XTREME**

DWG. NO.	DATE:	Wayne
SHEET	BY:	<b>Dålton</b> .