



Z GUIDE DETAIL

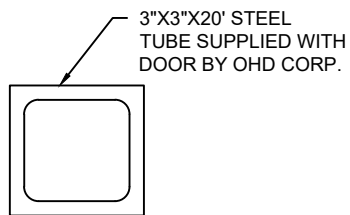


F TUBE DETAIL




#14 SLAT SECTION #BCO-3165 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

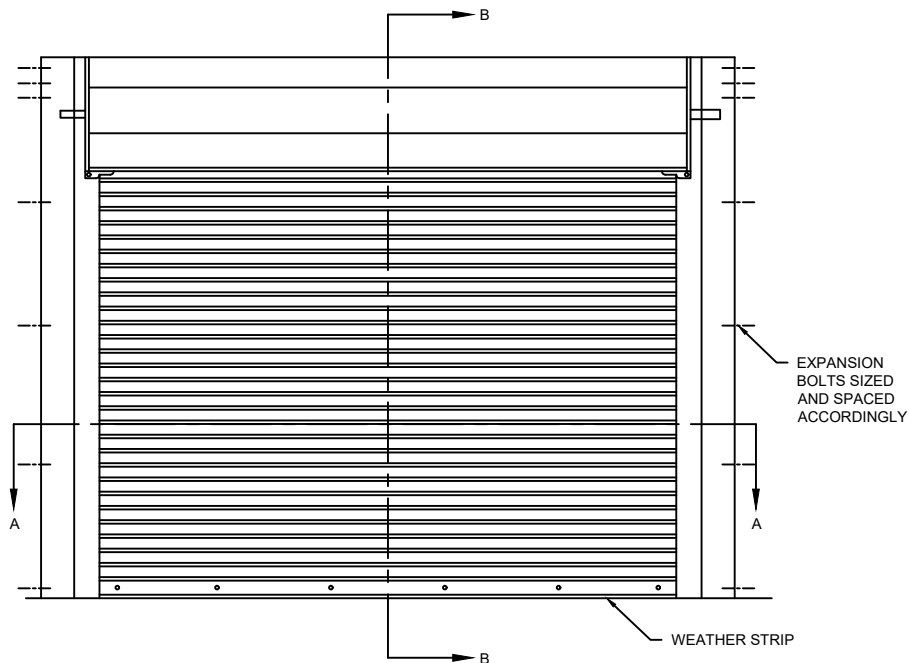


ELEVATION

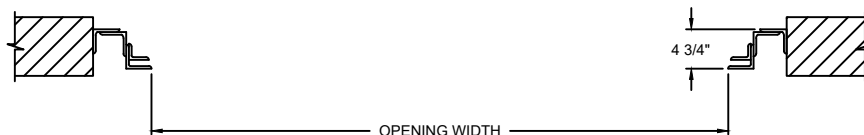

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'

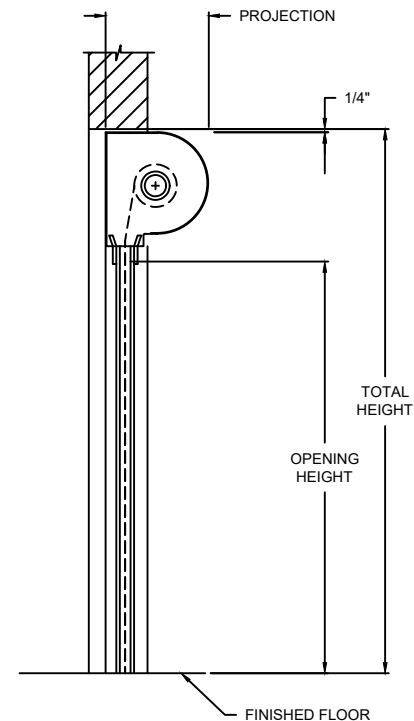

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

ROLLING SERVICE


800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MANUAL PUSH UP	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL

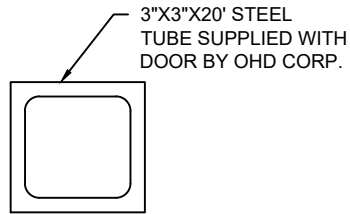


F TUBE DETAIL



#14 SLAT SECTION #BCO-3165 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

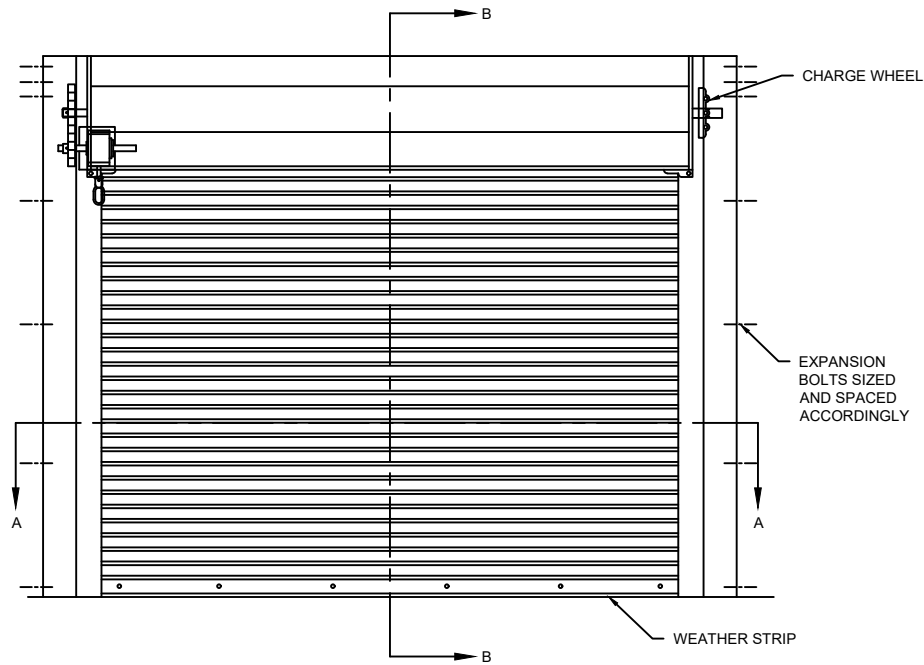


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'

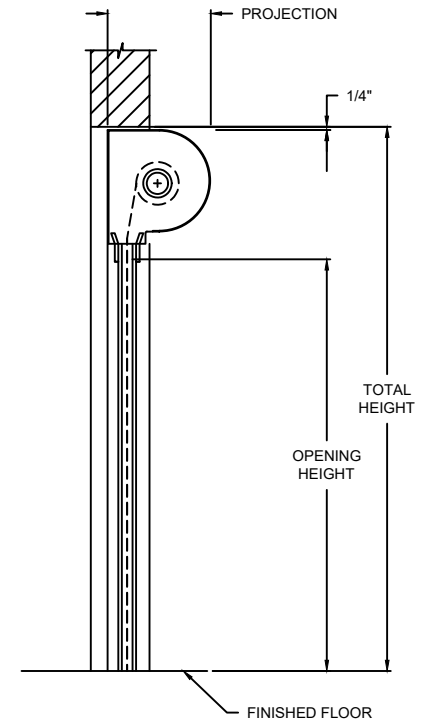

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

ROLLING SERVICE


800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CRANK LH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL




F TUBE DETAIL




#14 SLAT SECTION #BCO-3165 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

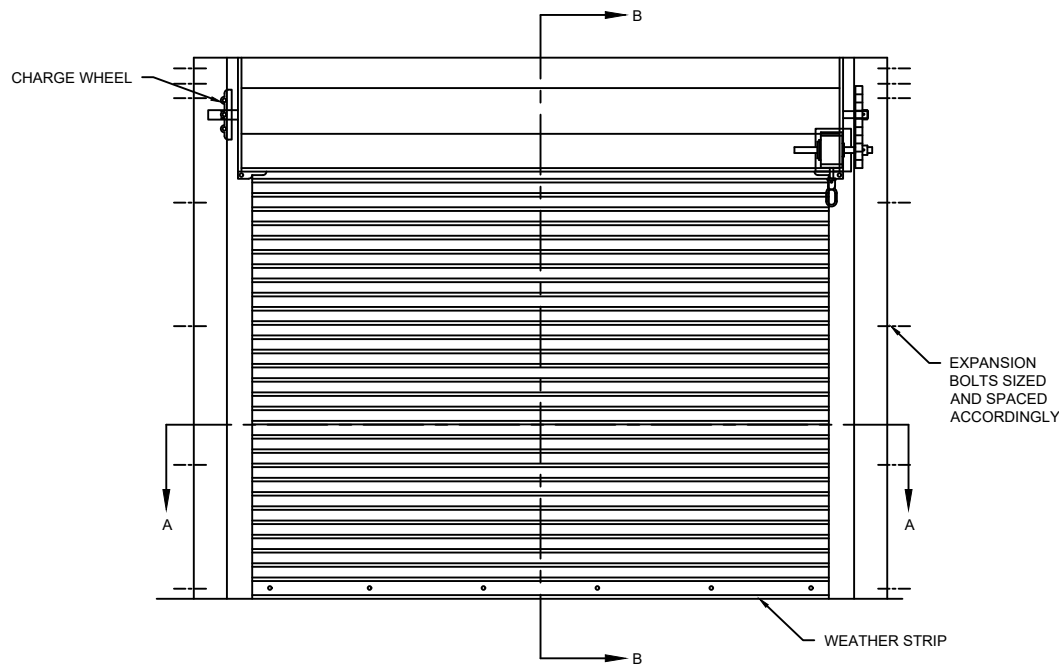


ELEVATION

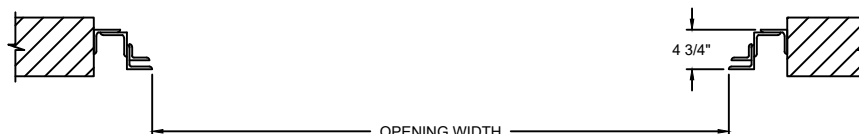

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'

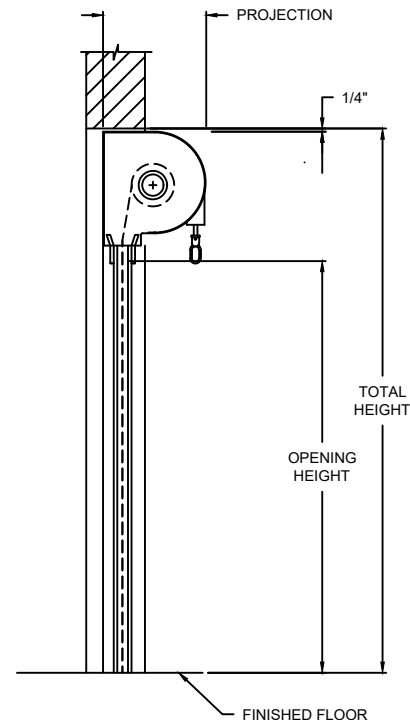

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

ROLLING SERVICE


800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CRANK RH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL



F TUBE DETAIL




#14 SLAT SECTION #BCO-3165 SLAT SECTION


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
CHAIN HOIST COVER	☐ WITH ☐ WITHOUT
SLAT OPTIONS	☐ C187 ☐ C275

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'

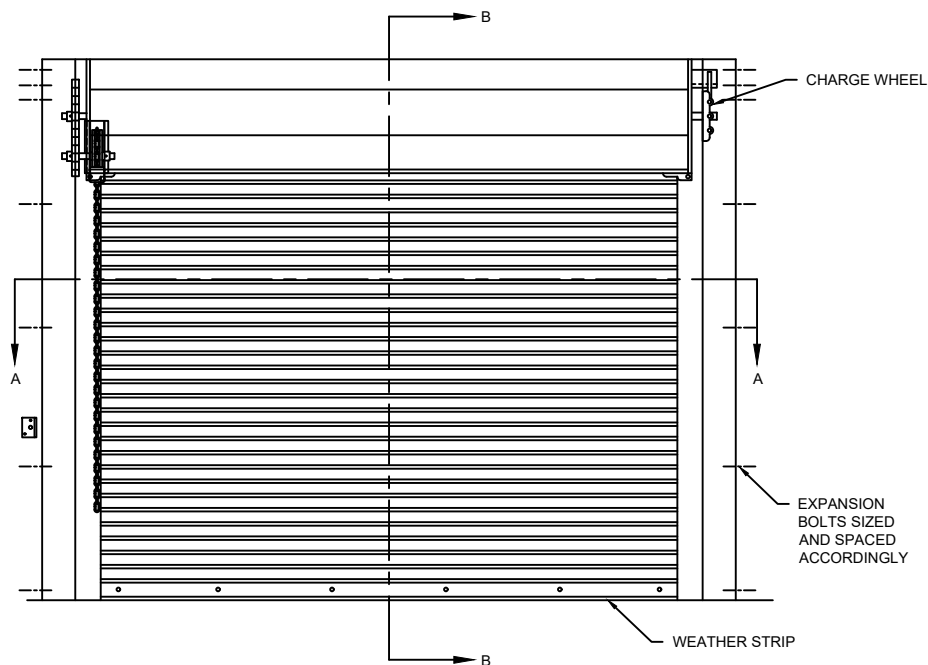


ELEVATION

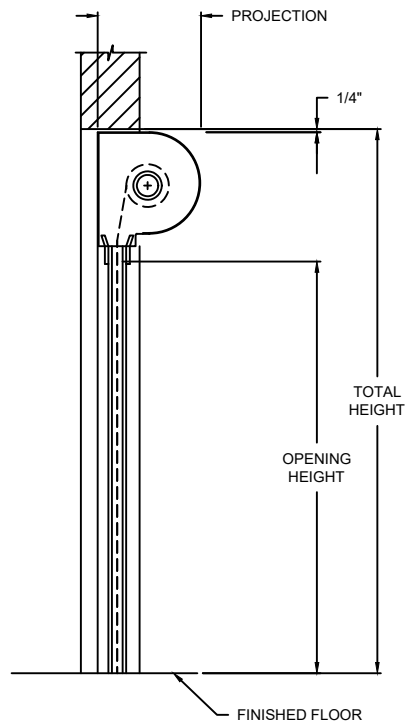

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

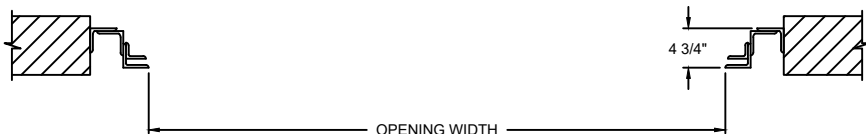


SECTION A-A

ROLLING SERVICE


800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CHAIN HOIST LH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL




F TUBE DETAIL



#14 SLAT SECTION #BCO-3165 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
CHAIN HOIST COVER	☐ WITH ☐ WITHOUT
SLAT OPTIONS	☐ C187 ☐ C275

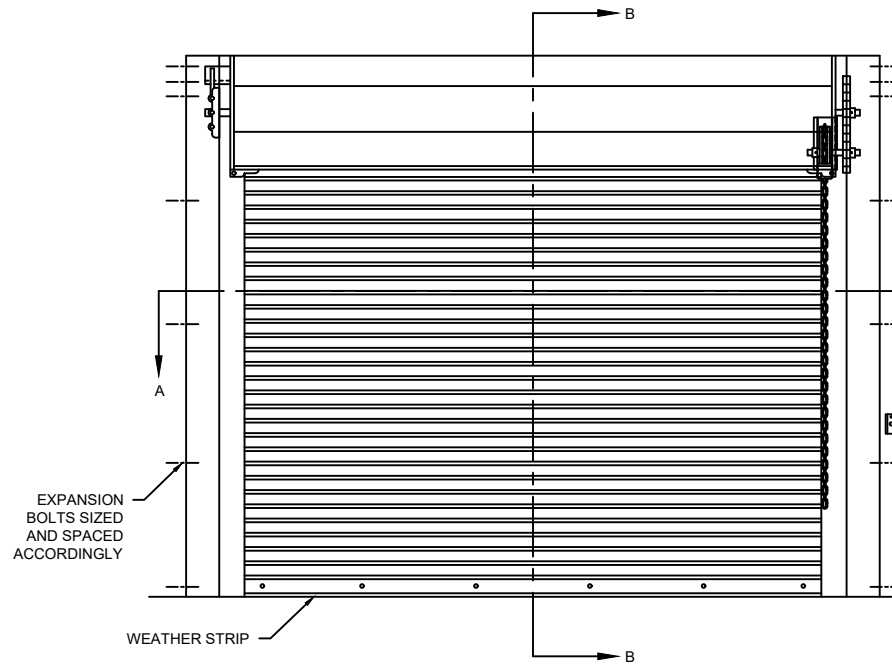


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'

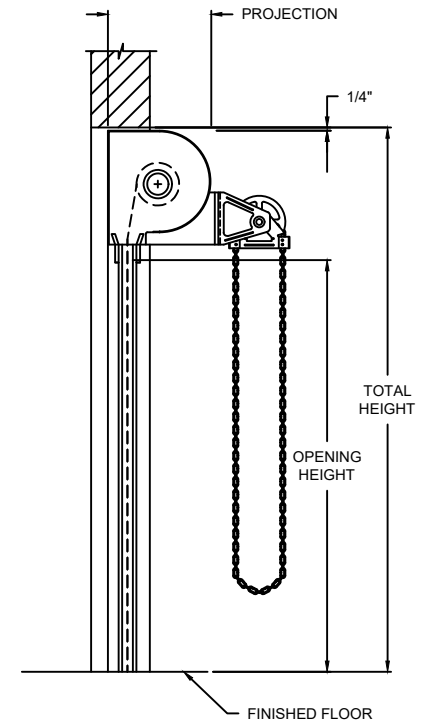

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"


ROLLING SERVICE

800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CHAIN HOIST RH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'



Z GUIDE DETAIL




F TUBE DETAIL




#14 SLAT SECTION #BCO-3165 SLAT SECTION

OPTIONS


OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

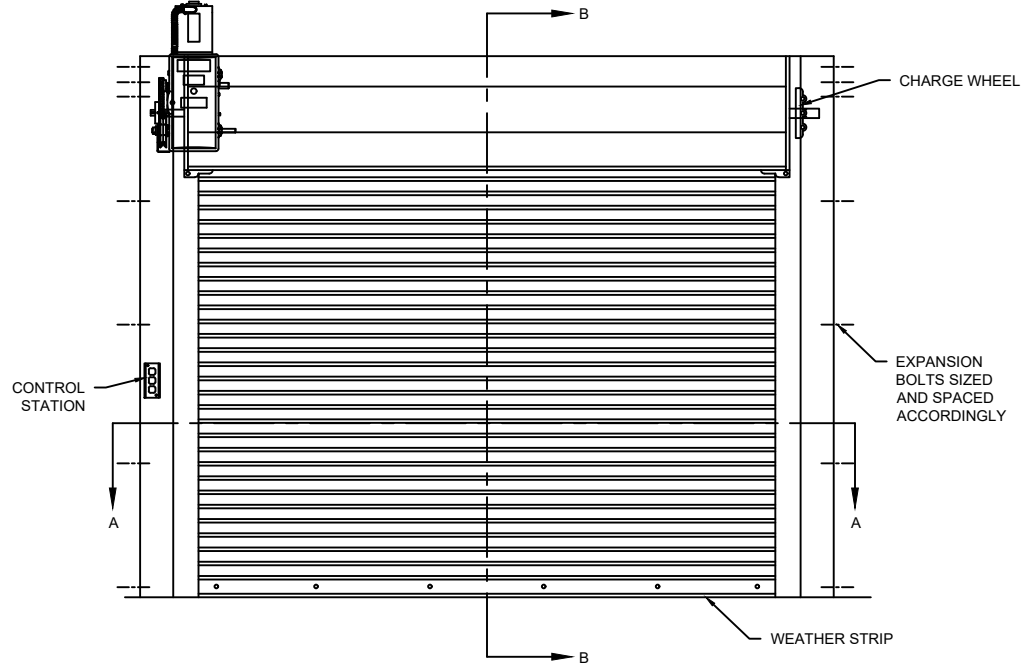

ELEVATION

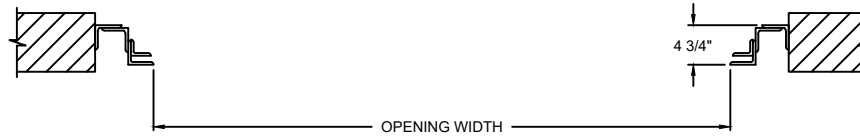

SECTION A-A

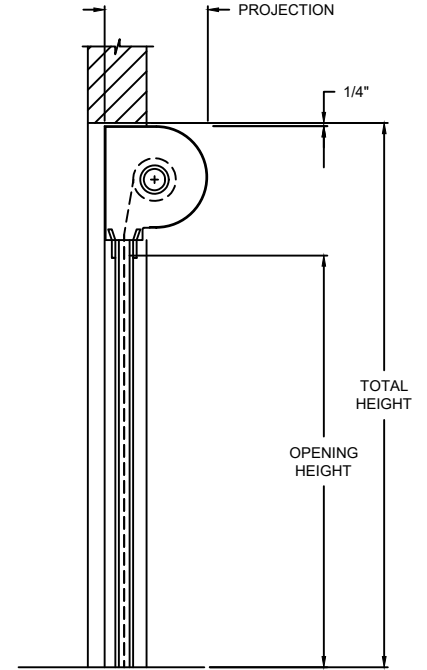

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

ROLLING SERVICE


800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RXH LH FOH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL




F TUBE DETAIL




#14 SLAT SECTION #BCO-3165 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

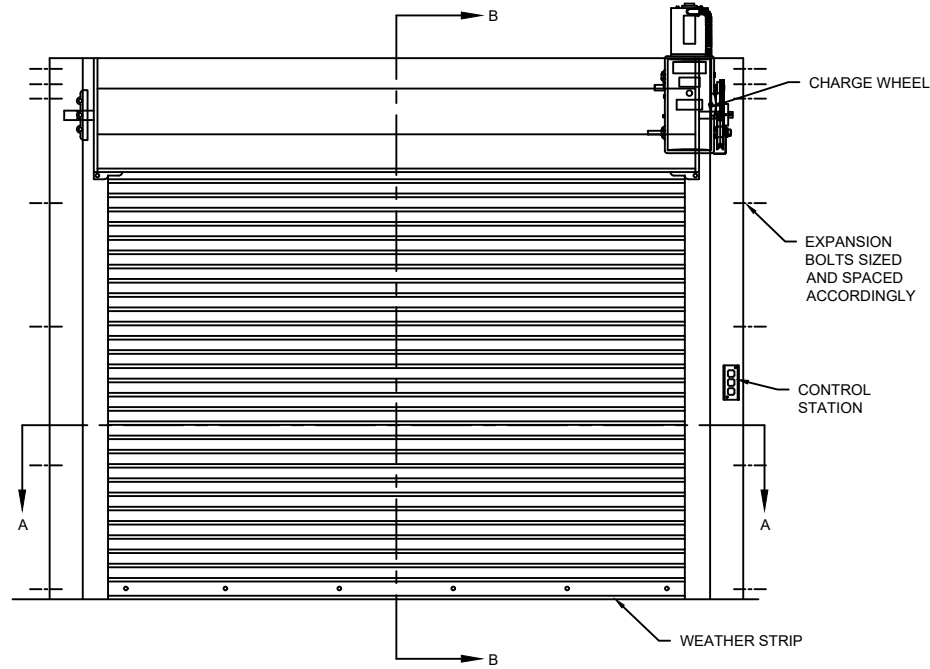


ELEVATION

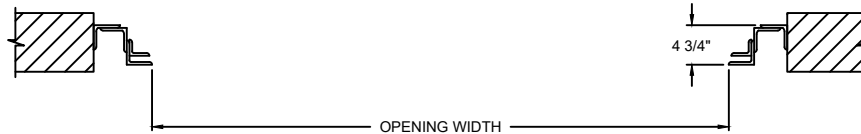

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800C	42'	40'

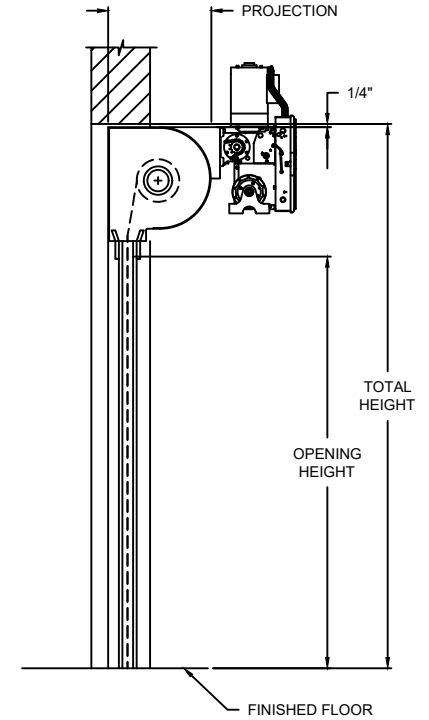

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

ROLLING SERVICE

800C ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RXH RH FOH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		