
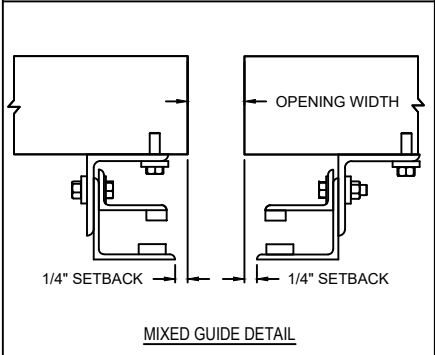
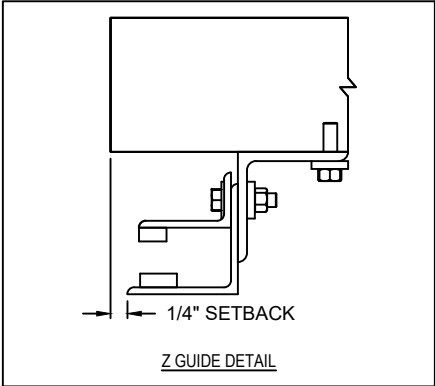
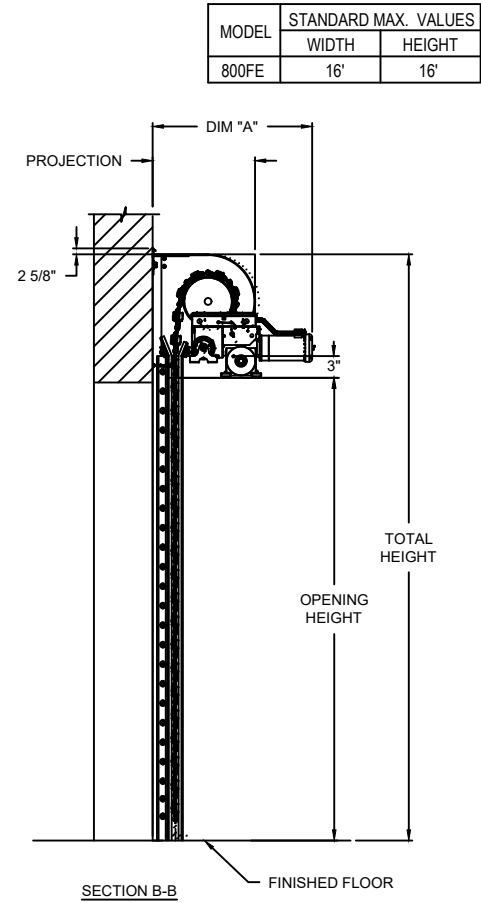
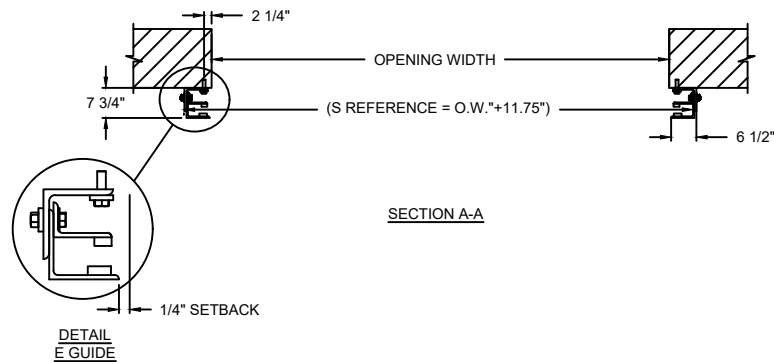


OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH BENCH MOUNT	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

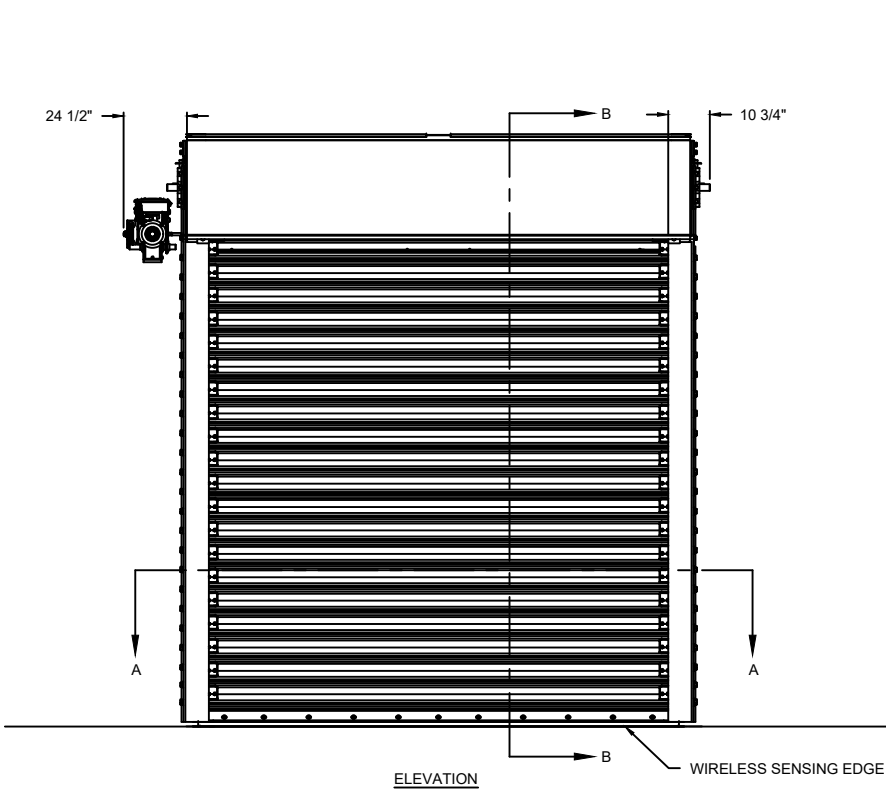

DOOR HEIGHT	DIM "A"
LESS THAN 7'-0"	32-7/8"
7'-0" OR GREATER AND LESS THAN 12'-0"	33-1/8"
12'-0" OR GREATER	35-1/8"

PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR

DWG. NO.	DATE:	
SHEET	BY:	

1/4" SETBACK

Z GUIDE DETAIL

1/4" SETBACK

1/4" SETBACK

OPENING WIDTH

MIXED GUIDE DETAIL

1 7/16"

6"




FULL SLAT SECTION

5/8"

4 5/8"

HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

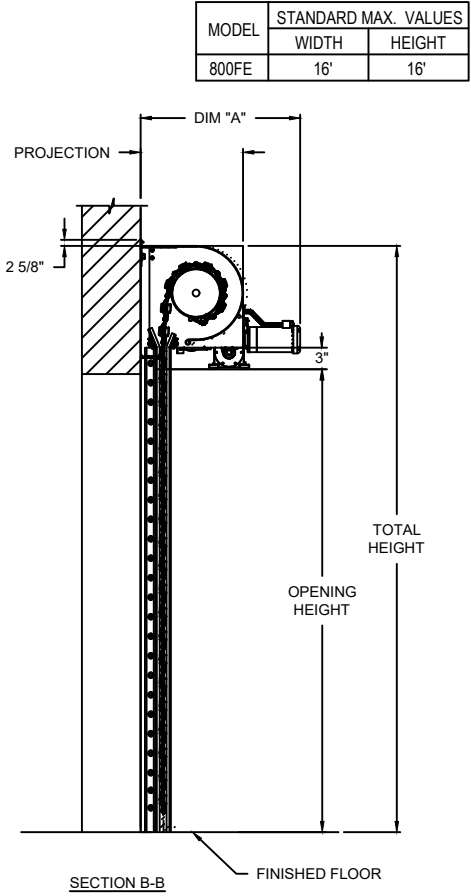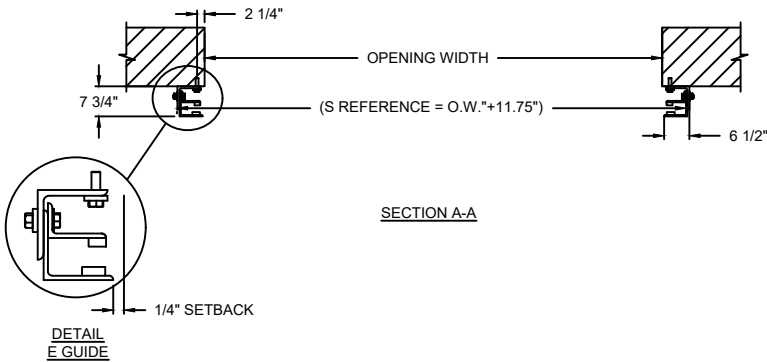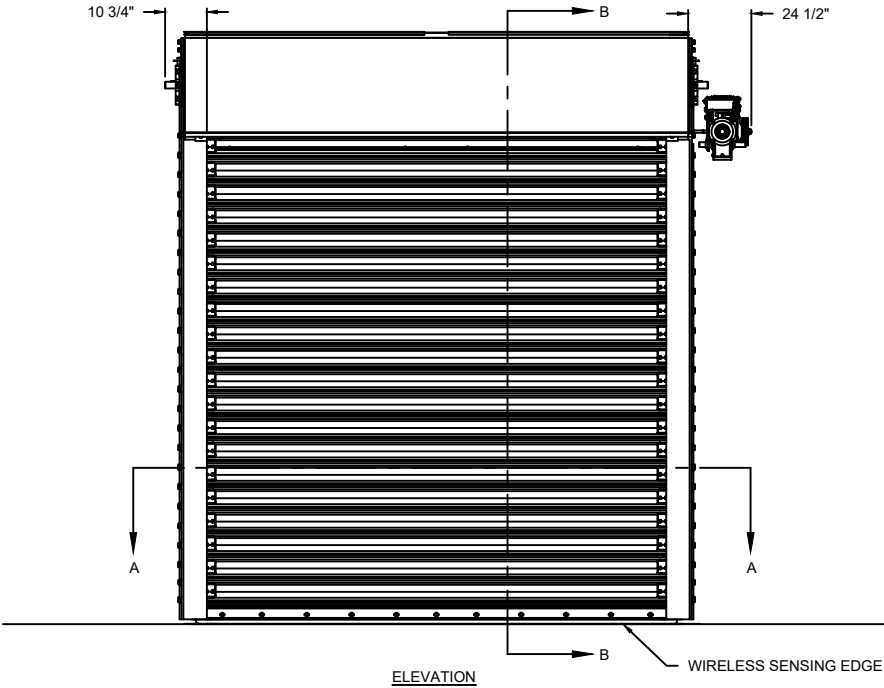

DOOR HEIGHT	DIM "A"
LESS THAN 7'-0"	32-7/8"
7'-0" OR GREATER AND LESS THAN 12'-0"	33-1/8"
12'-0" OR GREATER	35-1/8"

PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH BENCH MOUNT	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR




DWG. NO.	DATE:	
SHEET	BY:	

Z GUIDE DETAIL

MIXED GUIDE DETAIL

FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

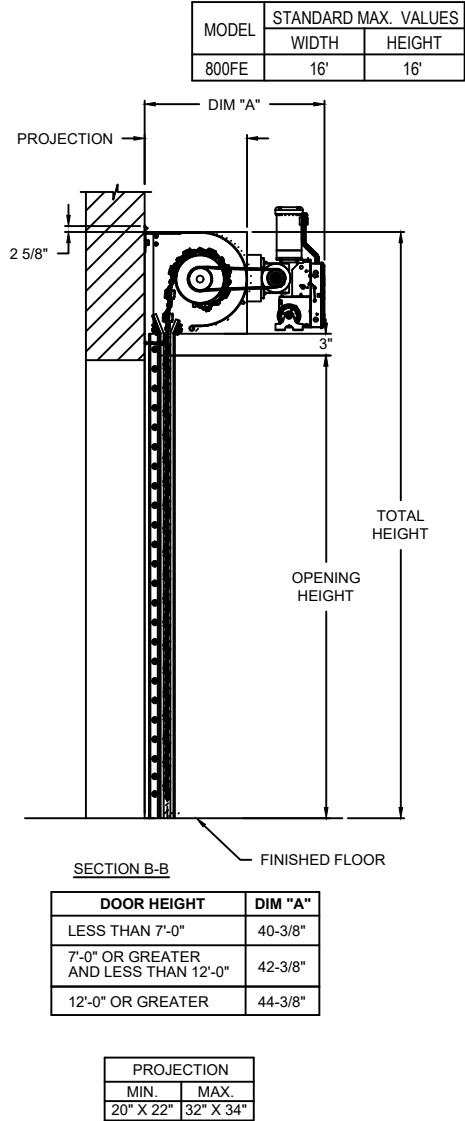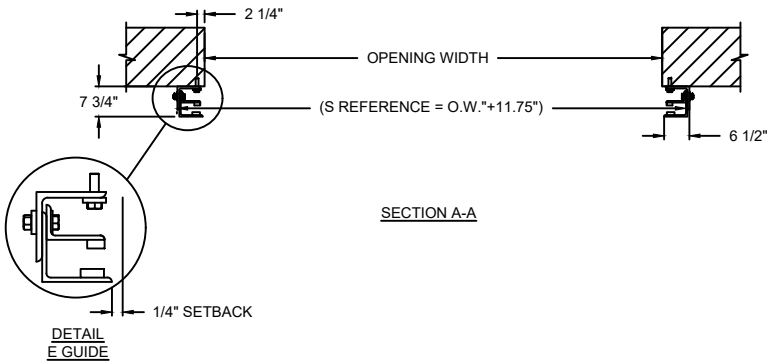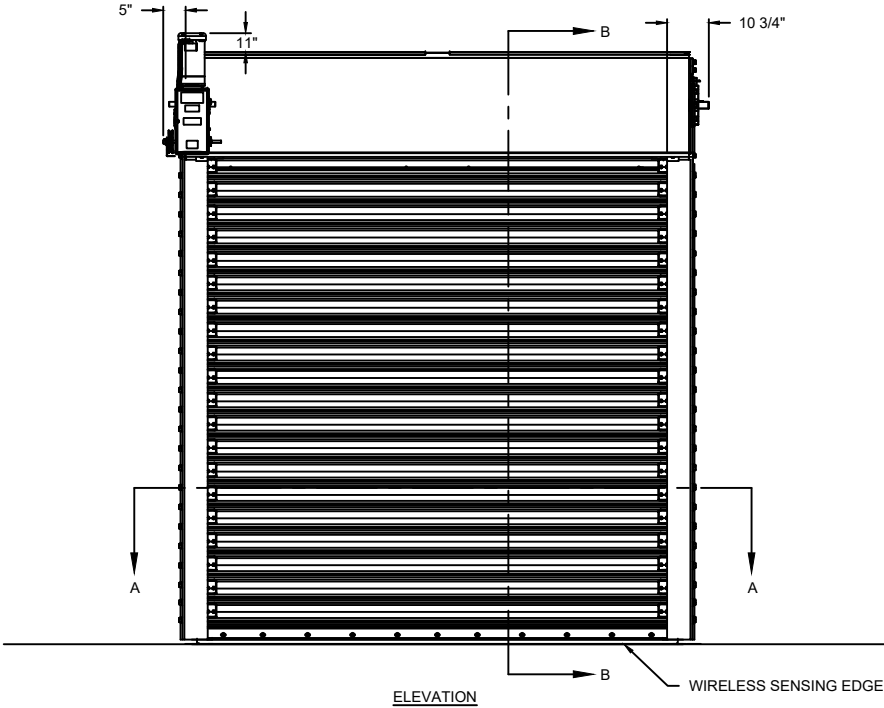


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH FRONT OF HOOD	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR


DWG. NO.	DATE:	
SHEET	BY:	



Z GUIDE DETAIL

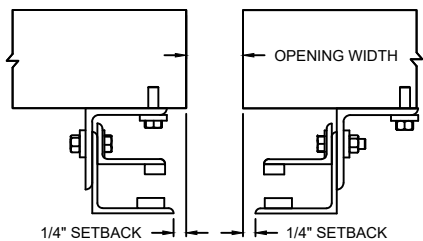


MIXED GUIDE DETAIL




FULL SLAT SECTION HALF SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

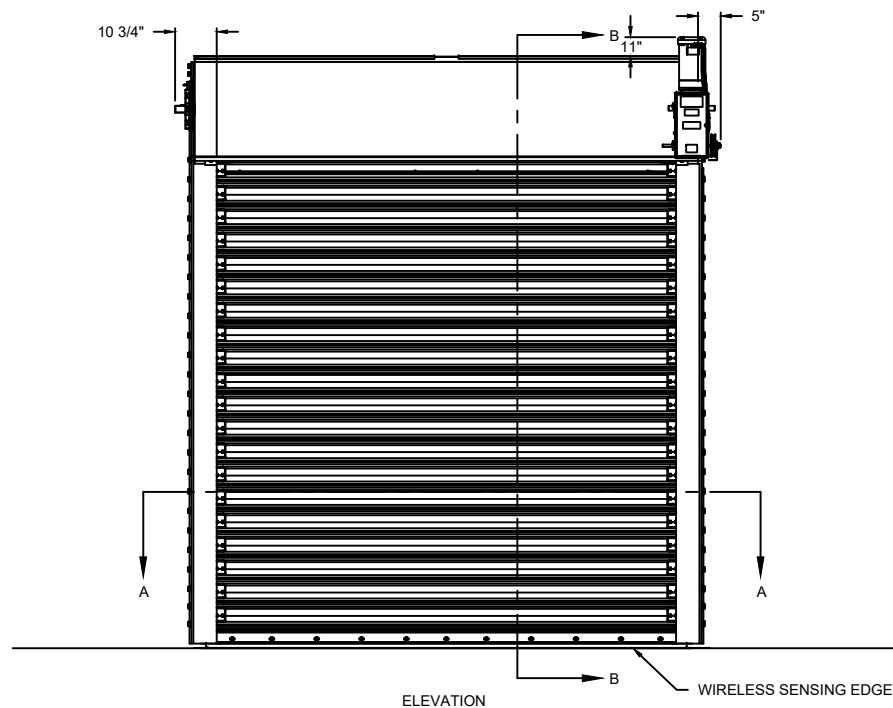


ELEVATION

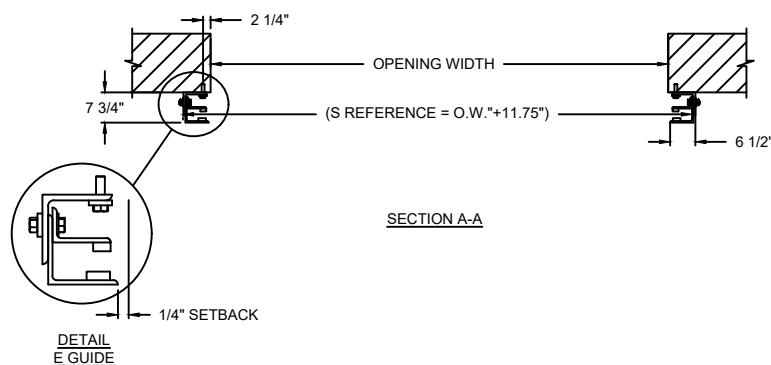

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
800FE	16'	16'

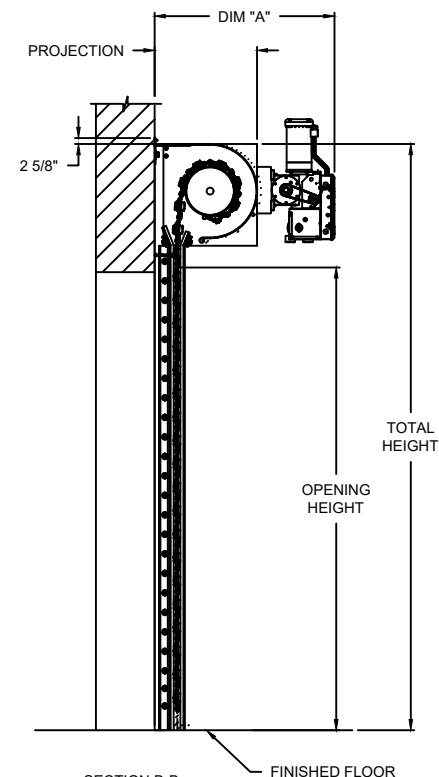

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 7'-0"	40'-3/8"
7'-0" OR GREATER AND LESS THAN 12'-0"	42'-3/8"
12'-0" OR GREATER	44'-3/8"




PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH FRONT OF HOOD	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		




ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR

DWG. NO.	DATE:	
SHEET	BY:	

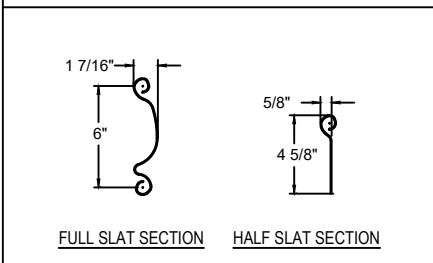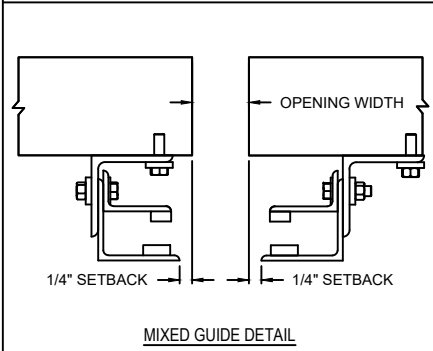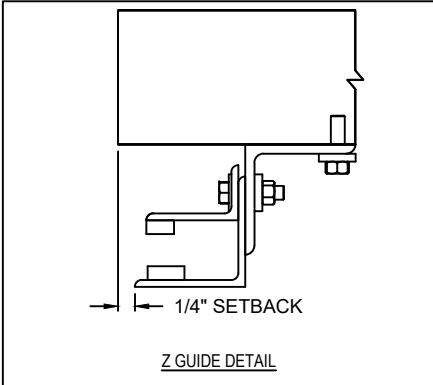

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

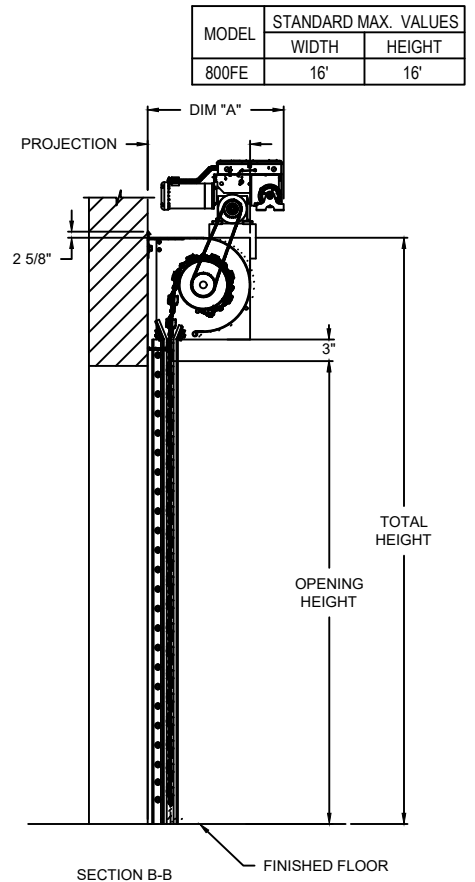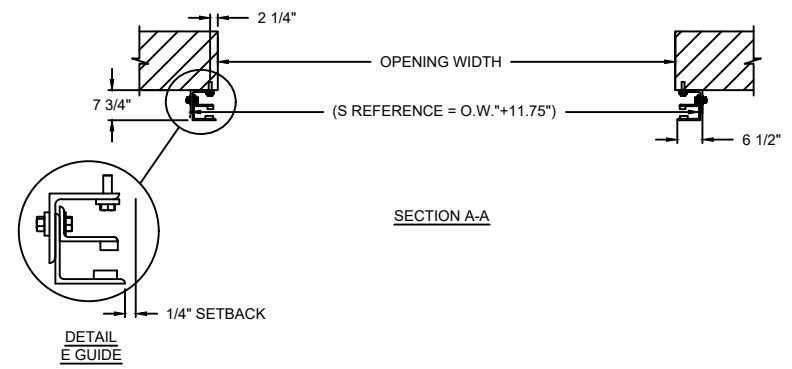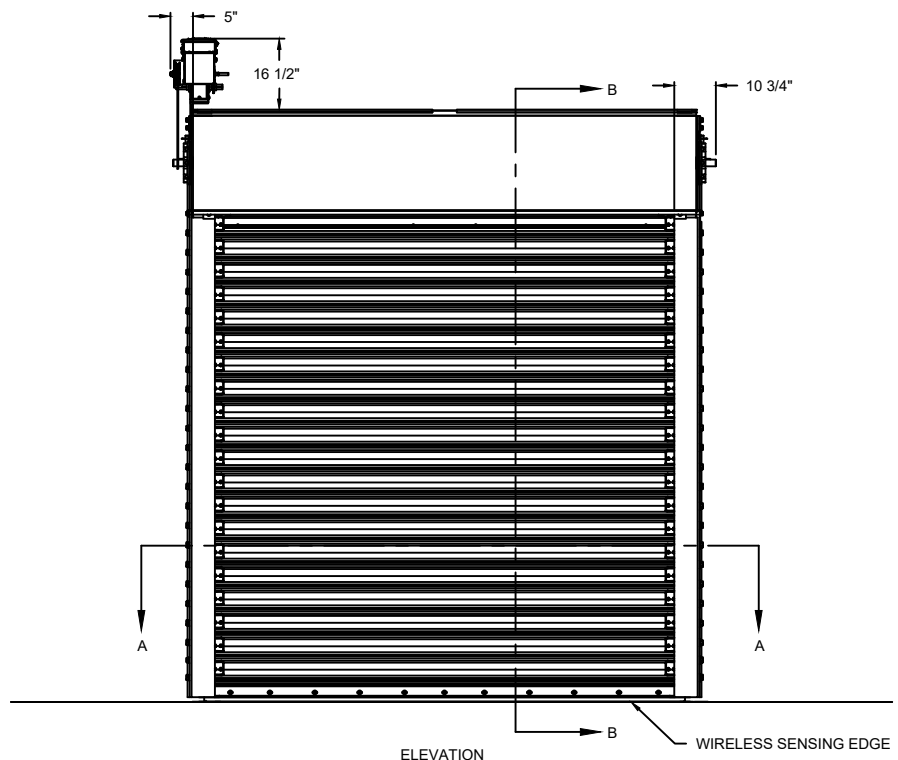

DOOR HEIGHT	DIM "A"
LESS THAN 7'-0"	33'-7/8"
7'-0" OR GREATER AND LESS THAN 12'-0"	35'-7/8"
12'-0" OR GREATER	37'-7/8"

PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH TOP OF HOOD	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR

DWG. NO.	DATE:	
SHEET	BY:	

Z GUIDE DETAIL

1/4" SETBACK

MIXED GUIDE DETAIL

1/4" SETBACK

1/4" SETBACK

OPENING WIDTH

FULL SLAT SECTION **HALF SLAT SECTION**

1 7/16"




6"

5/8"

4 5/8"

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

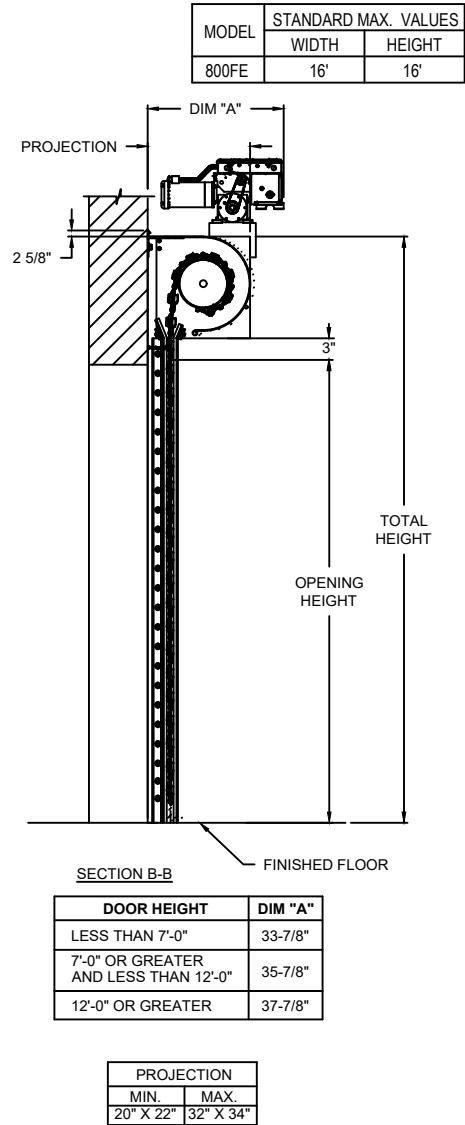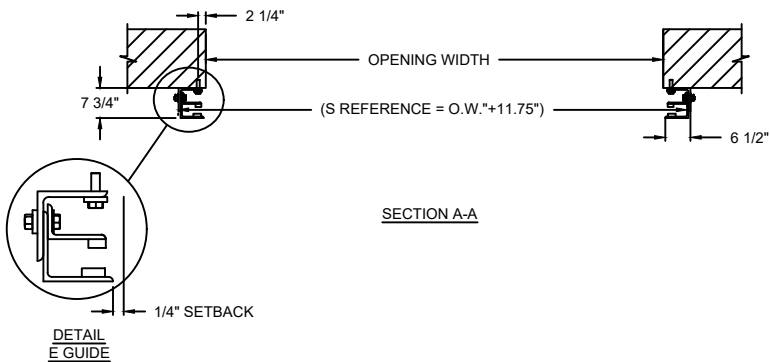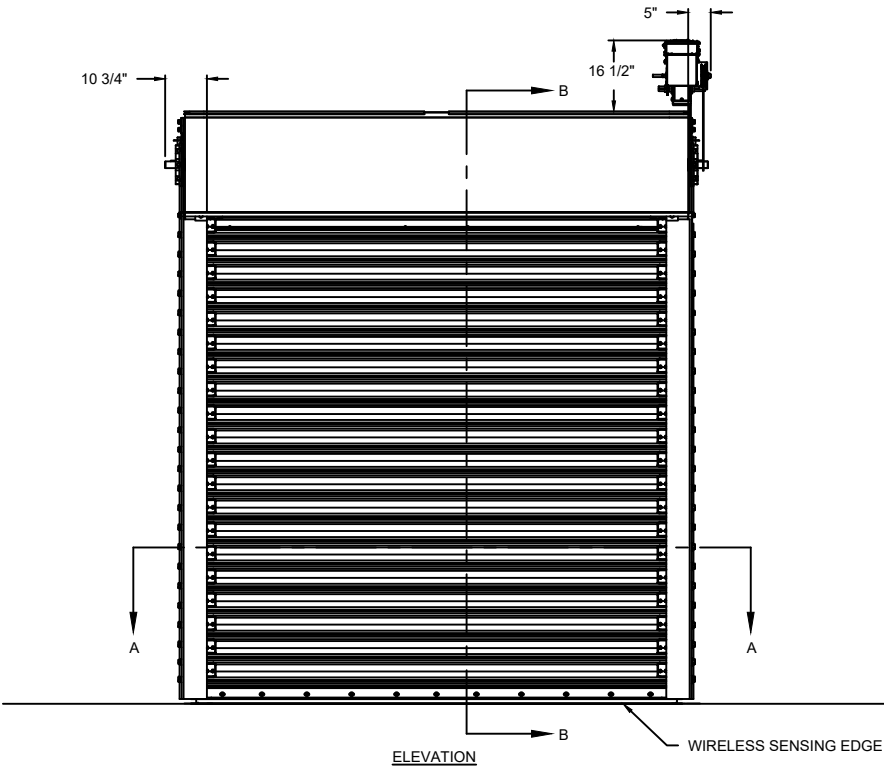

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH TOP OF HOOD	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR

DWG. NO.	DATE:	
SHEET	BY:	

1/4" SETBACK

Z GUIDE DETAIL

OPENING WIDTH

1/4" SETBACK

MIXED GUIDE DETAIL

1 7/16"




6"

5/8"

4 5/8"

FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

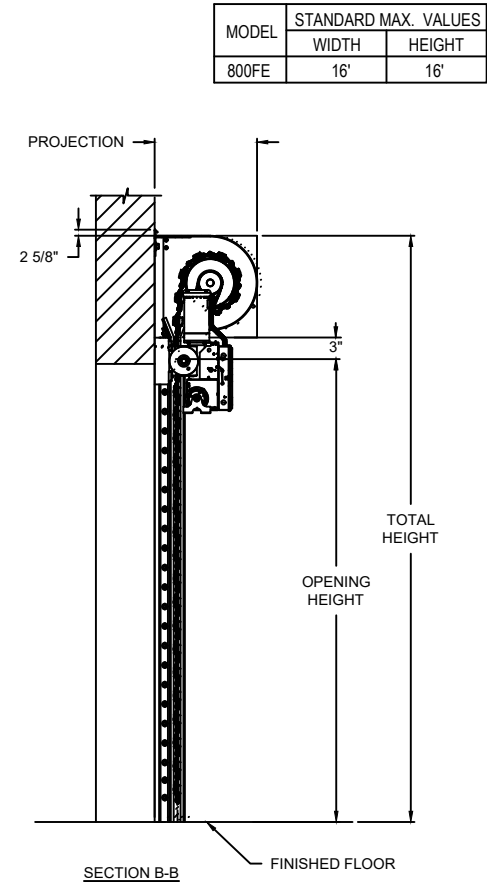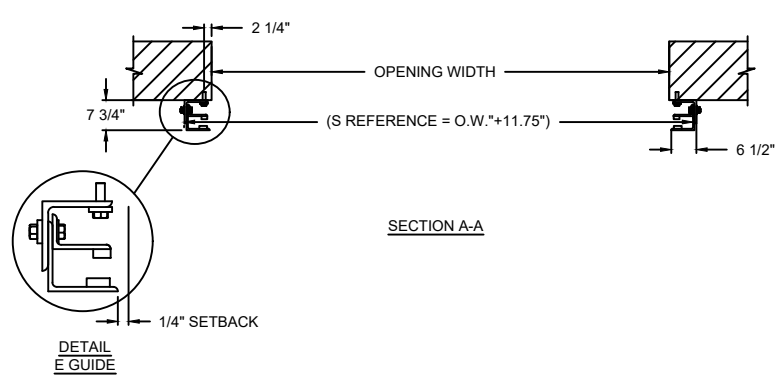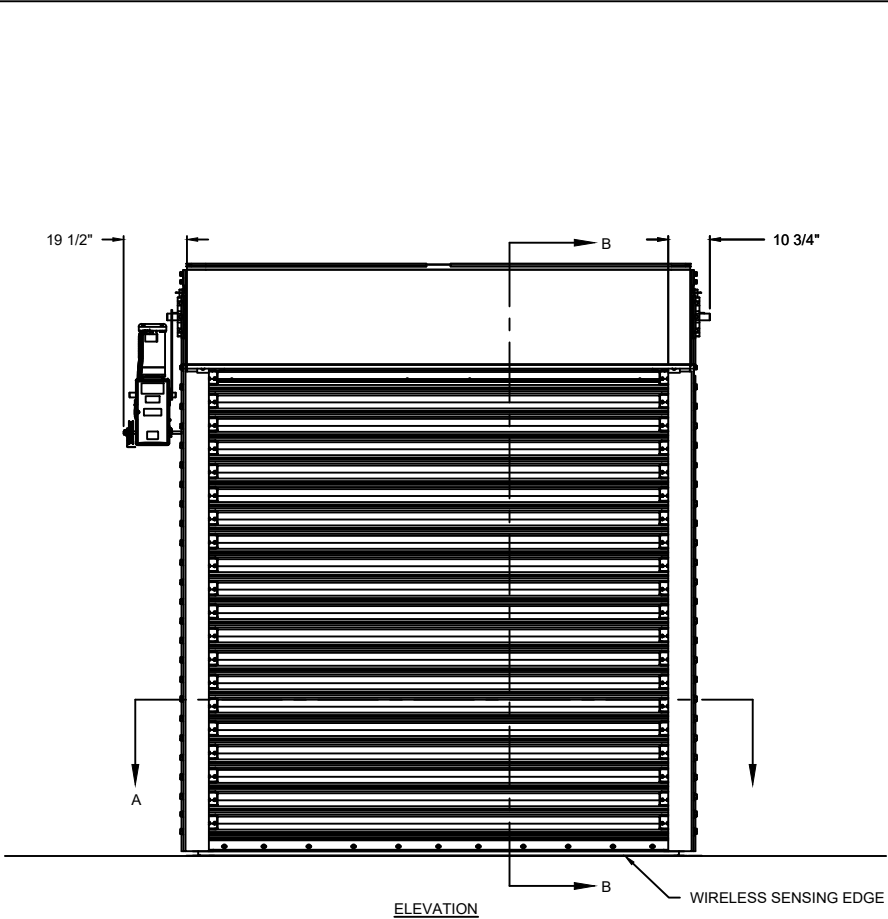

PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH WALL MOUNT	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR

DWG. NO.	DATE:	
SHEET	BY:	

1/4" SETBACK

Z GUIDE DETAIL

1/4" SETBACK

1/4" SETBACK

OPENING WIDTH

MIXED GUIDE DETAIL

1 7/16"

6"




5/8"

4 5/8"

FULL SLAT SECTION

HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

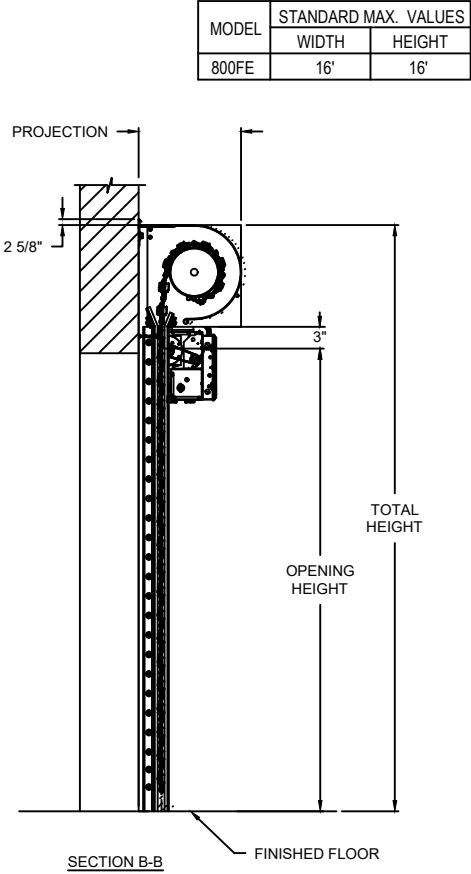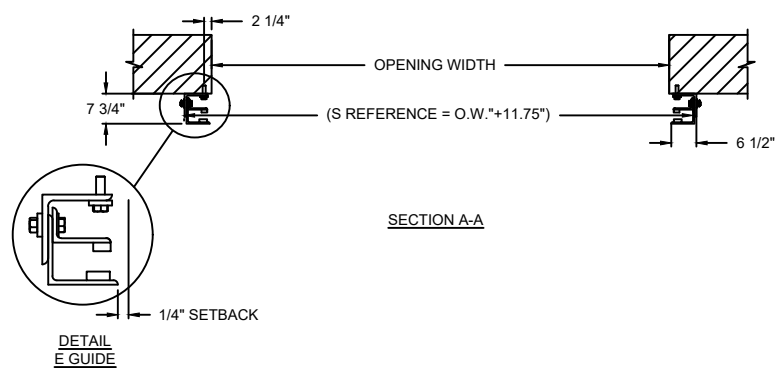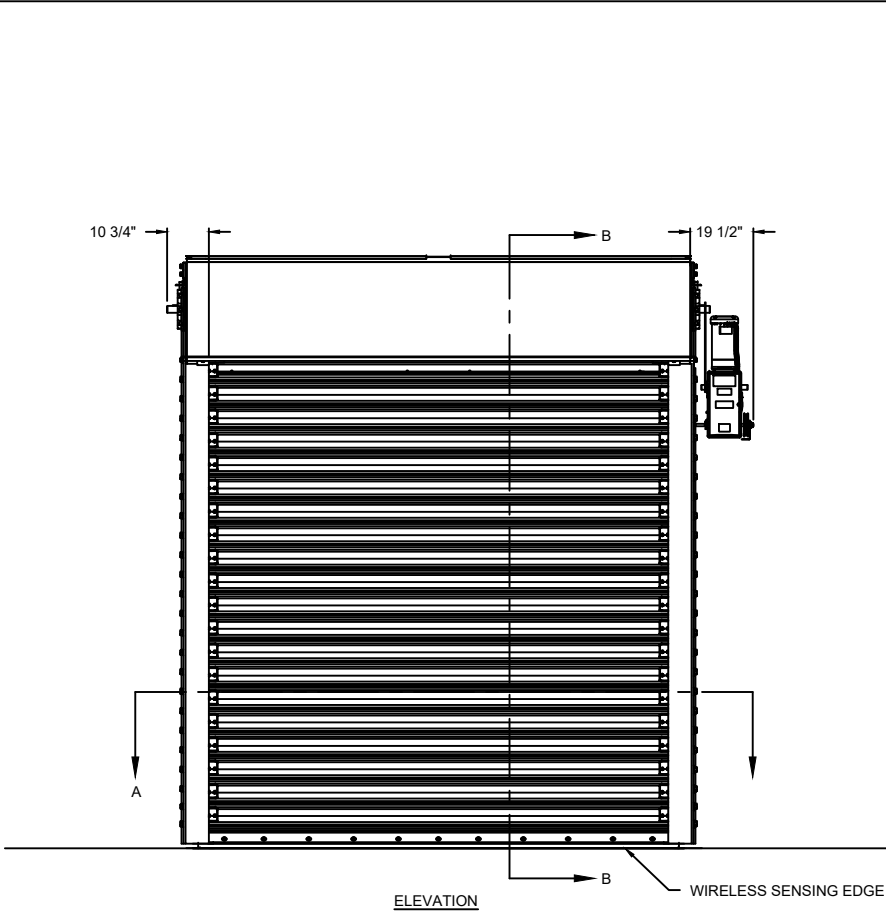

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH WALL MOUNT	RATINGS: FORCED ENTRY F3038 30 MINUTES, BALLISTICS NIJ TYPE 1 - 1-PHASE NOT AVAILABLE ON RHX 3HP, LARGER DOORS
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

ROLLING STEEL

800FE FORCED ENTRY SHELTER DOOR

DWG. NO.	DATE:	
SHEET	BY:	