



MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
770SS	10'	10'

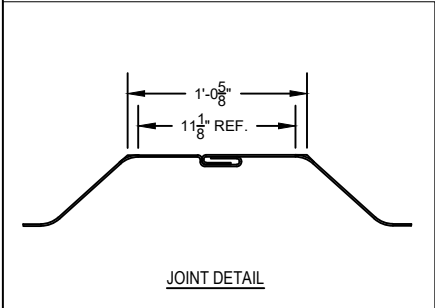


JOINT DETAIL

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
CURTAIN SLIDE LOCK	<input type="checkbox"/> RH <input type="checkbox"/> LH
HEADER DRAFT SEAL	<input type="checkbox"/> YES <input type="checkbox"/> NO
WINDLOAD RATING	<input type="checkbox"/> N/A <input type="checkbox"/> 20/-20 PSF <input type="checkbox"/> 26/-26 PSF <input type="checkbox"/> 31/-31 PSF <input type="checkbox"/> 36/-36 PSF


COMPONENT	MATERIAL	OPERATION	NOTES:
HEADPLATE	GALVANIZED STEEL	MANUAL PUSH UP CENTER HANDLE WITH SIDE STEP PLATE, AND CENTER ROPE ATTACHED TO BOTTOM BAR LOCK	1. CLEARANCES SHOWN ARE MAXIMUMS, LESSER CLEARANCES MAY BE POSSIBLE. 2. ALL OPENING PREPARATION, ELECTRICAL POWER, AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS. 3. FERROUS SURFACES ARE GALVANIZED. 4. LOCKING SHALL BE CURTAIN SLIDE LOCK SUITABLE FOR DUAL PADLOCKS
CURTAIN	HIGH STRENGTH STEEL		
GUIDES	GALVANIZED STEEL		
BOTTOM BAR	ALUMINUM		

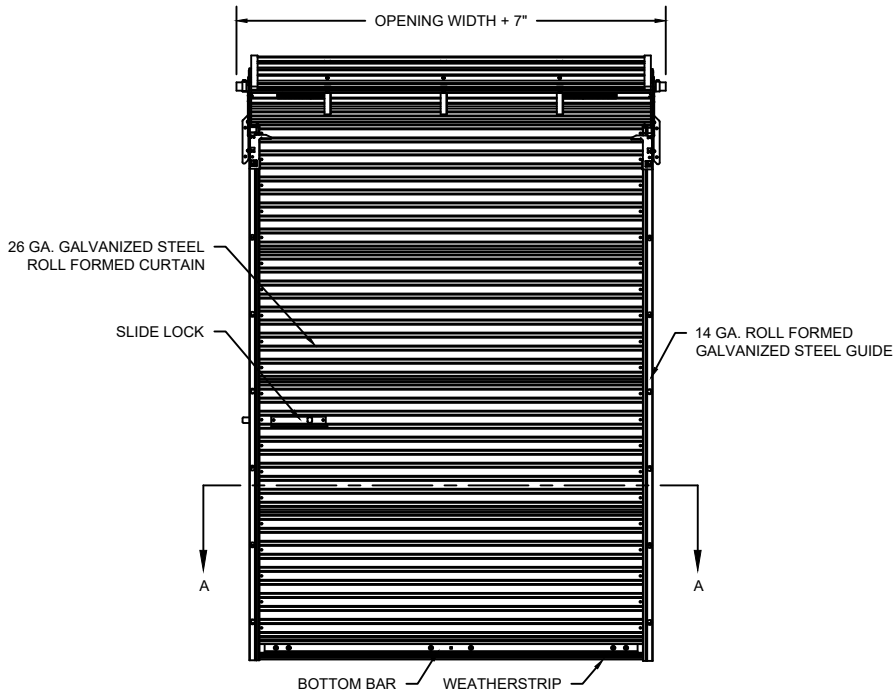

ELEVATION

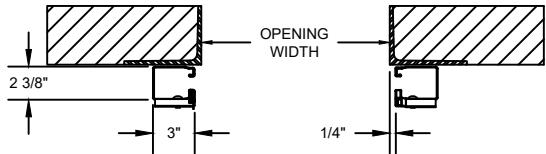


SECTION A-A

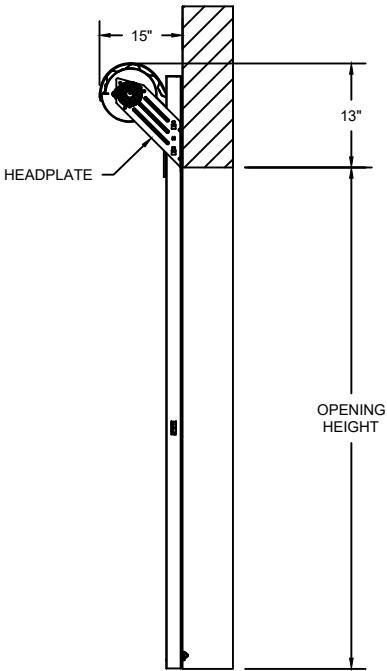

SIDE VIEW

ROLL-UP

770SS ROLL-UP SHEET DOOR

DWG. NO.	DATE:	
SHEET	BY:	