

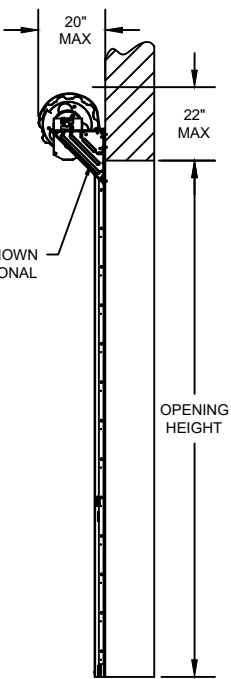


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
780CD	16'	16'

UP TO 3" MAY BE CUT OFF OF ENDS WHICH  
DO NOT HAVE CHAIN HOIST OR OPERATOR.

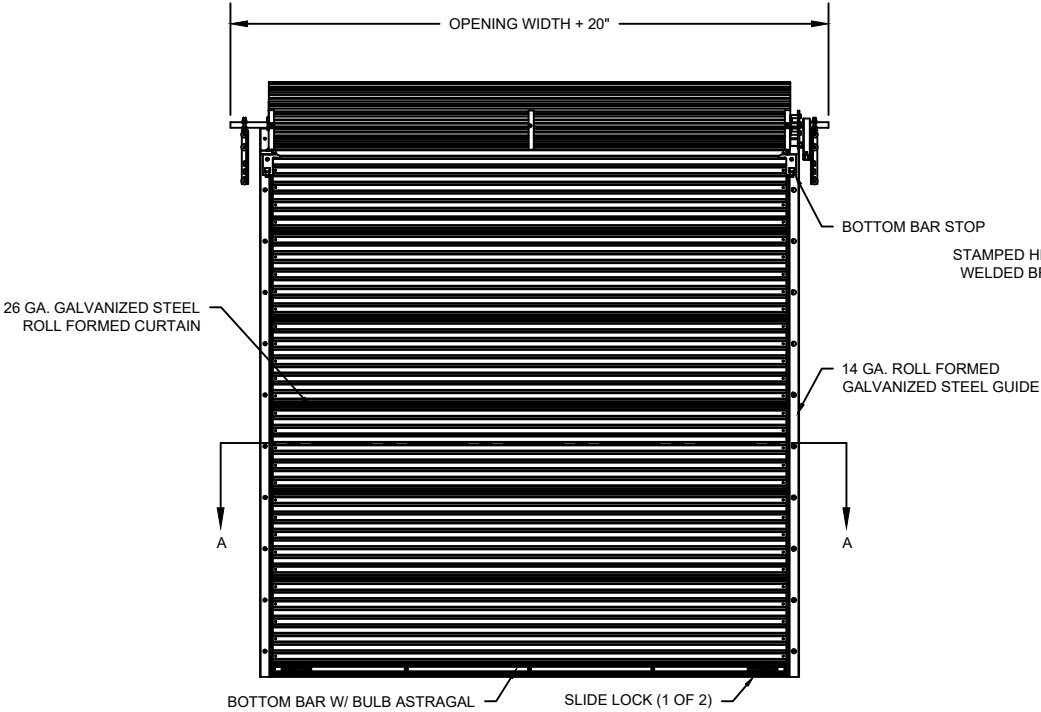


SIDE VIEW

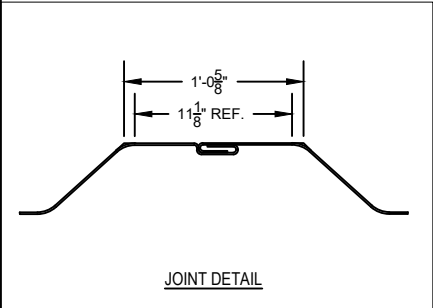

JOINT DETAIL

LOCKING SHALL BE BY:  
A. TWO SLIDE LOCKS ATTACHED TO  
BOTTOM BAR SUITABLE FOR PADLOCKS.  
B. AN OPTIONAL CHAIN HOIST LOCK.  
C. AN OPTIONAL CURTAIN LOCK SUITABLE  
FOR DUAL PADLOCKS

ELEVATION

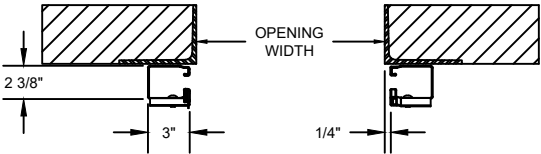

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
OPERATION OPTIONS	<input type="checkbox"/> MANUAL <input type="checkbox"/> CHAIN HOIST <input type="checkbox"/> ELECTRIC
LOCK OPTIONS	<input type="checkbox"/> SLIDE LOCKS <input type="checkbox"/> CHAIN HOIST LOCKS <input type="checkbox"/> CURTAIN LOCK

COMPONENT	MATERIAL	NOTES:
HEADPLATE	STEEL	1. CLEARANCES SHOWN ARE MAXIMUMS, LESSER CLEARANCES MAY BE POSSIBLE. 2. ALL OPENING PREPARATION, ELECTRICAL POWER, AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS. 3. FERROUS SURFACES ARE GALVANIZED.
CURTAIN	GALVANIZED STEEL	
GUIDES	GALVANIZED STEEL	
BOTTOM BAR	ALUMINUM	

# ROLL-UP

780CD ROLL-UP SHEET DOOR

DWG. NO.	DATE:	<b>Wayne Dalton.</b>
SHEET	BY:	