




MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
790CW	20'	16'

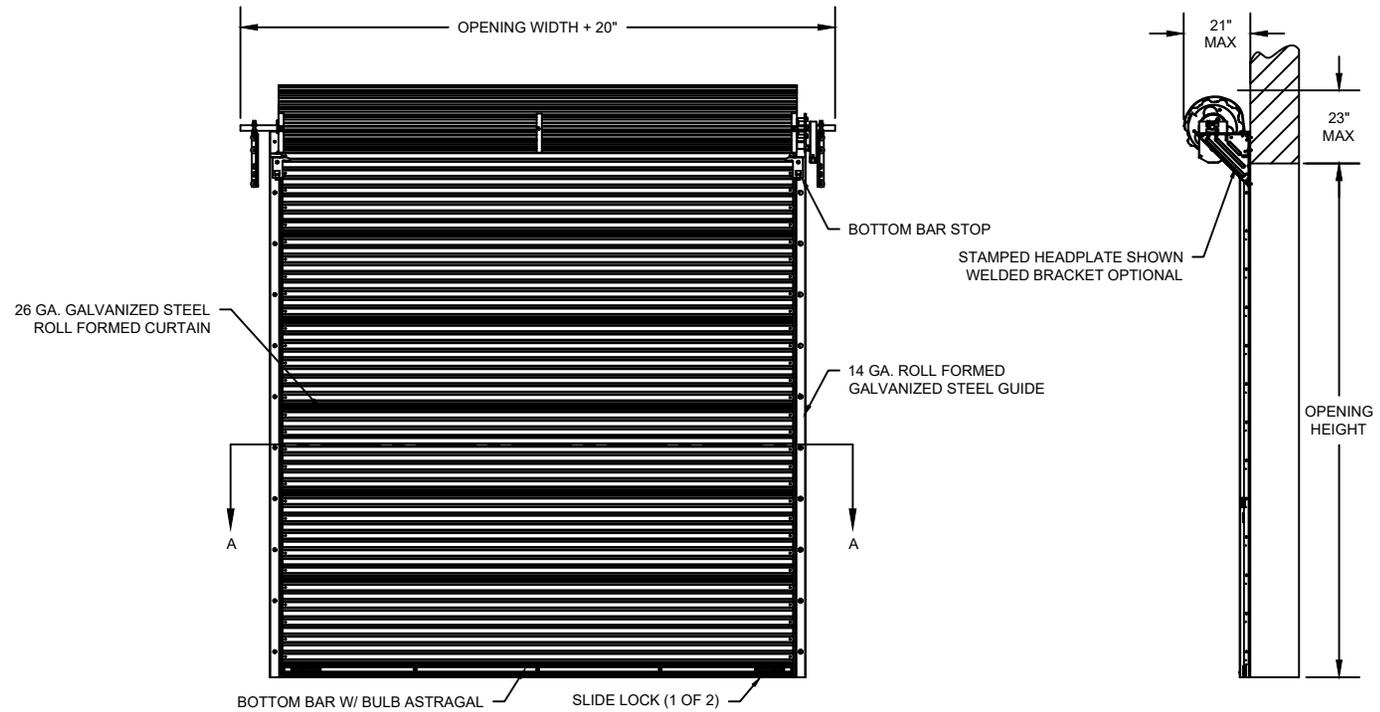

SIDE VIEW

LOCKING SHALL BE BY:
 A. TWO SLIDE LOCKS ATTACHED TO BOTTOM BAR SUITABLE FOR PADLOCKS.
 B. AN OPTIONAL CHAIN HOIST LOCK.
 C. AN OPTIONAL CURTAIN LOCK SUITABLE FOR DUAL PADLOCKS

ELEVATION

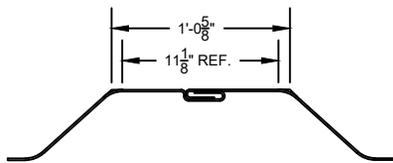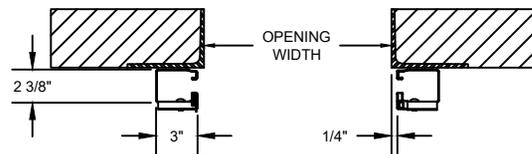

JOINT DETAIL

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
OPERATION OPTIONS	<input type="checkbox"/> MANUAL <input type="checkbox"/> CHAIN HOIST <input type="checkbox"/> ELECTRIC
LOCK OPTIONS	<input type="checkbox"/> SLIDE LOCKS <input type="checkbox"/> CHAIN HOIST LOCKS <input type="checkbox"/> CURTAIN LOCK

COMPONENT	MATERIAL
HEADPLATE	STEEL
CURTAIN	GALVANIZED STEEL
GUIDES	GALVANIZED STEEL
BOTTOM BAR	ALUMINUM

NOTES:

- CLEARANCES SHOWN ARE MAXIMUMS, LESSER CLEARANCES MAY BE POSSIBLE.
- ALL OPENING PREPARATION, ELECTRICAL POWER, AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
- FERROUS SURFACES ARE GALVANIZED.

- INTEGRATED CURTAIN WIND LOCKS AND GUIDE TO WITHSTAND WIND LOADING TO MINIMUM DESIGN PRESSURES OF 22/22 PSF

ROLL-UP

790CW ROLL-UP SHEET DOOR

DWG. NO.	DATE:	Wayne Dalton.
SHEET	BY:	