




# Storm Protection Products

WIND LOAD-RATED GARAGE DOORS AND STORM PANELS

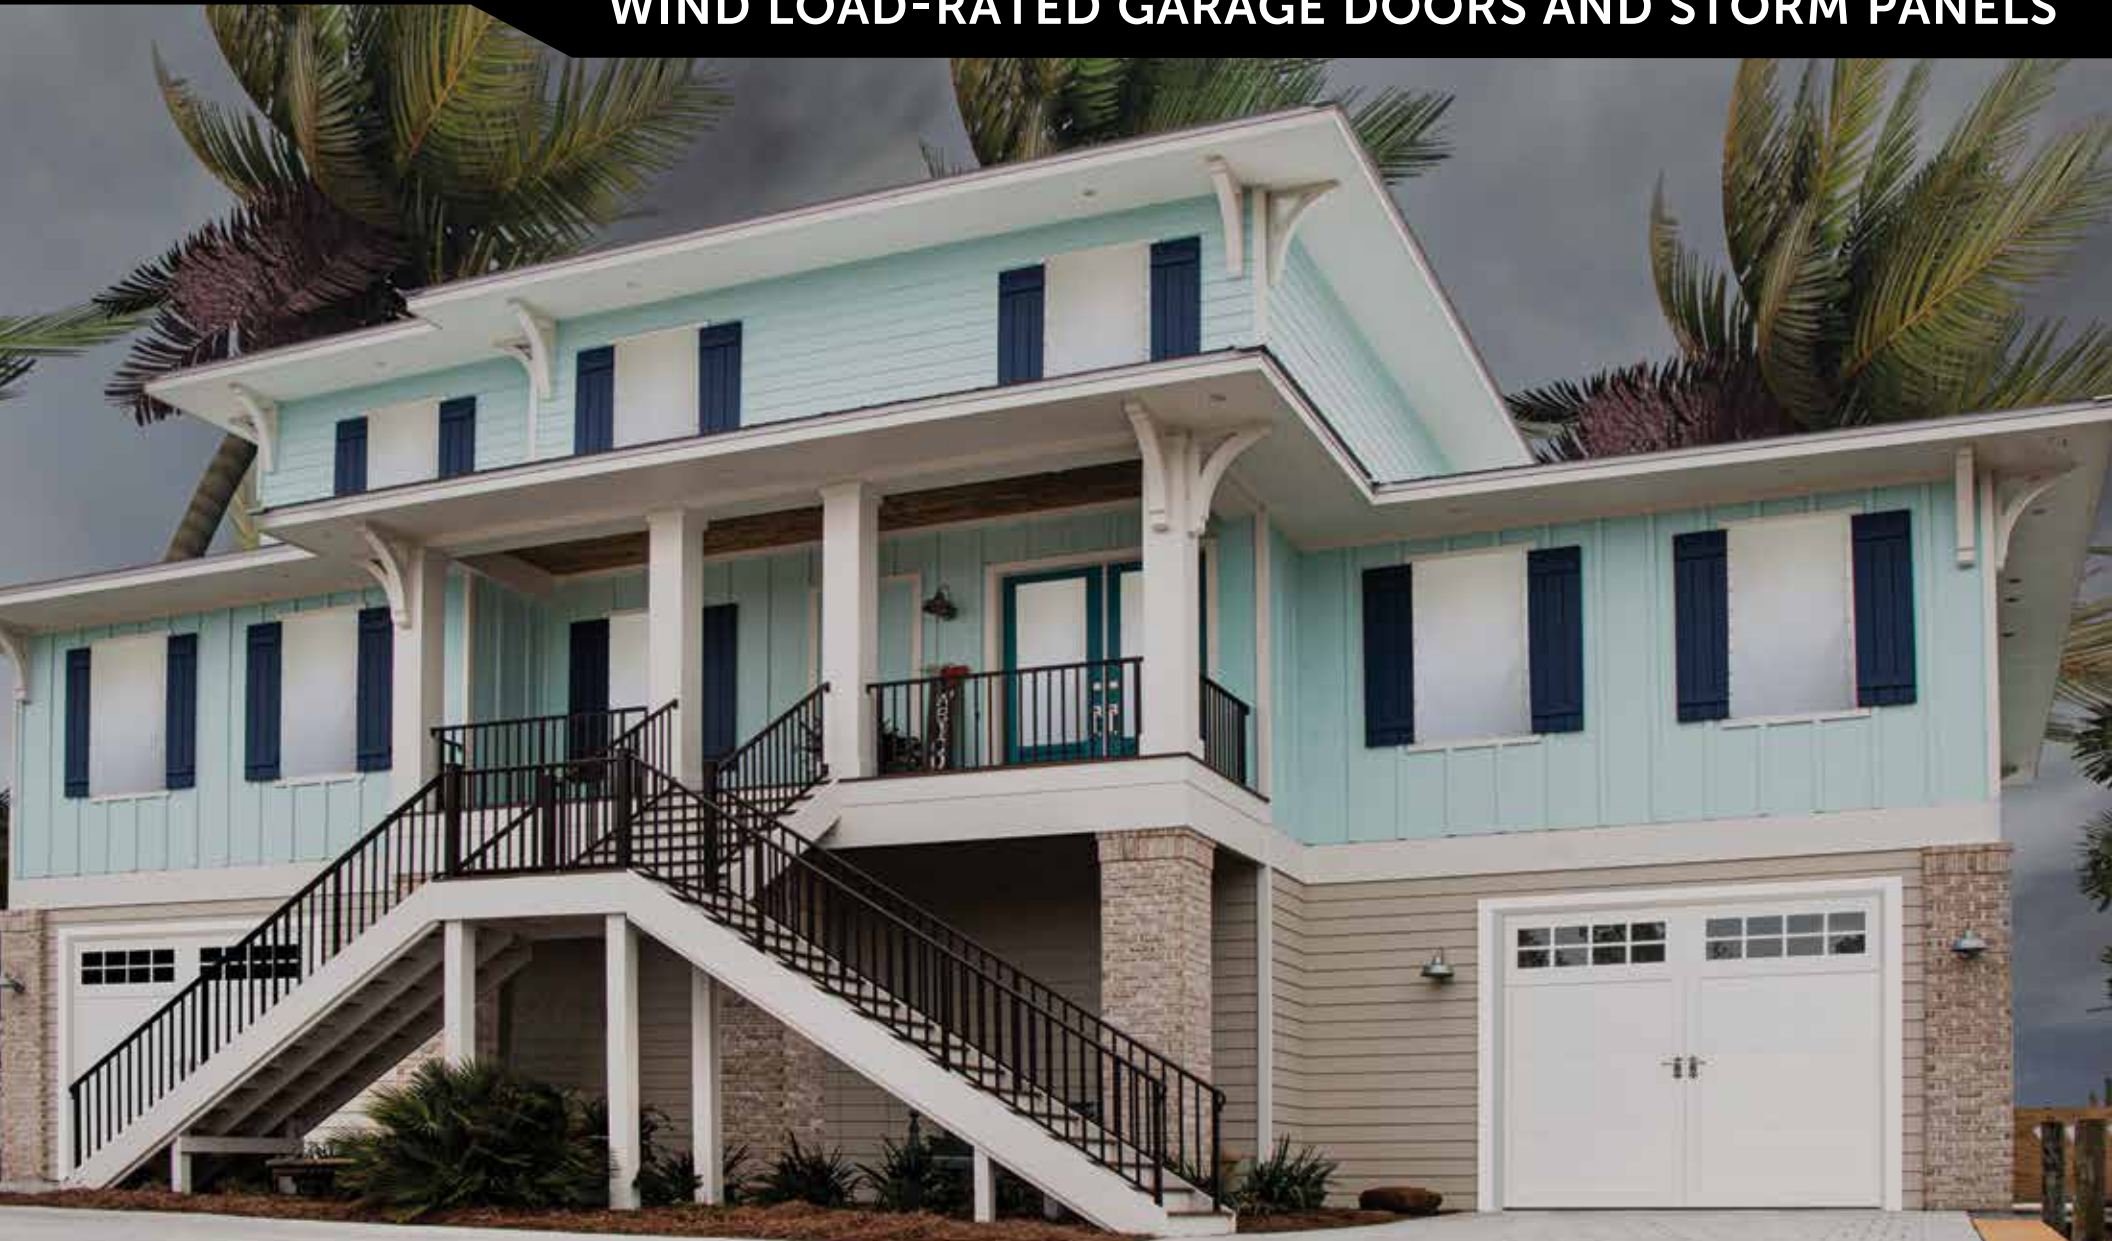

# Severe storm defense

During a hurricane or severe storm, the structural integrity of your home can be compromised if wind forces cause the garage door to buckle. Help protect your home against the damaging effects of wind pressure during severe weather events with a wind-resistant garage door from Wayne Dalton.

## Approval Agencies / Building Codes

DOOR MODELS	8600	8024 8224	8300 8300AG	8500 8500AG	8350	8000 8200	9100	9605	9405	8855	8700	FABRIC SHIELD
PAGE NUMBERS	4-5	6-7	8-9	10-11	12-13	14-15	16-17	18-19	20-21	22-23	24-25	26
International Building Code (IBC) and International Residential Code (IRC)	•	•	•	•	•	•	•	•	•	•	•	•
Florida Building Code (FBC)	•	•	•	•	•	•	•	•	•	•	•	•
Florida Building Code (FBC) - Impact Rated	•	•	•	•	•	•	•	•	•	•		•
Texas Department of Insurance (TDI)	•	•	•	•	•	•	•	•	•			•
Texas Department of Insurance (TDI) - Impact Rated	•	•	•	•	•	•	•	•	•			•
Miami-Dade County approved	•	•	•	•	•							

All wind load options must be specified at time of order.



## Wind load-rated garage doors



Wayne Dalton offers wind load reinforcement options with many of its most popular garage doors. Doors with the WindSafe® logo comply with requirements of one or more approval agencies, including: the Florida Building Code, Texas Department of Insurance and Miami-Dade (FL) County.



High-grade carbon steel hinges add stability.



A combination of quick install and heavy duty jamb brackets secure track to door frame.



Top section roller slide attached to U-bar resists inward and outward force.




3" commercial grade U-bars provide horizontal stability.



Bottom section roller slide attached to U-bar resists inward and outward force.

## Impact-rated garage doors

Wayne Dalton door models with the impact logo have been approved for impact resistance. Always consult with your local building authority to ensure compliance with local building code requirements.



Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.

Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

# Lose the garage door, lose the home

Post-storm analysis indicates that 80% of residential hurricane damage begins with wind entry into the garage.<sup>1</sup> If the integrity of your home is compromised, wind, rain and blown debris have easy access into your home.

3

With wind speeds exceeding 111 mph (Category 3 or greater hurricane), the extraordinary pressure inside the home can compromise the structural integrity of walls and roof.

4

Induced internal air pressure can reach such a magnitude that it can literally blow off the roof and tear apart wall panels.

5


Window openings as small as 4 square feet can pressurize the home's interior, exerting forces on the structure like a turbine engine.

2

Debris driven by high velocity hurricane winds become powerful projectiles that can pierce ordinary garage doors breaching their integrity.

1

High wind events can cause un-reinforced garage doors to buckle, forcing the door out of the track and causing catastrophic door failure.

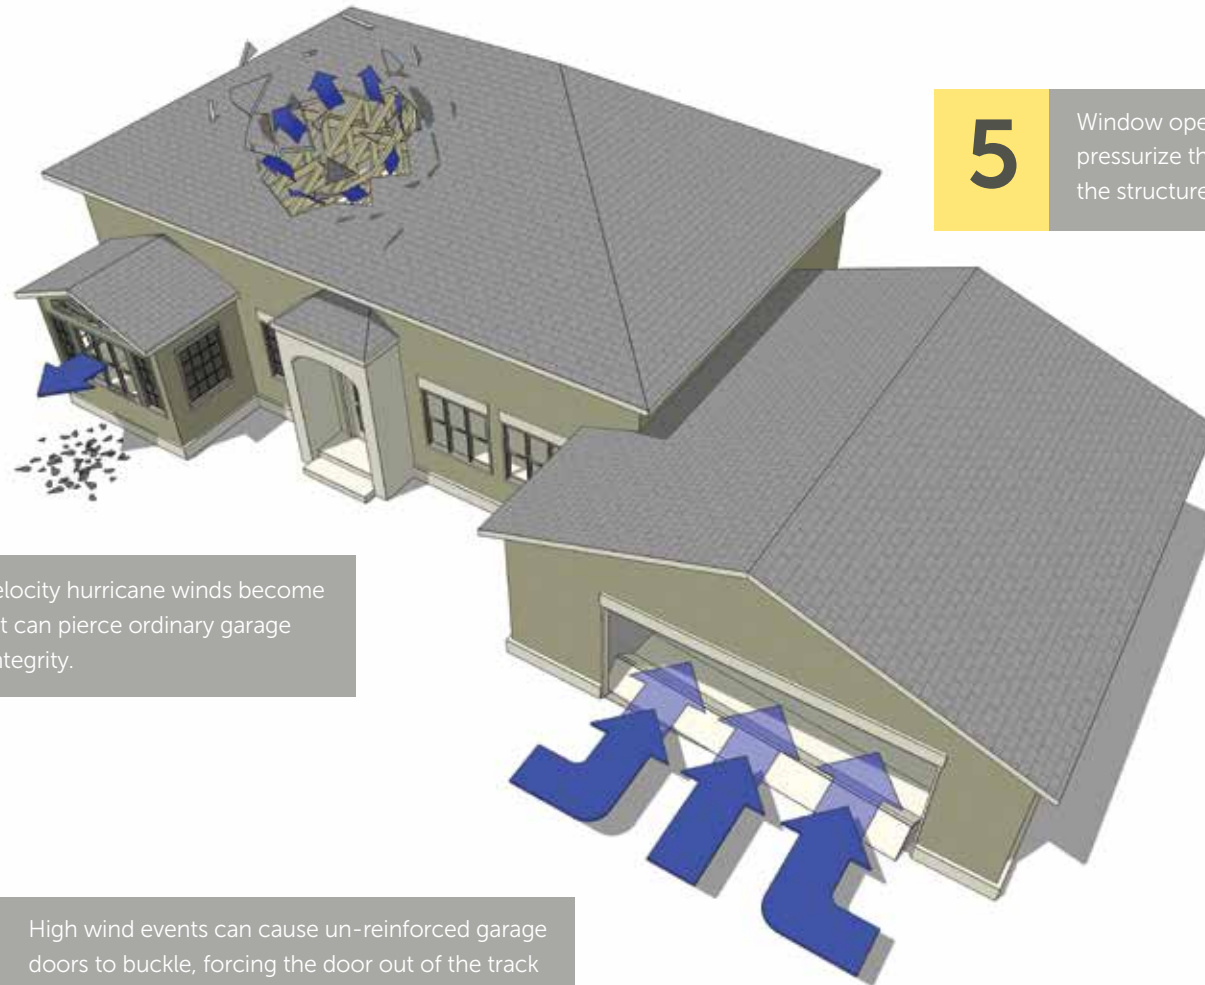


<sup>1</sup>Federal Alliance for Safe Homes (FLASH)<sup>®</sup> 2014.

# MODEL 8600

# Carriage House Steel

The Model 8600 garage door is a terrific choice for performance and value. It has excellent insulating ability that provides thermal efficiency and reduces street noise. Choose from eleven panel options.

- Distinctive Carriage House designs
- Foamed-in-place polyurethane insulation
- U-factor\*  = 0.15
- R-value\*\* = 12.12

- Durable four-layer construction
- Limited Lifetime Warranty



MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8600	9'	100 - 220 mph <sup>1</sup> / 125 - 280 mph <sup>2</sup> (+12.80/-14.80) - (+64.00/-72.00)	YES <sup>3</sup>	LONG WINDOW <sup>3</sup>	LONG WINDOW <sup>3</sup>
	16'	100 - 195 mph <sup>1</sup> / 125 - 240 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	LONG WINDOW <sup>3</sup>	LONG WINDOW <sup>3</sup>
	18'	100 - 190 mph <sup>1</sup> / 125 - 230 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	LONG WINDOW <sup>3</sup>	LONG WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

## 1 Choose Your Style

All door top sections are available in arch or square design. Most double-car designs appear as 2 single-car doors side by side.

## 2 Choose Your Color

### Painted Finishes (standard)

### DecaTrim™ II Overlay Texture Options

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.



\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.  
\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

### 3 Choose Your Windows

Window patterns are shown for a typical single-car door. Spacing of windows may change depending on door size. Not all windows are available in all door sizes.

#### Routed windows

Routed windows are only available with smooth overlay trim.



Clear Long



Stockton Arch



Stockton



Stockbridge



Somerton



Wyndbridge

#### Framed Insert windows

Framed Insert windows are available for both smooth and wood grain overlays.



Clear Long



Stockton Arch



Stockton



Stockbridge




Somerton



Wyndbridge


#### Window Comparison

Doors built with the **Routed windows** use a clean top section design where the wood overlay is routed from a wood face panel.



Arlington panel with Routed Stockbridge windows

Doors with **Framed Insert windows** use a classic wood door design with the top section constructed from wood overlay boards.



Arlington panel with Framed Insert Stockbridge windows

**Impact-resistant windows are available. (Miami-Dade Broward approved upgrade).**

**CONTACT YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS.**



Springfield panel, White/Almond finish, Decorative hardware

# MODELS 8024/8224

# Classic Steel

With a 24-gauge steel skin, this door has box-shape 20-gauge stiles and 16-gauge end stiles for strength and rigidity.

- 10-Year Limited Warranty
- R-value\* = 7.4 (Model 8224)




Model 8024, Colonial panel, Almond finish, Stockton I windows


MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8024/8224	9'	185 mph <sup>1</sup> / 230 mph <sup>2</sup> (+46.00/-52.00)	YES	NO	SHORT WINDOW <sup>3</sup>
	16'	185 mph <sup>1</sup> / 230 mph <sup>2</sup> (+46.00/-52.00)	YES	NO	SHORT WINDOW <sup>3</sup>
	18'	185 mph <sup>1</sup> / 230 mph <sup>2</sup> (+46.00/-52.00)	YES	NO	SHORT WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES


## 1 Choose Your Style



Colonial



Ranch\*\*



Sonoma

\*\*Windows not available

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.

\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

## 2 Choose Your Color

### Painted Finishes (standard)



White



Almond



Black



### 3 Choose Your Windows

For Colonial and Sonoma† Panels (Impact only)




Clear I



Prairie I



Sherwood I



Stockton I

†Impact windows not available on Model 8124 Sonoma panel.

**CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS. Impact-resistant windows are available. (Miami-Dade Broward approved upgrade).**




Model 8024, Colonial panel, White finish, Cathedral I windows

# MODEL 8300

MODEL 8300AG


# Classic Steel

The Model 8300 Classic Steel garage door will deliver years of dependable performance. It features distinct wood grain embossed steel panels with foamed-in-place insulation.


- Premium steel construction
- U-factor\*  = 0.15
- R-value\*\* = 12.12

- Limited Lifetime Warranty
- Foamed-in-place polyurethane insulation


## 1 Choose Your Style




Short Panel




Long Panel



Vertical Short Panel



Vertical Long Panel



Flush Panel

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.

MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8300	9'	100 - 220 mph <sup>1</sup> / 125 - 280 mph <sup>2</sup> (+12.80/-14.80) - (+64.00/-72.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>
	16'	100 - 195 mph <sup>1</sup> / 125 - 240 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>
	18'	100 - 190 mph <sup>1</sup> / 125 - 230 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

## 2 Choose Your Color

### Painted Finishes

(Standard)

  
White

  
Almond

  
Sandstone

  
Terra Bronze

  
Brown

  
Black

### Wood Grain Impressions™ Plank Finishes\*

Stucco embossment. (Available on Flush panel only)


  
Cedar Plank

  
Medium Oak Plank

  
White Plank

  
Beachwood Plank

  
Carbon Oak Plank

  
Black Plank

### Wood Grain Impressions™ Bi-Directional Finishes

Stucco embossment. (Not available on Flush panel)

  
Western Cedar

  
Carbon Oak

  
Medium Oak

\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.



Available with the TruChoice® Color System, Wayne Dalton's custom painting process that offers more than 6,000 colors. See dealer for details.



**CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS. Impact-resistant windows are available. (Miami-Dade Broward approved upgrade).**

### 3 Choose Your Windows



Arched Stockton Long



Cascade Long



Cascade Short



Clear Long\*\*



Clear Short\*\*



Double Narrow\*



Narrow\*



Prairie Long\*\*



Prairie Short\*\*



Sherwood Long



Sherwood Short



Stockbridge Long\*\*  
(3-Lite)



Stockbridge Long\*\*  
(4-Lite)



Stockton Long\*\*  
(4-Lite)



Stockton Long\*\*  
(6-Lite)



Stockton Long\*\*  
(8-Lite)



Stockton Long  
(12-Lite)



Stockton Long  
(8-Lite Arched)



Stockton Short\*\*



Williamsburg Long



Williamsburg Short



Wyndbridge Long



Arched Stockton Long 4 pc



Williamsburg Long 4 pc

Choice of single or double arch is available for arched top double car windows

\*Available for Wood Grain Impressions™ Plank Finishes only.

\*\*Wood Grain Impressions™ Bi-Directional Finishes only available with these windows.

#### WINDOW AVAILABILITY BY DOOR PANEL STYLE

##### SHORT PANEL

Cascade Short  
Clear Short  
Prairie Short  
Sherwood Short  
Stockton Short  
Williamsburg Short  
(4 pc & 8 pc)

##### VERTICAL SHORT PANEL

\*Arched Stockton Long  
Cascade Short & Long  
Clear Short & Long  
Prairie Short & Long  
Sherwood Short & Long  
Stockbridge Long (3-Lite)  
Stockbridge Long (4-Lite)  
Stockton Long (4, 6, 8 & 12-Lite)  
Stockton Long Arch (8-Lite)  
Stockton Short (4-Lite)  
Williamsburg Long (2 pc & 4 pc)  
Wyndbridge Long  
(2 pc, 3 pc, 4 pc & 5 pc)

##### LONG & VERTICAL LONG PANEL

\*Arched Stockton Long  
Cascade Long  
Clear Long  
Prairie Long  
Sherwood Long  
Stockbridge Long (3-Lite)  
Stockbridge Long (4-Lite)  
Stockton Long (4, 6, 8 & 12-Lite)  
Stockton Long Arch (8-Lite)  
Williamsburg Long (2 pc & 4 pc)  
Wyndbridge Long  
(2 pc, 3 pc, 4 pc & 5 pc)

##### FLUSH PANEL

\*Arched Stockton Long  
Cascade Short & Long  
Clear Short & Long  
\*\*Double Narrow  
\*\*Narrow  
Prairie Short & Long  
Sherwood Short & Long  
Stockbridge Long (3-Lite)  
Stockbridge Long (4-Lite)  
Stockton Long (4, 6, 8 & 12-Lite)  
Stockton Long Arch (8-Lite)  
Stockton Short (4-Lite)  
\*Williamsburg Long (2 pc & 4 pc)  
\*Williamsburg Short (4 pc & 8 pc)  
Wyndbridge Long (2 pc, 3 pc & 4 pc)

\*Available in single and double arch.

\*\*Available on Wood Grain Impressions™ Plank finishes with 1/2" clear insulated or impact resistant glass.

#### Window Placement Options (Model 8300AG)

Optional window placements available with Clear Short or Clear Long windows only. Standard window placement (Model 8300) on top or intermediate row only.

#### Vertical Option


(left or right)



Short, Long, Vertical Long and Flush panels.

#### Double Row Option


(top and intermediate)



Short, Long, Vertical Short, Vertical Long and Flush panels.

#### Vertical and Horizontal

(left or right)



Short, Long, Vertical Long and Flush panels.

#### All Window Option



Flush panel.

# MODEL 8500


MODEL 8500AG

# Classic Steel


The Model 8500 is among the most thermally efficient garage doors that we build. Engineered with tongue-and-groove panel joints, this door is durable and stylish.

- Premium steel construction
- U-factor\*  = 0.12
- R-value\*\* = 16.22
- Limited Lifetime Warranty
- Foamed-in-place polyurethane insulation


## 1 Choose Your Style



Short Panel



Long Panel



Vertical Short Panel



Flush Panel

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.

## 2 Choose Your Color

### Painted Finishes (Standard)



White



Almond



Sandstone



Terra Bronze



Brown




Black

### Wood Grain Impressions™ Bi-Directional Finishes

Stucco embossment. (Not available on Flush panel)



Western Cedar



Carbon Oak



Medium Oak



IMPACT



MIAMI-DADE



IMPACT



U-factor of 0.12

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS.

MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8500	9'	100 - 190 mph <sup>1</sup> / 125 - 235 mph <sup>2</sup> (+12.80/-14.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	NO
	16'	105 - 195 mph <sup>1</sup> / 125 - 240 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	NO
	18'	105 - 190 mph <sup>1</sup> / 125 - 235 mph <sup>2</sup> (+12.80/-14.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	NO

\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.



Vertical Short panel, Custom Painted finish, Stockton Long windows

### 3 Choose Your Windows



Arched Stockton Long



Cascade Long



Cascade Short



Clear Long\*\*



Clear Short\*\*



Prairie Long\*\*



Prairie Short\*\*



Sherwood Long



Sherwood Short



Stockbridge Long\*\*  
(3-Lite)



Stockbridge Long\*\*  
(4-Lite)



Stockton Long\*\*  
(4-Lite)



Stockton Long\*\*  
(6-Lite)



Stockton Long\*\*  
(8-Lite)



Stockton Long  
(12-Lite)



Stockton Long  
(8-Lite Arched)



Stockton Short\*\*



Williamsburg Long



Williamsburg Short



Wyndbridge Long



Arched Stockton Long 4 pc



Williamsburg Long 4 pc

*Choice of single or double arch is available for arched top double car windows*

*\*\*Wood Grain Impressions™ Bi-Directional Finishes only available with these windows.*

#### WINDOW AVAILABILITY BY DOOR PANEL STYLE

##### SHORT PANEL

Cascade Short  
Clear Short  
Prairie Short  
Sherwood Short  
Stockton Short  
Williamsburg Short  
(4 pc & 8 pc)

##### VERTICAL SHORT PANEL

\*Arched Stockton Long  
Cascade Short & Long  
Clear Short & Long  
Prairie Short & Long  
Sherwood Short & Long  
Stockbridge Long (3-Lite)  
Stockbridge Long (4-Lite)  
Stockton Long (4, 6, 8 & 12-Lite)  
Stockton Long Arch (8-Lite)  
Stockton Short (4-Lite)  
Williamsburg Long (2 pc & 4 pc)  
Wyndbridge Long  
(2 pc, 3 pc, 4 pc & 5 pc)

##### LONG & VERTICAL LONG PANEL

\*Arched Stockton Long  
Cascade Long  
Clear Long  
Prairie Long  
Sherwood Long  
Stockbridge Long (3-Lite)  
Stockbridge Long (4-Lite)  
Stockton Long (4, 6, 8 & 12-Lite)  
Stockton Long Arch (8-Lite)  
Williamsburg Long (2 pc & 4 pc)  
Wyndbridge Long  
(2 pc, 3 pc, 4 pc & 5 pc)

##### FLUSH PANEL

\*Arched Stockton Long  
Cascade Short & Long  
Clear Short & Long  
Prairie Short & Long  
Sherwood Short & Long  
Stockbridge Long (3-Lite)  
Stockbridge Long (4-Lite)  
Stockton Long (4, 6, 8 & 12-Lite)  
Stockton Long Arch (8-Lite)  
Stockton Short (4-Lite)  
\*Williamsburg Long (2 pc & 4 pc)  
\*Williamsburg Short (4 pc & 8 pc)  
Wyndbridge Long (2 pc, 3 pc & 4 pc)

\*Available in single and double arch.

#### Window Placement Options (Model 8500AG)

Optional window placements available with Clear Short or Clear Long windows only. Standard window placement (Model 8500) on top or intermediate row only.

#### Vertical Option

(left or right)



Short, Long, Vertical Long and Flush panels.

#### Double Row Option

(top and intermediate)



Short, Long, Vertical Short, Vertical Long and Flush panels.

#### Vertical and Horizontal

(left or right)



Short, Long, Vertical Long and Flush panels.

#### All Window Option



Flush panel.

# MODEL 8350

# Classic Steel

Classic Steel Model 8350 metallic finish garage door is the ultimate choice for homeowners looking to make a bold design statement. These premium metallic doors feature insulated steel sandwich construction, providing enhanced thermal efficiency that helps maintain indoor comfort while helping to reduce energy costs.

- Foamed-In-Place Polystyrene Insulation
- U-factor\*  $\frac{1}{R} = 0.15$
- R-value\*\* = 12.12
- Wind Load Options Available
- Heavy Gauge Steel End Caps
- Limited Lifetime Warranty




Microgroove panel, Dark Bronze finish, Clear Long windows


MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8350	9'	110 - 185 mph <sup>1</sup> / 135 - 230 mph <sup>2</sup> (+10.00/-12.00) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup>
	16'	100 - 190 mph <sup>1</sup> / 120 - 230 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup>
	18'	100 - 190 mph <sup>1</sup> / 120 - 230 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

## 1 Panel



Flush Panel




Microgroove Panel

## 2 Choose Your Color

### Modern Metallic Finishes

(Shown on Microgroove panel)



Silver



Dark Bronze



Black Frost



\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

### 3 Choose Your Windows



Clear Long



Clear Short



Double Narrow



Narrow

Not all windows available in all areas. Consult your dealer for details.  
Decorative hardware is available, see your dealer or visit our website at [wayne-dalton.com](http://wayne-dalton.com) for details.

**CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS.**



*Flush panel, Dark Bronze finish, Narrow windows*

# MODELS 8000/8200

# Classic Steel

Style and storm safety don't have to cost a fortune. These models feature Wayne Dalton quality with rugged, tongue-and-groove panels.

- Polystyrene insulation on Model 8200
- R-value\* = 7.4

- 10-Year Limited Warranty




Model 8000, Colonial panel, White finish, Stockton I windows


MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Models 8000/8200	9'	110 - 185 mph <sup>1</sup> / 135 - 230 mph <sup>2</sup> (+10.00/-12.00) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup>
	16'	100 - 190 mph <sup>1</sup> / 120 - 230 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup>
	18'	100 - 190 mph <sup>1</sup> / 120 - 230 mph <sup>2</sup> (+12.40/-13.80) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW <sup>3</sup> / LONG WINDOW <sup>3</sup>	SHORT WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES


## 1 Choose Your Style



Colonial



Ranch



Sonoma

Note: For Colonial and Sonoma style doors with windows, a full row of windows is required.

\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

## 2 Choose Your Color

### Painted Finishes (Standard)



White



Almond



Taupe



Brown



Black



IMPACT



MIAMI-DADE



IMPACT

### 3 Choose Your Windows

For Colonial and Sonoma\* Panels



Cascade I



Clear I



Prairie I



Sherwood I



Stockton I



Arched Stockton



Williamsburg I



Arched Stockton Double (Arch Double Car)

Not all windows available in all areas. Consult your dealer for details.  
Decorative hardware is available, see your dealer or visit our website at [wayne-dalton.com](http://wayne-dalton.com) for details.

**CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS.**




Model 8200, Sonoma panel, Brown finish

# MODEL 9100

# Classic Steel

You don't have to give up high-end quality, styling, performance or safety features to get an affordable, thermally efficient garage door. Model 9100 has all the things you've been looking for.

- Steel panels with distinctive designs
- Foamed-in-place polyurethane insulation
- U-factor\*  = 0.26
- R-value\*\* = 9
- Pinch-resistant door panels
- Limited Lifetime Warranty




Long panel, Black finish, Stockton Long (8-Lite) windows


MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 9100	9'	95 - 185 mph <sup>1</sup> / 120 - 230 mph <sup>2</sup> (+12.70/-14.40) - (+46.00/-52.00)	YES <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>
	16'	100 - 175 mph <sup>1</sup> / 120 - 210 mph <sup>2</sup> (+12.70/-14.40) - (+39.20/-43.70)	YES <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>
	18'	100 - 175 mph <sup>1</sup> / 120 - 210 mph <sup>2</sup> (+12.70/-14.40) - (+39.20/-43.70)	YES <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES


## 1 Choose Your Style




Short Panel




Long Panel



Vertical Short Panel



Vertical Long Panel



Flush Panel

Single-Width doors are available in 8' or 9' widths. Double-width doors are available in 16' or 18' widths. All widths are available in 7' and 8' heights.

†Windows available for the Sonoma Ranch panel for select option codes only

## 2 Choose Your Color

### Painted Finishes (Standard)



White



Almond



Sandstone



Gray



Brown



Black

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.



\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.  
\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

### 3 Choose Your Windows



Arched Stockton Long



Cascade Long



Cascade Short



Clear Long



Clear Short



Prairie Long



Prairie Short



Sherwood Long



Sherwood Short



Stockbridge Long  
(3-Lite)



Stockbridge Long  
(4-Lite)



Stockton Long  
(4-Lite)



Stockton Long  
(6-Lite)



Stockton Long  
(8-Lite)



Stockton Long  
(12-Lite)



Stockton Short



Stockton Long  
(8-Lite Arched)



Williamsburg Long



Williamsburg Short



Wyndbridge Long



Arched Stockton Long 4 pc



Williamsburg Long 4 pc

*Choice of single or double arch is available for arched top double car windows*

#### WINDOW AVAILABILITY BY DOOR PANEL STYLE

##### SHORT & FLUSH PANEL

- \*Arched Stockton Long
- Cascade Short & Long
- Prairie Short & Long
- Sherwood Short & Long
- Stockbridge Long (3-Lite)
- Stockbridge Long (4-Lite)
- Stockton Long (4, 6, 8 & 12-Lite)
- Stockton Long Arch (8-Lite)
- Stockton Short (4-Lite)
- \*Williamsburg Long (2 pc & 4 pc)
- \*Williamsburg Short (4 pc & 8 pc)
- Wyndbridge Long (2 pc, 3 pc & 4 pc)

##### VERTICAL SHORT PANEL

- \*Arched Stockton Long
- Cascade Short & Long
- Clear Short & Long
- Prairie Short & Long
- Sherwood Short & Long
- Stockbridge Long (3-Lite)
- Stockbridge Long (4-Lite)
- Stockton Long (4, 6, 8 & 12-Lite)
- Stockton Long Arch (8-Lite)
- Stockton Short (4-Lite)
- Williamsburg Long (2 pc & 4 pc)
- Wyndbridge Long (2 pc, 3 pc & 4 pc)

##### LONG & VERTICAL LONG PANEL

- \*Arched Stockton Long
- Cascade Long
- Clear Long
- Prairie Long
- Sherwood Long
- Stockbridge Long (3-Lite)
- Stockbridge Long (4-Lite)
- Stockton Long (4, 6, 8 & 12-Lite)
- Stockton Long Arch (8-Lite)
- Williamsburg Long (2 pc & 4 pc)
- Wyndbridge Long (2 pc, 3 pc & 4 pc)




\*Available in single and double arch.

# MODEL 9605

# Classic Steel

The Wayne Dalton Model 9605 garage door delivers greater thermal efficiency with premium detailing. The styling options of this distinctive, stylish door make it a popular choice for contemporary home architecture.

- Steel panels with distinctive designs
- Foamed-in-place polyurethane insulation
- U-factor\*  = 0.26
- R-value\*\* = 9

- Pinch-resistant door panels
- Limited Lifetime Warranty




*Flush panel, White finish, Clear Long Vertical windows*


MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 9605	9'	100 - 160 mph <sup>1</sup> / 130 - 205 mph <sup>2</sup> (+15.90/-18.20) - (+41.00/-46.30)	YES <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>
	16'	100 - 160 mph <sup>1</sup> / 125 - 205 mph <sup>2</sup> (+15.30/-17.00) - (+39.20/-43.70)	YES <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>
	18'	100 - 160 mph <sup>1</sup> / 125 - 205 mph <sup>2</sup> (+15.30/-17.00) - (+39.20/-43.70)	YES <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>	SHORT WINDOW/ LONG WINDOW <sup>3</sup>

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES


## 1 Choose Your Style




Short Panel




Long Panel



Vertical Short



Vertical Long Panel



Flush Panel

Single-width doors are available in 8' or 9' widths. Double-width doors are available in 16' or 18' widths. All widths are available in 7' and 8' heights.

†Windows available for the Sonoma Ranch panel for select option codes only

## 2 Choose Your Color

### Painted Finishes (Standard)



White



Almond



Sandstone



Gray



Brown



Black

### Premium Finish



Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.



\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.  
\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

### 3 Choose Your Windows



Arched Stockton Long



Cascade Long



Cascade Short



Clear Long



Clear Short



Prairie Long



Prairie Short



Sherwood Long



Sherwood Short



Stockbridge Long  
(3-Lite)



Stockbridge Long  
(4-Lite)



Stockton Long  
(4-Lite)



Stockton Long  
(6-Lite)



Stockton Long  
(8-Lite)



Stockton Long  
(12-Lite)



Stockton Short




Stockton Long  
(8-Lite Arched)



Williamsburg Long



Williamsburg Short



Wyndbridge Long



Arched Stockton Long 4 pc



Williamsburg Long 4 pc

*Choice of single or double arch is available for arched top double car windows*

#### WINDOW AVAILABILITY BY DOOR PANEL STYLE

##### SHORT & FLUSH PANEL

- \*Arched Stockton Long
- Cascade Short & Long
- Clear Short & Long
- Prairie Short & Long
- Sherwood Short & Long
- Stockbridge Long (3-Lite)
- Stockbridge Long (4-Lite)
- Stockton Long (4, 6, 8 & 12-Lite)
- Stockton Long Arch (8-Lite)
- Stockton Short (4-Lite)
- \*Williamsburg Long (2 pc & 4 pc)
- \*Williamsburg Short (4 pc & 8 pc)
- Wyndbridge Long (2 pc, 3 pc & 4 pc)

##### VERTICAL SHORT PANEL

- \*Arched Stockton Long
- Cascade Short & Long
- Clear Short & Long
- Prairie Short & Long
- Sherwood Short & Long
- Stockbridge Long (3-Lite)
- Stockbridge Long (4-Lite)
- Stockton Long (4, 6, 8 & 12-Lite)
- Stockton Long Arch (8-Lite)
- Stockton Short (4-Lite)
- Williamsburg Long (2 pc & 4 pc)
- Wyndbridge Long (2 pc, 3 pc & 4 pc)

##### LONG & VERTICAL LONG PANEL

- \*Arched Stockton Long
- Cascade Long
- Clear Long
- Prairie Long
- Sherwood Long
- Stockbridge Long (3-Lite)
- Stockbridge Long (4-Lite)
- Stockton Long (4, 6, 8 & 12-Lite)
- Stockton Long Arch (8-Lite)
- Williamsburg Long (2 pc & 4 pc)
- Wyndbridge Long (2 pc, 3 pc & 4 pc)


\*Available in single and double arch.



# MODEL 9405

# Carriage House Steel

There's no need to sacrifice performance to get the look of an elegant carriage house style door. The Model 9405 offers thermal efficiency and easy maintenance in six different designs.

- Pinch-resistant door panels
- U-factor\*  = 0.27
- R-value\*\* = 10


- Limited Lifetime Warranty
- Foamed-in-place polyurethane insulation



MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 9405	9'	95 - 185 mph <sup>1</sup> / 120 - 230 mph <sup>2</sup> (+12.70/-14.40) - (+46.00/-52.00)	YES <sup>3</sup>	LONG WINDOW <sup>3</sup>	LONG WINDOW <sup>3</sup>
	16'	100 - 175 mph <sup>1</sup> / 120 - 210 mph <sup>2</sup> (+12.70/-14.40) - (+39.20/-43.70)	YES <sup>3</sup>	LONG WINDOW <sup>3</sup>	LONG WINDOW <sup>3</sup>
	18'	100 - 175 mph <sup>1</sup> / 120 - 210 mph <sup>2</sup> (+12.70/-14.40) - (+39.20/-43.70)	YES <sup>3</sup>	LONG WINDOW <sup>3</sup>	NO

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

## 1 Choose Your Style

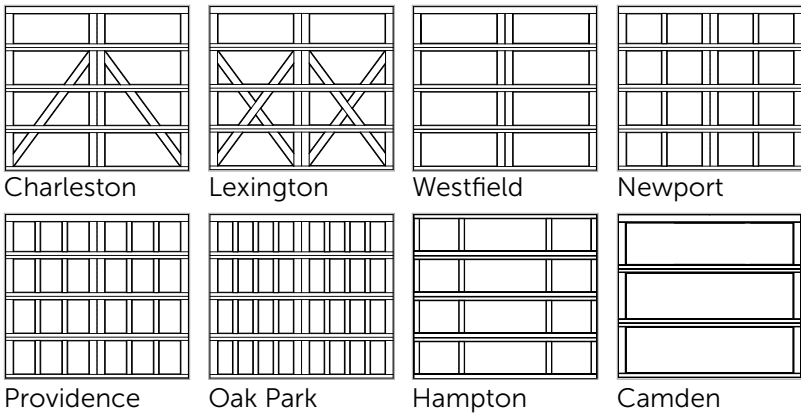

Single-car doors are available in 8' or 9' widths. Double-car are available in 16' or 18' widths. All widths are available in 7' and 8' heights. Double-car designs look like two single-car doors side by side, with the exception of Hampton and Camden designs. See Dealer for details.

\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.  
 \*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

## 2 Choose Your Color

### Painted Finishes



### Two-Toned Painted Finishes



**Premium Finish**



Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.



### 3 Choose Your Windows



Cascade III



Clear II



Stockbridge



Stockton III



Arched Stockton

Choice of single or double arch is available for arched top double-car windows.



Arched Stockton Single



Arched Stockton Double

**CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS.**



*Providence panel, Almond finish, Stockbridge windows, Decorative hardware*

# MODEL 8855

# Contemporary Aluminum

Model 8855 features contemporary styling and wind load protection in a modern aluminum full view door. Available in a wide variety of finish colors to add style and curb appeal to any home.

- Wind Load Protection
- U-factor\*  $\checkmark = 0.30$ ; with Low E Insulated Glass the U-factor is 0.28
- Built to Meet Local Building Codes

- Reinforcement Struts
- 1-Year Limited Warranty
- Polycarbonate Glazing Options




Black powder coated, Bronze tinted glass

MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8855	10' 2"	180 mph <sup>1</sup> / 220 mph <sup>2</sup> (+50.00/-50.00)	NO	YES	NO
	14' 2"	160 mph <sup>1</sup> / 195 mph <sup>2</sup> (+37.00/-37.00)	NO	YES	NO
	16' 2"	145 mph <sup>1</sup> / 180 mph <sup>2</sup> (+31.00/-31.00)	NO <sup>3</sup>	YES	NO
	18' 2"	135 mph <sup>1</sup> / 165 mph <sup>2</sup> (+26.00/-26.00)	NO	YES	NO
	20' 2"	125 mph <sup>1</sup> / 150 mph <sup>2</sup> (+22.00/-22.00)	NO	YES	NO
	22' 2"	115 mph <sup>1</sup> / 135 mph <sup>2</sup> (+18.00/-18.00)	NO	YES	NO
	16' 2"	195 mph <sup>1</sup> / 235 mph <sup>2</sup> (+48.00/-54.00)	YES	NO	YES
	18' 2"	185 mph <sup>1</sup> / 225 mph <sup>2</sup> (+43.00/-48.00)	YES	NO	YES

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

## 1 Style



- Wide, heavy-duty rails and stiles
- An array of frame finishes and special custom options
- Door sizes up to 20'2" wide by 20'1" high†
- Impact rating on doors up to 18'2" wide
- Joint seal between sections for additional weather-resistance
- Optional polyurethane insulation for rails and stiles up to 18'2" wide

† Section height varies dependent on door height.

\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

## 2 Choose Your Color

### Anodized Finishes



Actual door colors may vary from brochure photos due to fluctuations in the printing process. Always request a color sample from your Wayne Dalton Dealer for accurate color matching.

### RAL Powder Coat Finishes

Select from approximately 200 powder coat color options to best match your home.



### 3 Choose Your Glass

#### Glass Options



Clear\*\*  
(Standard)



Obscure



Satin Etched



Gray Tint



Green Tint



Bronze Tint



White Laminated

#### Glass Alternatives

- Clear Lexan® Polycarbonate\*\* – shatter resistant
- Plexiglas® Acrylic\*\* – shatter resistant
- Impact Clear and Frosted Polycarbonate – 0.250" minimum

#### Additional Specialty Glass Options

- Low E Glass\*\* – thermal efficiency
- Tempered Glass – enhanced safety

#### Impact Option

Get the same light infiltration and curb appeal with an impact-rated design

- Impact design with pressures of +48/-54 psf
- Polycarbonate glazing is lighter than glass and meets Florida Building Code impact designs approvals up to 18'2" wide and 20'1" high
- Design includes reinforcement struts for added protection without protruding into the vision panels

Actual glass may vary from brochure photos due to fluctuations in the printing process. Check with your Wayne Dalton Dealer to view a glass sample.

\*\*Insulated options available.




Clear anodized finish, Impact Frosted Polycarbonate glass

# MODEL 8700

# Specialty Vinyl

The vinyl surface stands up to storm driven projectiles, hail and sand. The color goes all the way through so scrapes or scratches are less visible. UV blockers resist sun fade.

- UV-resistant vinyl construction
- Foamed-in-place polyurethane insulation
- U-factor\*  = 0.24
- R-value\*\* = 11.75

- Deep textured maintenance-free coastal door
- 15-Year Limited Warranty





Sonoma panel, Cape Cod Gray finish, Williamsburg I windows

MODEL	DOOR WIDTH UP TO	WIND SPEED / DESIGN PRESSURE MPH <sup>1</sup> / MPH <sup>2</sup> / PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE	
				STANDARD	IMPACT
Model 8700	9'	130 - 175 mph <sup>1</sup> / 160 - 220 mph <sup>2</sup> (+22.90/-26.30) - (+41.60/-46.30)	NO	SHORT WINDOW	NO
	16'	135 - 185 mph <sup>1</sup> / 165 - 225 mph <sup>2</sup> (+23.00/-25.00) - (+43.40/-48.40)	NO	SHORT WINDOW <sup>3</sup>	NO
	18'	120 - 175 mph <sup>1</sup> / 150 - 215 mph <sup>2</sup> (+18.50/-20.70) - (+39.20/-43.70)	NO	SHORT WINDOW <sup>3</sup>	NO

SEE PAGE 27 FOR WIND SPEED / DESIGN PRESSURE NOTES

## 1 Choose Your Style



Colonial

Sonoma

\*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

## 2 Choose Your Color



Glacier White



Adobe Cream



Monterey Sand



Cape Cod Gray

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.



### 3 Choose Your Windows



Stockton I



Williamsburg I

Choice of single or double arch is available for arched top double car windows



Williamsburg 4 piece



Williamsburg 8 piece

**CONTACT YOUR DEALER TO DETERMINE WINDOW AVAILABILITY AND YOUR LOCAL BUILDING OFFICIAL FOR CODE REQUIREMENTS.**



*Colonial Panel, Glacier white finish, Stockton I windows*

## Storm Panels

Fabric-Shield® Storm Panels are a highly-effective alternative to steel or aluminum hurricane panels. These PVC coated woven fabric panels were tested and comply with the performance requirements of specification standards ASTM E-1886\*, ASTM E-1996\* and ASTM E-330\*. Fabric-Shield® panels are easily stored and easier to deploy. Panels are also translucent allowing diffused light to enter.

\*Refer to page 2 for listing of approvals.



Fabric Shield®



## Pull-Down Shutters

Pull-down Shutters use Fabric-Shield® PVC-coated woven fabric in an easy-to-deploy pull down system. The low-profile shutter canisters contain each shutter when they are not in use. The pull-down shutter system is simply the fastest way to make your home storm ready.

Find more information at [wayne-dalton.com/fabric-shield-storm-protection](http://wayne-dalton.com/fabric-shield-storm-protection)



# Wind Speed / Design Pressure Notes

1. Wind Speed based on ASCE 7-22 has 3-Second Peak gusts, using **Exposure C**, for single or double story structures. Assumptions: Mean roof height of 25 ft, flat ground, at sea level, enclosed building and roof angle  $>10^\circ$ . The Wind Speed Calculation is based on the max width of the door and a max height of 8-7 ft depending on the section heights. If a narrower, or taller door is used instead of the max shown in the chart, the wind speed rating may be different. The wind speeds are listed as a guide only. Wind speed is only one of many factors that determine the design pressure on a structure. The design and location for the structure can have a great effect on the loads placed on the garage door. Consult a registered architect or structural engineer to determine what design pressure is appropriate for your application.
2. Wind Speed based on ASCE 7-22 has 3-Second Peak gusts, using **Exposure B**, for single or double story structures. Assumptions: Mean roof height of 25 ft, flat ground, at sea level, enclosed building and roof angle  $>10^\circ$ . The Wind Speed Calculation is based on the max width of the door and a max height of 8-7 ft depending on the section heights. If a narrower, or taller door is used instead of the max shown in the chart, the wind speed rating may be different. The wind speeds are listed as a guide only. Wind speed is only one of many factors that determine the design pressure on a structure. The design and location for the structure can have a great effect on the loads placed on the garage door. Consult a registered architect or structural engineer to determine what design pressure is appropriate for your application.
3. Options available on select styles.
  - Wind load drawings available upon request.
  - Wind speeds listed in this guide are provided for reference purposes only.In **ALL** cases the local building authority is the sole and final determiner of the structural and safety requirements, and suitability of the garage door.




Model 8600, Arlington panel, Black/White finish, Somerton windows

BEFORE



AFTER

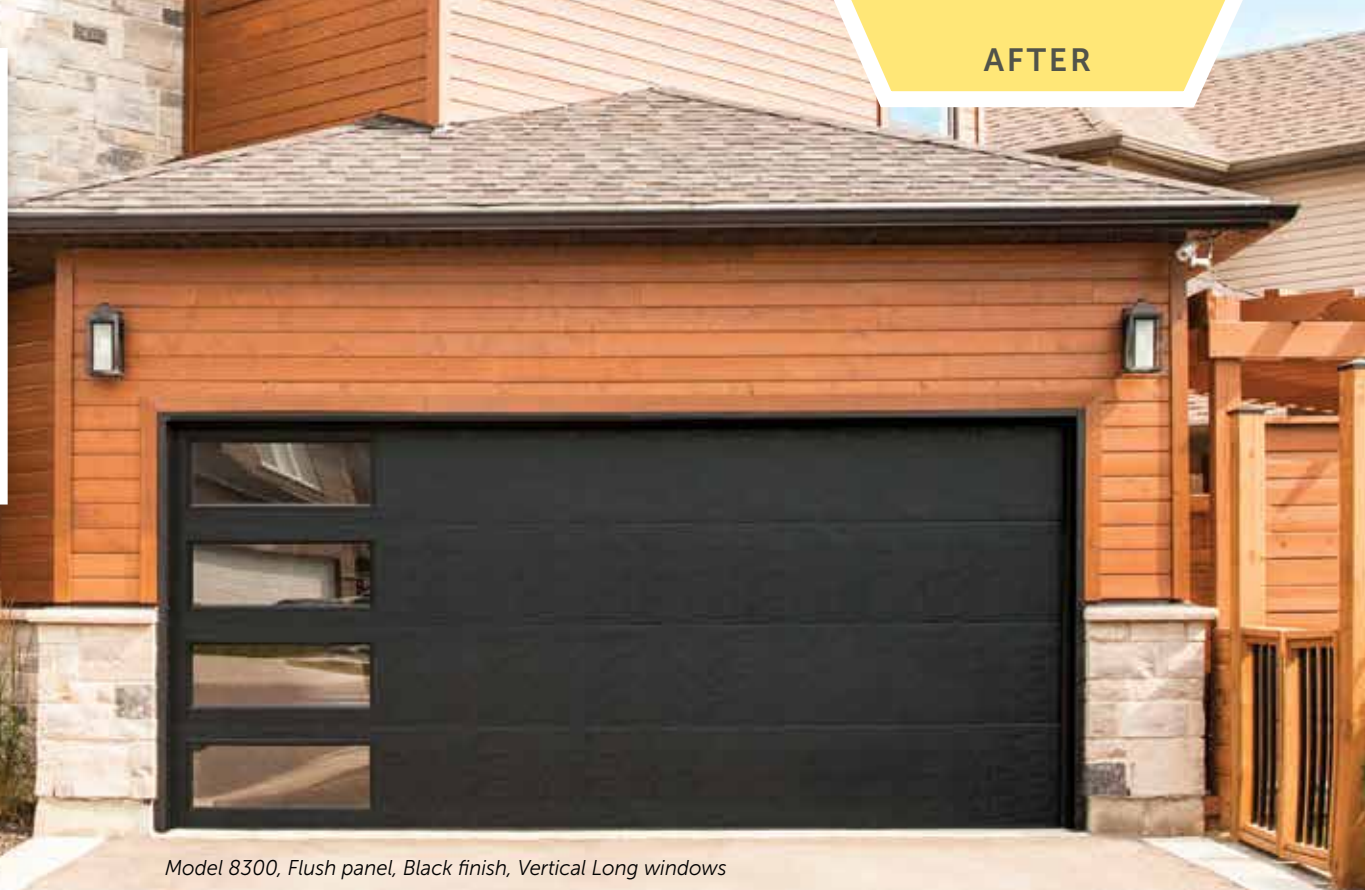

Model 8300, Flush panel, Black finish, Vertical Long windows



# Garage Door Design Center

To see this door on your home, visit [wayne-dalton.com](http://wayne-dalton.com), or download our Garage Door Design Center app. Upload a photo of your home and experiment with panel designs, color options, window styles and decorative hardware designs. Instant curb appeal awaits you with just a click of your mouse.

## THERMAL PERFORMANCE

# Wayne Dalton

2501 S. State Hwy. 121 Bus., Ste 200  
Lewisville, TX 75067

[wayne-dalton.com](http://wayne-dalton.com)



Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.