



Garage Door Buying Guide



Preparing For Your Visit

- Measure your garage door space - see page 5
- Decide on insulated or non-insulated door - see page 4

INSULATED



NON-INSULATED



1 Confirm Available Models

CONSULT THE COMPARISON GUIDE AT THE WAYNE DALTON KIOSK AT YOUR LOCAL LOWE'S STORE.

Styles		
CLASSIC	MODERN	FARMHOUSE
MODELS 8000/9100/9605	MODELS 8300/8500/8350	MODELS 9405/8600

Colors		
WHITE	ALMOND	SANDSTONE
TERRA BRONZE	GRAY	BROWN
BLACK	CLAY	WHITE/GRAY
WHITE/GREEN	WHITE/CLAY	CARBON OAK
MEDIUM OAK	WESTERN CEDAR	CEDAR PLANK
MEDIUM OAK PLANK	BEACHWOOD PLANK	CARBON OAK PLANK
WHITE PLANK	BLACK PLANK	SILVER
DARK BRONZE	BLACK FROST	

Comparison Guide — Residential Garage Doors								
	GOOD		BETTER		BEST			
	MODEL 8000	MODEL 9100	MODEL 9405	MODEL 9605	MODEL 8300	MODEL 8350	MODEL 8500	MODEL 8600
Style	Classic	Classic	Farmhouse	Classic	Modern	Modern	Modern	Farmhouse
Construction	Steel	Steel/Insulation/ ToughGard™	Overlay/Steel/ Insulation/Steel	Steel/ Insulation/ Steel	Steel/Insulation/ Steel	Steel/ Insulation/ Steel	Steel/ Insulation/ Steel	Wood Overlay/Steel/ Insulation/Steel
Insulation	N/A	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane
U-factor*	N/A	0.25	0.27	0.26	0.15	.15	0.12	0.13
R-value**	N/A	9	10	10	12.12	12.12	16.22	12.12
TorqueMaster® Plus	•	•	•	•				
Joint Type	Tongue-and-Groove	Pinch-Resistant	Pinch-Resistant	Pinch-Resistant	Tongue-and-Groove	Tongue-and-Groove	Tongue-and-Groove	Tongue-and-Groove
WindSafe® Options	•	•	•	•	•	•	•	•
Impact Options		•	•	•	•	•	•	•
Warranty	10-Year Limited	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
Price Point	\$	\$	\$	\$	\$	\$	\$	\$
Section Thickness	2"	1+ Integrated Strut	1-1/4" Integrated Strut	1-1/4" Integrated Strut	1-3/8"	1-3/8"	2"	1-3/8" + Overlay
Width (Min/Max)	8'/18'	6'/18'	8'/18'	6'/18'	5'/20'	5'/20'	5'/20'	8'/18'
Height (Min/Max)	7'/9'	6'/9'	7'/12'	6'/12'	6'/12'	6'/12'	6'/12'	6' 6'/9'
COLORS AVAILABLE								
White	•	•	•	•	•	•	•	•
Almond	•	•	•	•	•	•	•	•
Sandstone	•	•		•	•		•	•
Terra Bronze					•		•	•
Gray		•	•	•				
Brown	•	•	•	•	•		•	•
Black	•	•		•	•			•
Clay			•					
White/Gray			•					
White/Green			•					
White/Clay			•					
Carbon Oak					•		•	
Medium Oak					•		•	
Western Cedar					•		•	
Cedar Plank					•			
Medium Oak Plank					•			
Beachwood Plank					•			
Carbon Oak Plank					•			
White Plank					•			
Black Plank					•			
Silver					•			
Dark Bronze						•		
Black Frost						•		

2 Choose Your Style

CLASSIC



MODERN



FARMHOUSE



3 Design Your Door

CHOOSE YOUR COLOR



CHOOSE A PANEL DESIGN



CHOOSE YOUR WINDOWS



4 Confirm Design and Installation Method

PROFESSIONAL INSTALLATION



DIY DELIVERY



A new garage door not only improves your home's curb appeal, it functions as one of your home's most used entry points. Made with care and quality, Wayne Dalton® garage doors offer a variety of performance and safety features.




Warranty

All Wayne Dalton garage doors are made with superior materials and come with a Limited Warranty.



Insulation

An insulated garage door can help in controlling the temperature in your garage space. The effectiveness of insulation is expressed in either as a U-factor*  or an R-value**. The lower the U-factor or higher the R-value, the better the insulation in the door.

Polyurethane Insulation – Foamed-in-place polyurethane insulation delivers twice the thermal performance of polystyrene insulation, as well as adds strength to the door and helps dampen sound transmission. U-factors range from 0.12 to 0.28 and R-values range from 9 to 16.22.



Pinch-Resistant Panels

Select Wayne Dalton models feature pinch-resistant panels, designed to push fingers out of harm's way if accidentally placed near a closing door.



Tight Tongue-and-Groove Joint Seals

Select Wayne Dalton models include snug-fitting tongue-and-groove joint seals that help reduce wind and weather from entering the garage.



TorqueMaster® Plus Counterbalance System

Wayne Dalton's exclusive counterbalance system safely and cleanly contains the garage door springs inside a steel tube. The TorqueMaster® Plus is designed to provide a safeguard against damage or injury that could result from the accidental release of spring tension and features an anti-drop safety device.



Bottom Weather Seal

All Wayne Dalton garage doors feature a vinyl bottom weather seal to help keep drafts and debris from entering the garage.



WindSafe® Wind Load Options

Most Wayne Dalton garage doors offer wind load options that comply with one or more of the following agencies: Florida Building Code, Texas Department of Insurance and Miami-Dade County (FL).



Impact Wind Load Options

Select Wayne Dalton garage doors have been approved for impact resistance. Tests show these doors are capable of stopping the direct impact of a 9 lb. 2x4 board at 50 ft. per second.

*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

**Wayne Dalton uses a calculated door section R-value for our insulated doors.

How to Measure For Your Wayne Dalton Garage Door

A WIDTH _____

Exact finished opening width – should equal the same size as the existing door

B HEIGHT _____

Exact finished opening height – should equal the same size as the existing door

C SIDE ROOM _____


Distance from the edge of the door opening to any wall or obstruction

D HEADROOM _____

Distance from the top of the finished existing door opening to the ceiling or underside of joists

E ROOM DEPTH _____

Distance from the finished door opening to the back point where hardware or the opener will extend

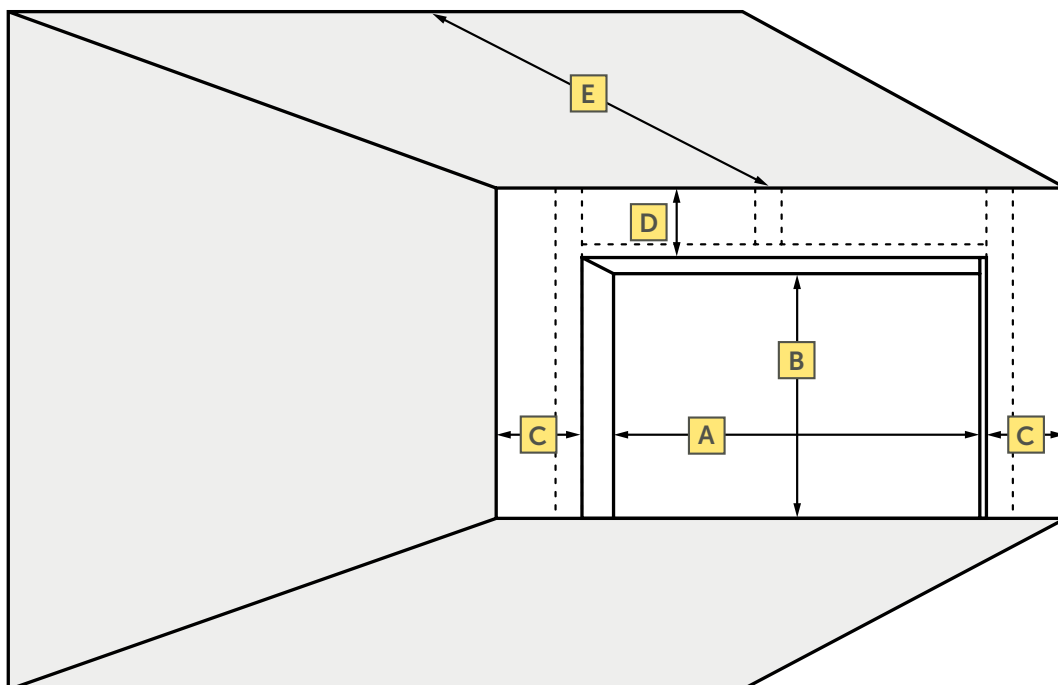

Severe storm defense

During a hurricane or severe storm, the structural integrity of your home can be compromised if wind forces cause the garage door to buckle. Help protect your home against the damaging effects of wind pressure during severe weather events with a wind-resistant garage door from Wayne Dalton.

Approval Agencies / Building Codes

DOOR MODELS	8600	8300	8350	8500	8000	9100	9605	9405
International Building Code (IBC) and International Residential Code (IRC)	•	•	•	•	•	•	•	•
Florida Building Code (FBC)	•	•	•	•	•	•	•	•
Florida Building Code (FBC) - Impact Rated	•	•	•	•	•	•	•	•
Texas Department of Insurance (TDI)	•	•	•	•	•	•	•	•
Texas Department of Insurance (TDI) - Impact Rated	•	•	•	•	•	•	•	•
Miami-Dade County approved	•	•	•	•				


All wind load options must be specified at time of order.



Wind load-rated garage doors




Wayne Dalton offers wind load reinforcement options with many of its most popular garage doors. Doors with the WindSafe logo comply with requirements of one or more approval agencies, including: the Florida Building Code, Texas Department of Insurance and Miami-Dade (FL) County.

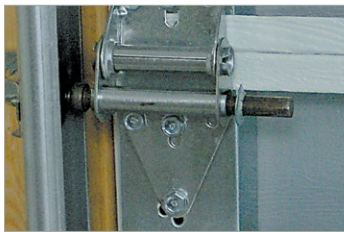

High-grade carbon steel hinges add stability.



A combination of quick install and heavy duty jamb brackets secure track to door frame.

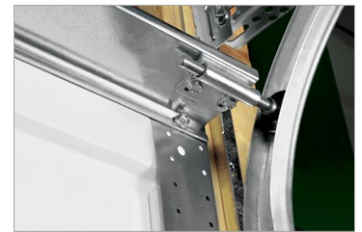

Top section roller slide attached to U-bar resists inward and outward force.



3" commercial grade U-bars provide horizontal stability.



Bottom section roller slide attached to U-bar resists inward and outward force.

Impact-rated garage doors



Wayne Dalton door models with the impact logo have been approved for impact resistance. Always consult with your local building authority to ensure compliance with local building code requirements.

Lose the garage door, lose the home

Post-storm analysis indicates that 80% of residential hurricane damage begins with wind entry into the garage.¹ If the integrity of your home is compromised, wind, rain and blown debris have easy access into your home.

3

With wind speeds exceeding 111 mph (Category 3 or greater hurricane), the extraordinary pressure inside the home can compromise the structural integrity of walls and roof.

4

Induced internal air pressure can reach such a magnitude that it can literally blow off the roof and tear apart wall panels.

5


Window openings as small as 4 square feet can pressurize the home's interior, exerting forces on the structure like a turbine engine.

2

Debris driven by high velocity hurricane winds become powerful projectiles that can pierce ordinary garage doors breaching their integrity.

1

High wind events can cause un-reinforced garage doors to buckle, forcing the door out of the track and causing catastrophic door failure.

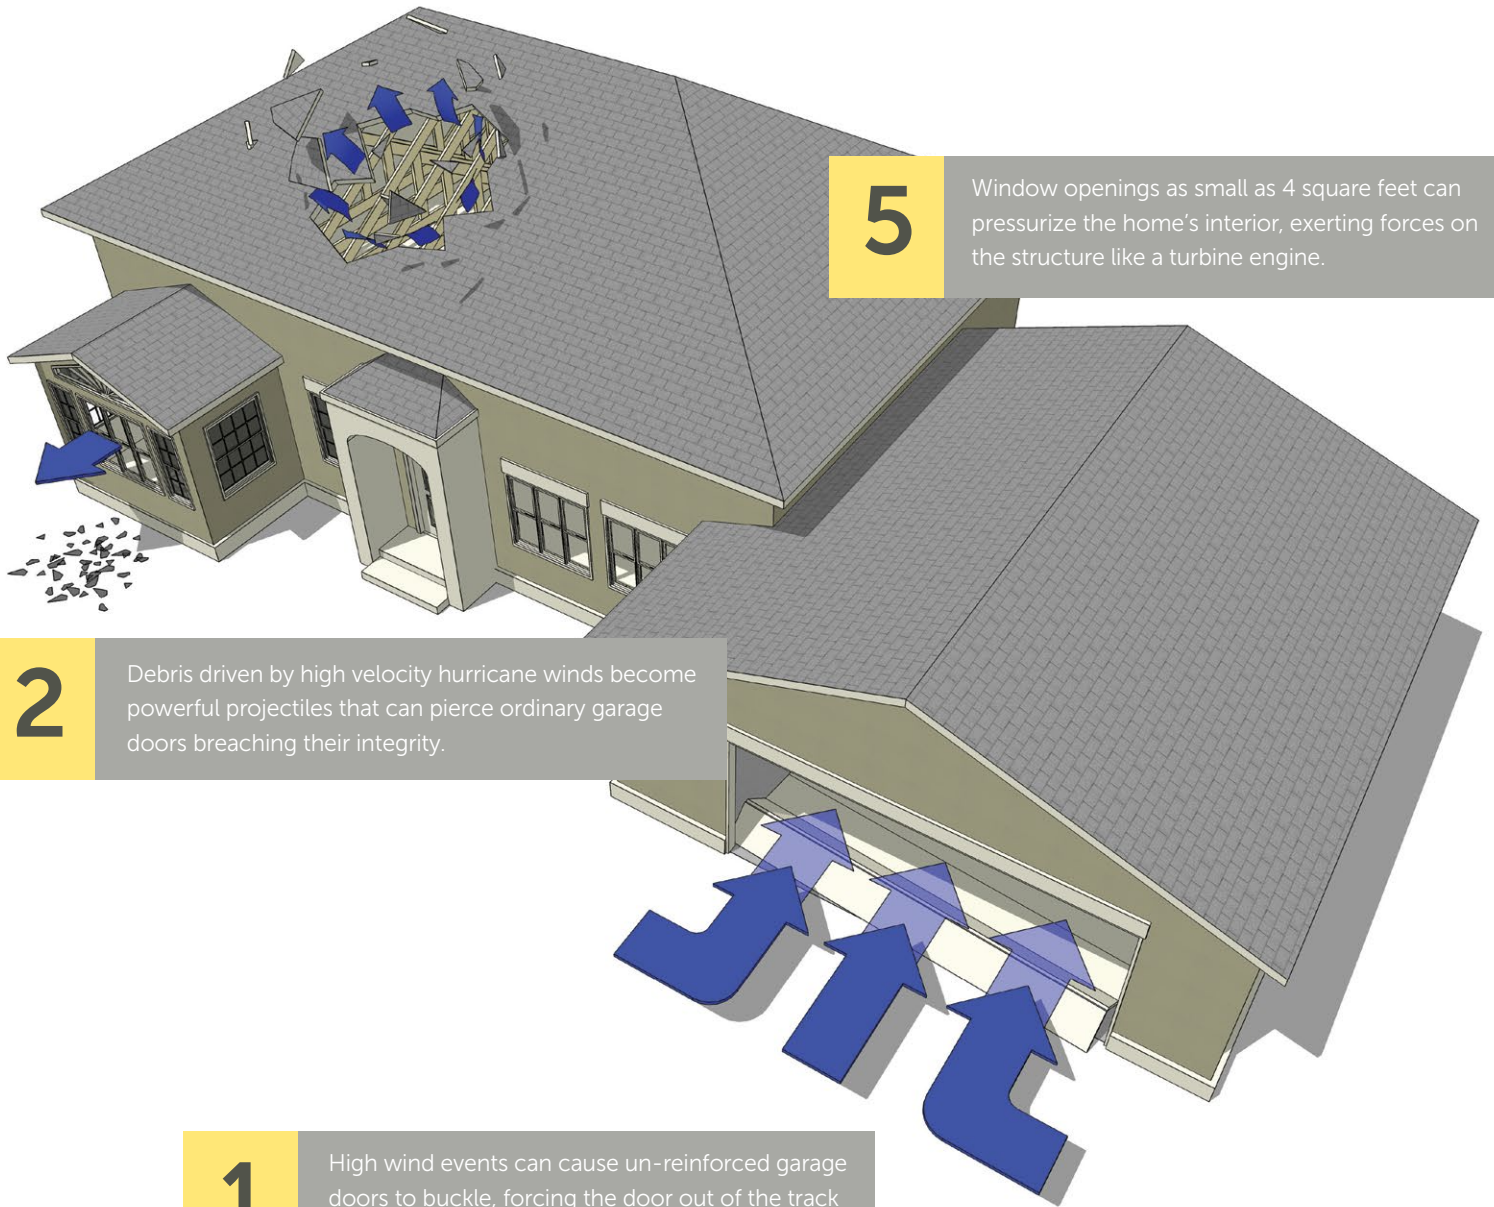

¹Federal Alliance for Safe Homes (FLASH)[®] 2014.

Classic Steel

Traditional Style

These timeless garage door designs coordinate with any style of home and are available in an assortment of trendy colors and window options. From uninsulated, one-layer construction to our most thermally efficient garage door, the Classic Steel Collection offers a door for every budget and home.




Model 9605, Flush panel, White finish, Clear Long Vertical windows



Model 8000, Colonial panel, White finish, Stockton I windows



Model 9100, Vertical Short panel, Almond finish, Decorative hardware

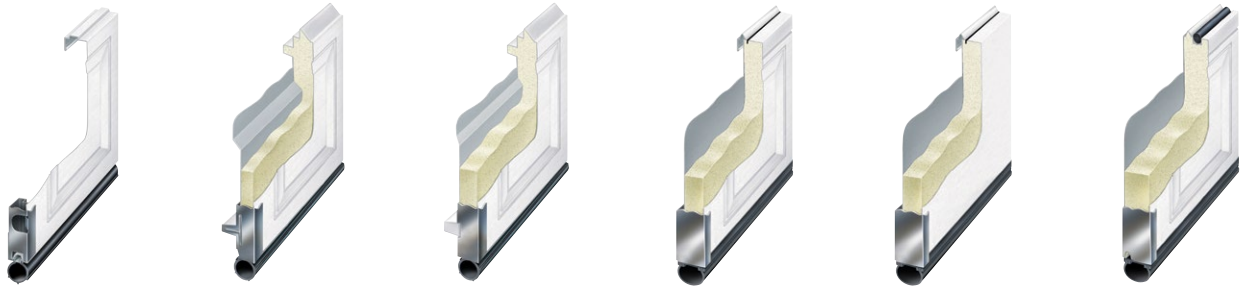

	GOOD		BETTER		BEST	
	MODEL 8000	MODEL 9100	MODEL 9605	MODEL 8300	MODEL 8350	MODEL 8500
Construction	Steel	Steel/Insulation/ ToughGard™ backer	Steel/Insulation/ Steel	Steel/Insulation/ Steel	Steel/Insulation/ Steel	Steel/Insulation/ Steel
Insulation	N/A	Polyurethane U-factor*: 0.26 R-value**: 9	Polyurethane U-factor*: 0.26 R-value**: 10†	Polyurethane U-factor*: 0.15 R-value**: 12.12	Polyurethane U-factor*: 0.15 R-value**: 12.12	Polyurethane U-factor*: 0.12 R-value**: 16.22
TorqueMaster® Plus	•	•	•			
Joint Type	Tongue-and-Groove	Pinch-Resistant	Pinch-Resistant	Tongue-and-Groove	Tongue-and-Groove	Tongue-and-Groove
WindSafe® Options	•	•	•	•	•	•
Impact Options		•	•	•	•	•
Warranty	10-Year Limited	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime

*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.
 **Wayne Dalton uses a calculated door section R-value for our insulated doors.
 †R-value = 10 at 8' high. R-value may differ slightly for other heights.

MODEL

8000




Model 8000, Colonial panel, Taupe finish, Cascade I windows




Model 8000, Colonial panel, White finish, Clear I windows

1 Choose Your Style



Colonial



Sonoma

2 Choose Your Color

Painted Finishes



White



Almond



Taupe



Brown



Black

3 Choose Your Windows



Clear I



Clear II



Stockbridge II



Stockton I



Stockton II



Arched Stockton

Not all available window options shown. Window configuration may vary depending on door size. See Lowe's associate for a complete window selection.

9100/9605




Model 9100, Vertical Short panel, White finish, Stockton Long-8-Lite windows, Decorative hardware




Model 9605, Long panel, Black finish, Stockton Long-8-Lite windows


1 Choose Your Style




Short




Long



Vertical/Short



Vertical/Long



Flush

2 Choose Your Color

Painted Finishes



White




Almond



Sandstone



Gray



Brown



Black

3 Choose Your Windows



Clear Long



Clear Short



Stockbridge Long (3-Lite)



Stockton Long (8-Lite)

Not all available window options shown. Window configuration may vary depending on door size.

See Lowe's associate for a complete window selection.




Model 9100, Vertical Short panel, Black finish, Stockton Long-8-Lite windows

8300/8500




Model 8300, Flush panel, Beachwood Plank Wood Grain Impressions™ finish, Clear Long windows


1 Choose Your Style




Short




Long



Vertical/Short



Vertical/Long



Flush

3 Choose Your Windows

Wood Grain Impressions™ Plank Finishes and Paint Finishes



Clear Long



Clear Short



Double Narrow




Stockbridge Long (3-Lite)

*Not all available window options shown.
Window configuration may vary depending on door size.
See Lowe's associate for a complete window selection.*

2 Choose Your Color

Painted Finishes (Standard)




White



Almond



Sandstone



Terra Bronze



Brown



Black

Wood Grain Impressions™ Plank Finishes — Stucco embossment (Available on Models 8300/8300AG Flush panel only)



Cedar Plank




Medium Oak Plank




Beachwood Plank



Carbon Oak Plank



White Plank



Black Plank

Wood Grain Impressions™ Bi-Directional Finishes — Stucco embossment (Not available on Flush panel)



Western Cedar



Carbon Oak



Medium Oak

MODEL

8350




Flush panel, Dark Bronze finish, Clear Short windows



Flush panel, Dark Bronze finish, Double Narrow windows

1 Panel



Flush Panel

2 Choose Your Color

Modern Metallic Finishes



Silver



Dark Bronze



Black Frost

3 Choose Your Windows



Clear Long



Clear Short



Double Narrow



Narrow

Optional Window Placement


Vertical Option
(left or right)




Vertical and Horizontal
(left or right)



Double Row Option
(top and intermediate)



All Window Option




Flush panel, Silver finish, Double Narrow windows

Carriage House Steel

Old World Charm

Inspired by vintage barns, our Carriage House Steel Collection has an old-world look that will make any home the envy of the neighborhood. These doors are fully insulated with foamed-in-place polyurethane insulation and three-layer construction for thermal efficiency.



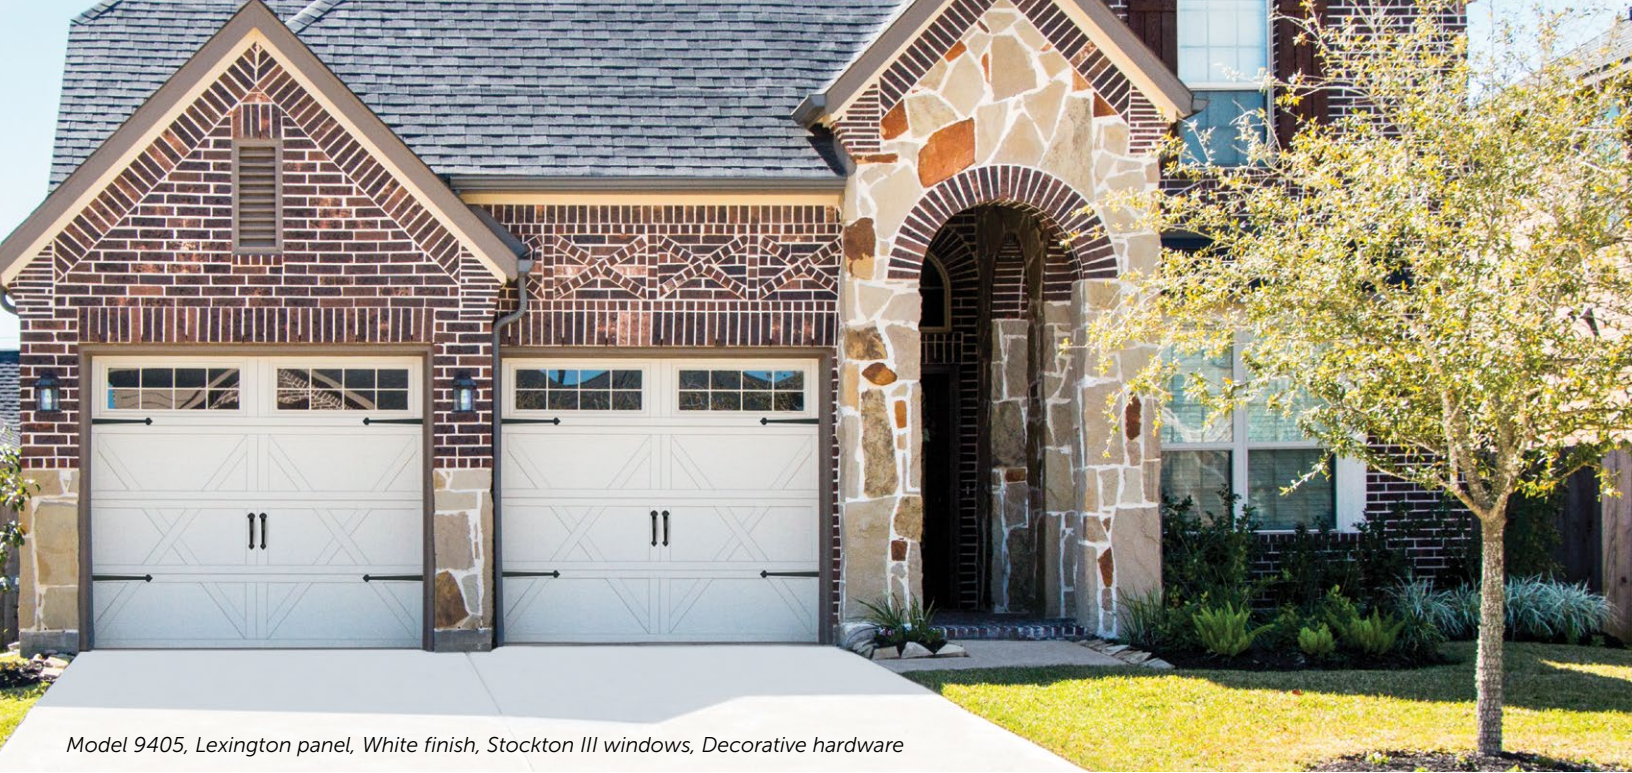

Model 9405, Lexington panel, White finish, Stockton III windows, Decorative hardware



Model 8600, Bellview panel, Brown-White finish, Decorative hardware

	GOOD	BETTER
	MODEL 9405	MODEL 8600
Construction	Overlay/Steel/Insulation/Steel	Wood Overlay/Steel/Insulation/Steel
Insulation	Polyurethane U-factor*: 0.27 R-value**: 10	Polyurethane U-factor*: 0.15 R-value**: 12.12
TorqueMaster® Plus	•	
Joint Type	Pinch-Resistant	Tongue-and-Groove
WindSafe® Options	•	•
Impact Options	•	•
Warranty	Limited Lifetime	Limited Lifetime

*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

**Wayne Dalton uses a calculated door section R-value for our insulated doors.

†R-value = 10 at 8' high. R-value may differ slightly for other heights.

MODEL

9405




Model 9405, Oak Park panel, Almond finish




Model 9405, Charleston panel, White finish, Decorative hardware


1 Choose Your Style




Charleston




Lexington




Westfield




Newport




Providence



Oak Park



Hampton



Camden

2 Choose Your Color

Painted Finishes



White (Standard)



Almond



Clay



Gray



Green



Brown


Two-Toned Painted Finishes



White/Clay



White/Gray



White/Green

3 Choose Your Windows



Cascade III



Clear II



Stockton III



Arched Stockton III Single



Arched Stockton III Double

MODEL 8600














Model 8600, Springfield panel, White-Almond finish, Somerton windows, Decorative hardware









Model 8600, Somerset Arched panel, White-Sandstone finish, Decorative hardware

1 Choose Your Style







 Bellview	 Springfield	 Lexington	 Kingston
 Richmond	 Ashburn	 Savannah	 Arlington
 Somerset	 Brunswick	 Westfield	Also available in solid arched top designs.

2 Choose Your Color

Painted Finishes

 White/White	 White/Almond
 White/Sandstone	 White/Terra Bronze
 White/Brown	 White/Black

3 Choose Your Windows

 Clear Long	 Somerton	 Wyndbridge
 Stockbridge	 Stockton	 Stockton Arch

Not all available window options shown. Window configuration may vary depending on door size. See Lowe's associate for a complete window selection.



Genie Residential Garage Door Openers

	WALL MOUNT/ DIRECT DRIVE		CHAIN/BELT																		
Genie Model																					
Model	6170H-B	4124H-B	4124H	3042	3120HL-B	7155	7055	3120H	1128	1028											
Standard Accessories	(1) 3 Button LED Light Fixture Wireless Wall Console Battery Backup Wi-Fi/Aladdin Connect Electric Lock	(1) 3 Button Wall Console Battery Backup Wi-Fi/Aladdin Connect	(1) 3 Button Wall Console Wi-Fi/Aladdin Connect	(2) 3 Button Wall Console Wireless Keypad	(1) 3 Button Wall Console Battery Backup Wi-Fi/Aladdin Connect	(2) 3 Button Wall Console Wireless Keypad Battery Backup Wi-Fi/Aladdin Connect	(2) 3 Button Wall Console Wireless Keypad Battery Backup	(3) 3 Button Wall Console Wireless Keypad	(1) 1 Button Push Button	(1) 1 Button Push Button	(1) 1 Button Push Button										
Max Door Height	14'	14'	14'	8'	10'	10'	10'	10'	8'	8'											
Power Rating	24Volt DC Motor	140Volt DC Motor	140Volt DC Motor	3/4 HPC	3/4 HPC	3/4 HPC	1/2 HPC	1/2 HPC	1/2 HPC	1/2 HPC											
Drive	Direct Drive	Belt of Chain	Belt of Chain	Belt	Belt of Chain	Belt	Belt	Chain	Belt	Chain											
Aladdin Connect																					
Lifting Force*	850 lbs	750 lbs	500 lbs	500 lbs	500 lbs	500 lbs	500 lbs	350 lbs	350 lbs	350 lbs											
Max Speed**	7.5 inches/sec	9.0 inches/sec	9.0 inches/sec	7.5 inches/sec	7.0 inches/sec	7.0 inches/sec	7.0 inches/sec	7.0 inches/sec	6.5 inches/sec	6.5 inches/sec											
Soft Start/Stop	Yes	Yes	Yes	Yes	Yes	No	No	Yes	No	No											
BBU Compatible	BBU Included	BBU Included	Yes	Yes	BBU Included	BBU Included	BBU Included	BBU Included	No	No											
Bulbs	Wireless Bluetooth LED	2 Light	2 Light	2 Light	2 Light Integrated LED	2 Light	2 Light	2 Light	1 Light	1 Light											
Motor Warranty*	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor	Limited Lifetime Motor											
Other Warranties*	5 Yrs Parts 1 Yr Accessories	15 Yrs Belt/ 5 Yr Chain 1 Yr Accessories	15 Yrs Belt/ 5 Yr Chain 1 Yr Accessories	15 Yrs Belt 1 Yr Accessories	15 Yrs Belt/ 5 Yr Chain 1 Yr Accessories	15 Yrs Belt 1 Yr Accessories	15 Yrs Belt 1 Yr Accessories	5 Yrs Chain 1 Yr Accessories	15 Yrs Belt 1 Yr Accessories	5 Yrs Chain 1 Yr Accessories											

NOTE: All models include auto seek dual frequency radios (315/390 MHz), use Intellicode® rolling code security and can be used with Aladdin Connect™. All models are also HomeLink® and Car2U® compatible.

*With a well balanced garage door. **+/- 0.5 inches per second. +Limited warranties. See manuals for details.

MODEL 2411

SECTIONAL STEEL DOOR



STRONG, VISUALLY APPEALING DOORS FOR MODERATE COMMERCIAL APPLICATIONS

Wayne Dalton's Model 2411 Sectional Steel Door, available in a variety of sizes, is an excellent value. Featuring nominal 24-gauge ribbed steel sections, Model 2411 is available with a number of insulation options.

- Nominal 24-gauge steel construction
- Standard sizes up to 14'2" WIDE and 14'1" high
- Optional polystyrene insulation
- Designed For Moderate Commercial Applications

LITE OPTIONS



Vision lites

COLOR AND FINISH OPTIONS




White Stucco-Embossed Finish

Commercial Doors



Model 8300AG, Medium Oak Plank Wood Grain Impressions finish, Clear IV vertical long windows

THERMAL PERFORMANCE



Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

Wayne Dalton™

2501 S. State Hwy. 121 Bus., Ste 200
Lewisville, TX 75067



wayne-dalton.com