



Comparison Guide

RESIDENTIAL GARAGE DOORS



Model 8300, Flush panel, Black Plank finish, Stockton Long 8-Lite windows



Model 8350, Microgroove panel, Blak Frost finish, Double Narrow windows



Model 8800, Standard Frames (4 panel), Anodized Black finish, White Laminated glass

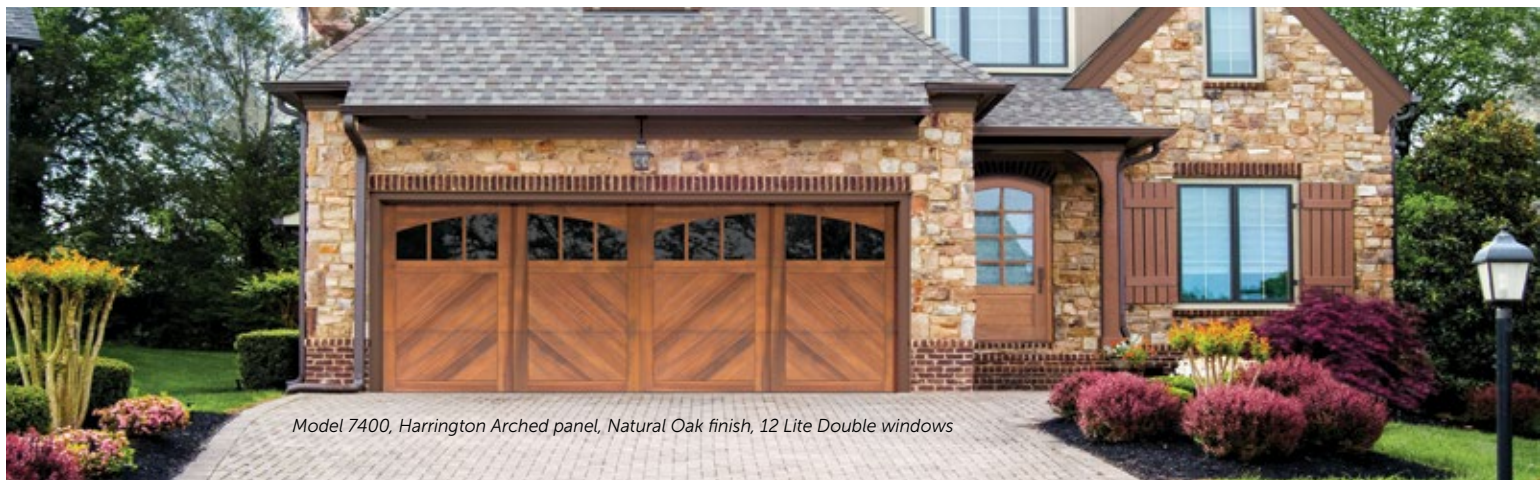
WOOD DOORS

		7000 SERIES	
		7100	7400
INSULATION	Insulation type	Polystyrene (optional)	Polystyrene (optional)
	R-value*	<2	4.75
DOOR SIZE AND CONSTRUCTION	Torsion counterbalance	•	•
	Width (minimum/maximum)**	6'/18'	6'/18'
	Available width increments	8', 9', 10', 12', 16', 18'	8', 9', 10', 12', 16', 18'
	Construction	Rail and stile	Flush with overlay
	Section thickness★	1-5/8"	2"
	Section joint	Shiplap	Shiplap
	Stain grade	•	•
	Paint grade	•	•
WOOD TYPE	Western Red Cedar	Optional on some models	Optional on some models
	Hemlock	Optional on some models	Optional on some models
	Sapele Mahogany	Optional on some models	Optional on some models
	Meranti	Optional on some models	Optional on some models
	Douglas Fir	Optional on some models	Optional on some models
	Knotty Cedar	Optional on some models	Optional on some models
	Marine Grade	Optional on some models	Optional on some models
	Rough Sawn Plywood	Optional on some models	Optional on some models
	Luan Meranti Plywood	Optional on some models	Optional on some models
GLASS OPTIONS	Clear	•	•
	Satin Etched	•	•
	Obscure	•	•
MISC.	Carriage House design options	5 designs	6 designs
	Divided windows	•	•
	Decorative hardware	•	•
	Wind load available***	•	•
	Warranty	1-Year Limited	1-Year Limited



*Wayne Dalton uses a calculated door section R-value for our insulated doors.

***See wind load document on each product for details and ratings.

★Section thickness may vary slightly depending on wood type.




Model 7400, Harrington Arched panel, Natural Oak finish, 12 Lite Double windows

	INSULATION			SPRING TYPE			DOOR SIZE			
MODEL	Insulation type	U-factor† 	R-value*	Torsion	TorqueMaster® Plus	Total Pack**	Width (min/max)	Width increments	Height (min/max)	
CARRIAGE HOUSE STEEL										
9405	Polyurethane	0.27	10	•	•		6'/9'	Common ²	6'/9'	
8600	Polyurethane	0.15	12.12				6'/18'	Common ¹	7'/9'	
8670	Polyurethane	0.16	11				6'/18'	1"	6'6"/12'	
CLASSIC STEEL										
8000	--	--	--	•	•		5'/20'	Common ³	6'/14'	
8024	--	--	--	•			5'/18'	Common ³	6'/14'	
8200	Polystyrene	--	7.4	•	•		5'/20'4"	Common ³	6'/14'	
8224	Polystyrene	--	7.4	•			5'/18'	Common ³	6'/14'	
9100	Polyurethane	0.25	9	•	•	•	6'/18'	6"	6'/9'	
9605	Polyurethane	0.26	10	•	•	•	4'/18'	6"	7'/13'11"	
8300	Polyurethane	0.15	12.12	•	•		4'/20'	1"	4'/14'	
8350	Polyurethane	0.15	12.12	•			4'/20'	1"	4'/14'	
8500	Polyurethane	0.12	16.22	•			6'/20'	1"	6'/14'	
DESIGNER STEEL										
8310	Polyurethane	0.15	12.12	•	•	•	6'/20'	1"	6'/14'	
Width increments: 1= 6', 7', 8', 9', 10', 12', 14', 15', 16', 18' 2=6', 8', 9', 10', 15', 16', 18' 3=6', 7', 8', 9', 10', 11', 12', 14', 15', 15'6", 15'8", 16', 17', 18', 20'										
COLOR OPTIONS	PAINT FINISHES									
MODEL	White	Almond	Desert Tan	Taupe	Sandstone	Gray	Terra Bronze	Green	Brown	Black
										
CARRIAGE HOUSE STEEL										
9405	•	•				•		•	•	
8600										
8670	•					•		•		
CLASSIC STEEL										
8000	•	•		•					•	•
8024	•	•								•
8200	•	•		•					•	•
8224	•	•								•
9100	•	•			•	•			•	•
9605	•	•			•	•			•	•
8300	•	•			•		•		•	•
8350										
8500	•	•			•		•		•	•
DESIGNER STEEL										
8310	•	•	•		•	•	•		•	•

For selection of windows for each product refer to Window Guide. With any of the above configurations, some product options may have additional limitations. See product literature.

	DOOR CONSTRUCTION							
Section heights (inch)	Construction	Section thickness	Section joint	Joint-to-joint seal	Thermal break	Wind load***	Colonial	Ranch
20.8, 23.8	Steel/Insulation/Steel	1-1/4"+ Integrated strut	Pinch-resistant	•		•		
20.8, 24	Steel/Insulation/Steel	1-3/8"+ Overlay	Tongue-and-groove	•	•	•		
20.8, 23.8, 25.73, 28	Steel/Insulation/Steel	1-5/8"	Tongue-and-groove	•	•			
18, 21	Steel	2"	Tongue-and-groove			•	•	•
18, 21	Steel	2"	Tongue-and-groove			•	•	•
18, 21	Steel/Insulation/ Vinyl	2"	Tongue-and-groove			•	•	•
18, 21	Steel/Insulation/ Vinyl	2"	Tongue-and-groove			•	•	•
19.1, 20.8, 23.8	Steel/Insulation/ ToughGard™	1"+ Integrated strut	Pinch-resistant	•		•		
19.1, 20.8, 23.8	Steel/Insulation/Steel	1-1/4"+ Integrated strut	Pinch-resistant	•		•		
18, 20.8, 24	Steel/Insulation/Steel	1-3/8"	Tongue-and-groove	•	•	•		
18, 20.8, 24	Steel/Insulation/Steel	1-3/8"	Tongue-and-groove			•		
18, 20.8, 24	Steel/Insulation/Steel	2"	Tongue-and-groove	•	•	•		
20.8, 23.8, 28	Steel/Insulation/Steel	1-5/8	Tongue-and-groove	•				



				Available in smooth and wood grain texture						
MODERN METALLIC				TWO-TONE PAINT FINISHES						
Clay	Silver	Dark Bronze	Black Frost	Green/White	Gray/White	Clay/White	White/White	Almond/White	Sandstone/ White	Terra Bronze/ White
										
•				•	•	•				
•				•	•	•	•	•	•	•
	•	•	•							

ture for additional details. *Wayne Dalton uses a calculated door section R-value for our insulated doors. †U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors a

[illegible]

nd specific product sizes. **Total Pack doors include weather stripping for top and sides. Product size limitations depend on product series. ***See wind load documents on website for details.

ONS		GLASS OPTIONS								
Impact glazing	Clear	Gray Tinted	Green Tinted	Bronze Tinted	Satin Etched Privacy	Obscure	Black Privacy	Warranty†	Price	MODEL
CARRIAGE HOUSE STEEL										
•	•	•	•	•	•	•		Limited Lifetime	\$	9405
•	•					•	•	Limited Lifetime	\$\$\$	8600
	•	•	•		•	•	•	Limited Lifetime	\$\$\$\$	8670
CLASSIC STEEL										
•	•	•				•		10-Year	\$	8000
	•							10-Year	\$	8024
•	•	•				•		10-Year	\$	8200
•	•							10-Year	\$	8224
•	•	•			•	•		Limited Lifetime	\$\$	9100
•	•	•			•	•		Limited Lifetime	\$\$	9605
•	•	•	•	•	•	•	•	Limited Lifetime	\$\$	8300
	•	•	•	•	•	•	•	Limited Lifetime	\$\$	8350
•	•	•	•	•	•	•	•	Limited Lifetime	\$\$	8500
DESIGNER STEEL										
	•	•			•	•		10-Year	\$	8310

STAIN FINISHES									COLOR OPTIONS
Clay	Gray	Green	Honduran Mahogany	Mahogany	Natural Oak	Red Oak	Walnut	TruChoice® Color System	MODEL
									
CARRIAGE HOUSE STEEL									
								•	9405
									8600
•	•	•	•	•	•	•	•	•	8670
CLASSIC STEEL									
									8000
									8024
									8200
									8224
									9100
								•	9605
								•	8300
									8350
								•	8500
DESIGNER STEEL									
								•	8310

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching before ordering your door.

			DESIGNER FIBERGLASS	SPECIALTY VINYL	CONTEMPORARY ALUMINUM				
			8680	8700	8800*		8850*		8450 Luminous®
INSULATION	Insulation type		Polyurethane	Polyurethane	Polyurethane (optional)		Polyurethane (optional)		
	U-factor† 		0.15	0.24	0.27 low E glass	0.29 Ins glass	0.28 low E glass	0.31 Ins glass	N/A
	R-value*		12	11.75	<4.36		<4.06		N/A
DOOR SIZE AND CONSTRUCTION	Counterbalance		Torsion	Torsion	Torsion		Torsion		Torsion
	Width (minimum/maximum)		6'/18'	8'/18'	6'/18'2"		6'/18'		6'/18'
	Width increments		Common	Common	1"		1"		1"
	Height (minimum/maximum)		6'6"/14'	6'/14'	6'/9'1"		6'/12'		6'1'/19'
	Section heights (inches)		16, 22, 24, 26, 28	18, 21	Equal		Equal		Equal
	Construction layers		Fiberglass/Steel/Insulation/Steel	Vinyl/Insulation/Vinyl	Aluminum frame		Aluminum frame		Aluminum frame
	Section thickness		1"	1-1/2"	2"		1-5/16"		1-5/8"
	Section joint		Tongue-and-groove	Tongue-and-groove	Tongue-and-groove		Tongue-and-groove		Tongue-and-groove
	Joint-to-joint seal			●	●		●		●
	Design options		4 designs	2 designs	N/A		N/A		N/A
DESIGN/ WINDOW OPTIONS	Decorative windows		●						
	Divided windows		●						
	Vertical Column windows		●						
GLASS OPTIONS	Clear		●	●	●		●		
	Gray Tinted		●		●		●		
	Green Tinted		●		●		●		
	Bronze Tinted		●		●		●		
	Satin Etched		●	●	●		●		
	White Laminated				●		●		
	Obscure		●	●	●		●		
	Polycarbonate				●		●		
	Opaque White								●
	Opaque Black								●
	Mirrored Gray								●
	Mirror Bronze								●
	Translucent Black								●
	MISC.	Decorative hardware		●					
Wind Load available			●						
Warranty		Limited Lifetime	15-Year	One-Year		One-Year		One-Year	
Price		\$\$\$\$\$	\$\$\$	\$\$\$\$\$		\$\$\$\$\$		\$\$\$\$\$\$\$	
COLOR OPTIONS			DESIGNER FIBERGLASS	SPECIALTY VINYL	CONTEMPORARY ALUMINUM				
			8680	8700	8800	8850	8855	8450 Luminous®	
PAINT FINISHES	Glacier White			●					
	Adobe Cream			●					
	Monterey Sand			●					
	Cape Cod Gray			●					
	White					●	●		
	Brown					●	●		
STAIN FINISHES	White		●						
	Clay		●						
	Gray		●						
	Green		●						
	Honduran Mahogany		●						
	Mahogany		●						
	Natural Oak		●						
	Red Oak		●						
	Cherry		●						
	Walnut		●						
ALUMINUM FINISHES	Clear Anodized				●	●	●		
	Light Bronze Anodized						●		
	Medium Bronze Anodized						●		
	Dark Bronze Anodized				●	●	●	●	
	Black Anodized				●	●	●	●	
	White Powder Coat				●			●	
	Dark Bronze Powder Coat				●	●		●	
	Black Powder Coat				●	●		●	
	RAL Powder Coat				●	●	●		

AFTER

BEFORE



Model 8670, Providence panel, Custom paint finish,
12 Window Square windows

Garage Door DESIGN CENTER

Discover the perfect garage door for your home with our Garage Door Design Center. Upload a photo of your home, experiment with panel designs, colors, window styles, and decorative hardware, and visualize the transformation. Try it today by scanning the QR code or visiting wayne-dalton.com—your journey to enhanced curb appeal starts with just a click!



THERMAL PERFORMANCE



Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

Wayne Dalton™

DISTRIBUTED BY:

2501 S. State Hwy. 121 Bus., Ste 200
Lewisville, TX 75067

wayne-dalton.com

